

***KING FAHD UNIVERSITY OF PETROLEUM & MINERALS***  
***COLLEGE OF COMPUTER SCIENCES & ENGINEERING***

***COMPUTER ENGINEERING DEPARTMENT***

**COE-543 – Mobile and Wireless Networks**

**May 18<sup>th</sup>, 2009 – Midterm Exam**

**Student Name:**

**Student Number:**

**Exam Time: 90 mins**

---

- Do not open the exam book until instructed
- The use of programmable and cell phone calculators is not allowed – only basic are permitted
- **Answer ALL Questions**
- All steps must be shown
- Any assumptions made must be clearly stated

Question No.	Max Points	
1	40	
2	40	
3	50	

Total: 130

**Q.1) (40 points) On the subject of RF propagation**

a) Microcellular RF pathloss models are widely used for characterizing environments for outdoor mobile cellular networks.

a.1) **(10 points)** sketch a typical signal-power versus distance relation for **microcellular** RF pathloss models.

a.2) **(10 points)** List the input parameters that typically influence the **microcellular** path loss models?

b) Consider an RF channel whose wideband impulse response function,  $h(t)$ , is given by

$$h(t) = \sum_{i=0}^L \alpha_i \delta(t - \tau_i) \exp(j\phi_i)$$

The above function defines the multipath delay spread for the RF link.

b.1) **(10 points)** Define the quantities  $\alpha_i$ ,  $\tau_i$ , and  $\phi_i$  indicating their characteristics (randomness, distribution, units, etc)?

b.2) **(10 points)** Such channels suffer from a phenomenon called “irreducible error rate”. Briefly (in not more than few sentences), explain this phenomenon and outline its principle cause?



**Q2) (40 points)** on the subject of physical layer issues for wireless communications:

a) **(20 points)** Using the figure shown, answer the following questions:

a.1) Which modulation scheme is most bandwidth efficient? Why?

a.2) Which modulation scheme is best in terms of adjacent channel interference? Why?


a.3) How are QPSK and OQPSK schemes similar or different?

b) **(20 points)** The side lobes for QPSK can be further improved if a pulse shaping filter is used.

b.1) What is the ideal pulse shape that can be used? Is it practical and why?

b.2) One can utilize a raised cosine pulse (RCP) shape as well. The RCP shape is controlled using a parameter  $0 \leq \beta \leq 1$ . Draw the frequency representation for the RCP filter and show the effect of  $\beta$ .

**Solution:**

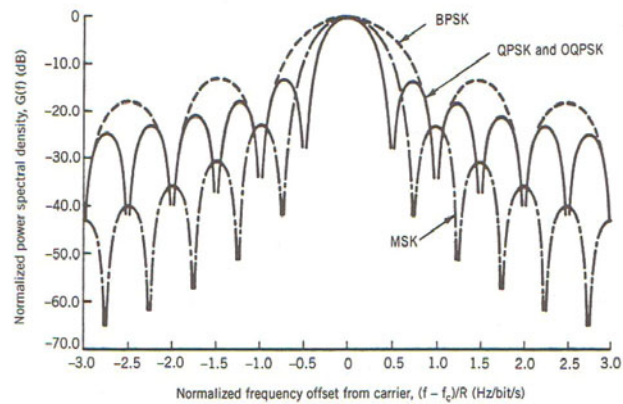



**Q3) (50 points)** We have an installed cellular system with 100 sites, a frequency reuse factor of  $N = 7$ , and 500 overall two-way channels:

a) **(10 points)** Give the number of channels per cell, total number of channels available to the service provider, and the minimum carrier-to-interference ratio ( $C/I$ ) of the system in dB. Assumes a pathloss exponent of 4.


b) To expand the network, we decide to create an underlay-overlay system where the new system uses a frequency reuse factor of  $N = 3$ .

b.1) **(10 points)** If  $R_0$ ,  $D_0$  are the cell radius and reuse distance for the underlay system, respectively, while  $R_1$  and  $D_1$  are the cell radius and reuse distance of the overlay system, respectively. Draw the frequency plan on the figure below? (i.e. put down the channel set number for both underlay and overlay systems). Indicate on the figure the quantities  $R_0$ ,  $D_0$ ,  $R_1$ , and  $D_1$ .

b.2) **(5 points)** Using the figure of b.1 - show that  $D_1 = 3 R_0$ ?

b.3) **(10 points)** What is the quantity  $D_1/R_1$  equal to? Why?

b.4) **(15 points)** Give the number of channels assigned to inner and outer cells to keep a uniform density over the entire coverage area.

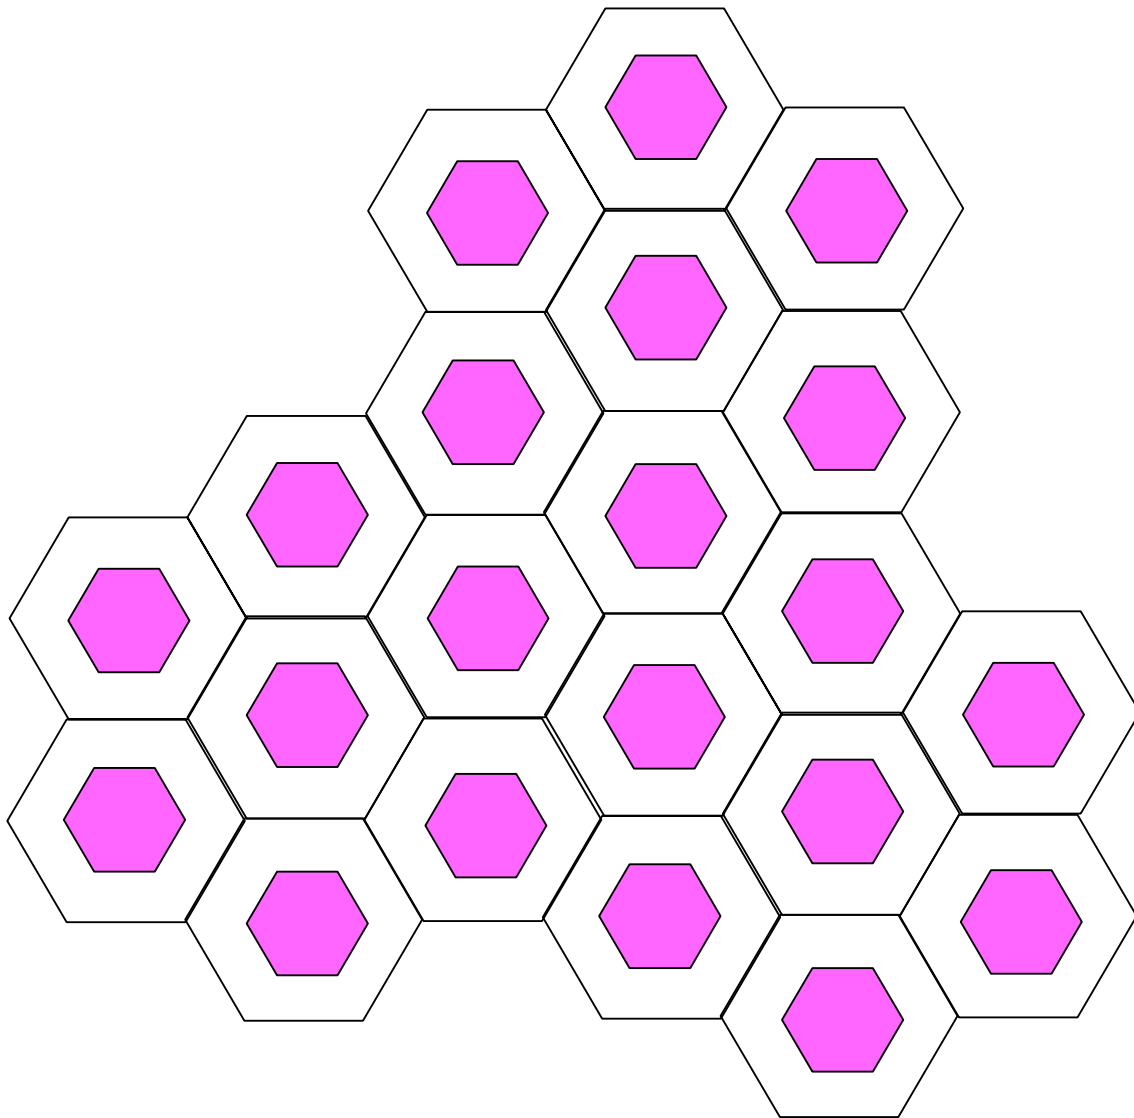

**Figure for Q3 – b.1 – underlay-overlay network**