

William Stallings

Data and Computer Communications

Chapter 4 Transmission Media

These slides are originally for W. Stallings.

Overview

- Guided - wire
- Unguided - wireless
- Characteristics and quality determined by medium and signal
- For guided, the medium is more important
- For unguided, the bandwidth produced by the antenna is more important
- Key concerns are data rate and distance


Design Factors

- Bandwidth
 - Higher bandwidth gives higher data rate
- Transmission impairments
 - Attenuation
- Interference
- Number of receivers
 - In guided media
 - More receivers (multi-point) introduce more attenuation

Slides originally by W. Stallings

3

Electromagnetic Spectrum

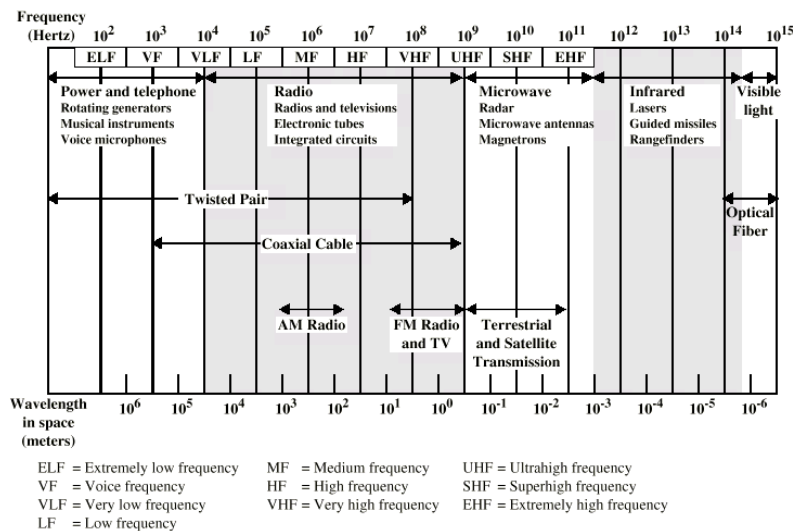

4

Guided Transmission Media

- Twisted Pair
- Coaxial cable
- Optical fiber


Table 4.1 Point-to-Point Transmission Characteristics of Guided Media [GLOV98]

	Frequency Range	Typical Attenuation	Typical Delay	Repeater Spacing
Twisted pair (with loading)	0 to 3.5 kHz	0.2 dB/km @ 1 kHz	50 μ s/km	2 km
Twisted pairs (multi-pair cables)	0 to 1 MHz	3 dB/km @ 1 kHz	5 μ s/km	2 km
Coaxial cable	0 to 500 MHz	7 dB/km @ 10 MHz	4 μ s/km	1 to 9 km
Optical fiber	180 to 370 THz	0.2 to 0.5 dB/km	5 μ s/km	40 km

THz = TeraHerz = 10^{12} Hz

5

Attenuation of Typical Guided Media

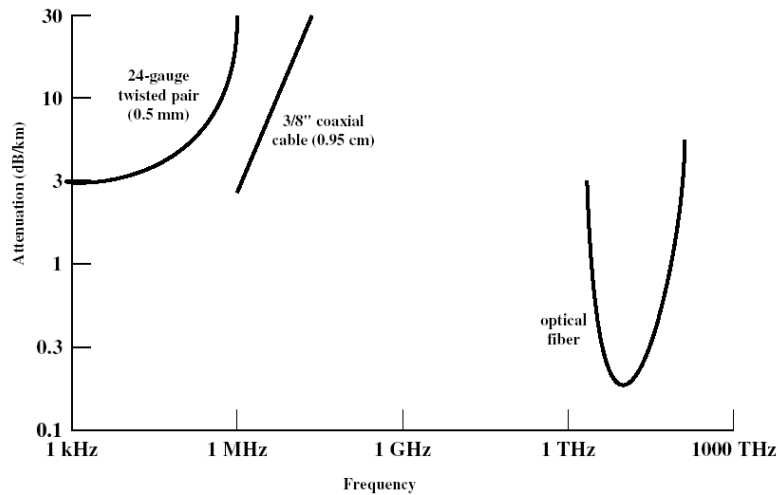

Slides originally by W. Stallings

6

Twisted Pair

- Separately insulated
- Twisted together
- Often "bundled" into cables
- Usually installed in building during construction



(a) Twisted pair

- Usually more than one pair bundled together
- Nearby pairs have different twist length to reduce crosstalk
- Twist length 5 cm to 15cm
- Wire thickness 0.4 to 0.9 mm

Slides originally by W. Stallings

7

Twisted Pair - Applications

- Most common medium
- Telephone network
 - Between house and local exchange or end-office (subscriber loop)
- Within buildings
 - To private branch exchange (PBX)
- For local area networks (LAN)
 - 10Mbps or 100Mbps (for high rates – limited number of devices and distance)

Slides originally by W. Stallings

8

Twisted Pair - Pros and Cons

- Cheap
- Easy to work with
- Low data rate
- Short range: repeaters required every few hundred meters

Slides originally by W. Stallings

9

Twisted Pair - Transmission Characteristics

- Analog
 - Amplifiers every 5km to 6km
- Digital
 - Use either analog or digital signals
 - repeater every 2km or 3km (This may be wrong, few hundred meters is the answer)
- Limited distance: highest attenuation relative to other guided media
- Limited bandwidth (1MHz)
- Limited data rate (100MHz)
- Susceptible to interference and noise

Slides originally by W. Stallings


10

Unshielded and Shielded TP

- Unshielded Twisted Pair (UTP)

- Ordinary telephone wire
- Cheapest
- Easiest to install
- Suffers from external EM interference

Unshielded Twisted Pair (UTP)

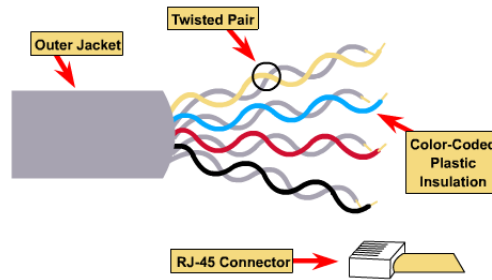

- Speed and throughput: 10 - 100 Mbps
- Average \$ per node: Least Expensive
- Media and connector size: Small
- Maximum cable length: 100m (short)

Slides originally by W. Stallings


11

Unshielded and Shielded TP

- Shielded Twisted Pair (STP)

- Metal braid or sheathing that reduces interference
- More expensive
- Harder to handle (thick, heavy)

STP (Shielded Twisted Pair)

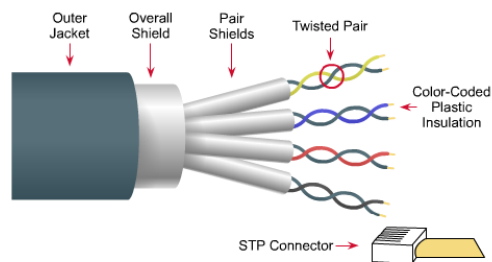

- Speed and throughput: 10 - 100 Mbps
- Average \$ per node: Moderately Expensive
- Media and connector size: Medium to Large
- Maximum cable length: 100m (short)

Slides originally by W. Stallings

12

UTP Categories (Recognized by EIA-568)

- Cat 3
 - up to 16MHz
 - Voice grade found in most offices
 - Twist length of 7.5 cm to 10 cm
- Cat 4
 - up to 20 MHz
- Cat 5
 - up to 100MHz
 - Commonly pre-installed in new office buildings
 - Twist length 0.6 cm to 0.85 cm


Cat 3 and Cat 5 are ones mostly used for LAN applications:
- Differ in number of twists

EIA = Electronic Industries Association

13

UTP Categories

CAT 5 Cable

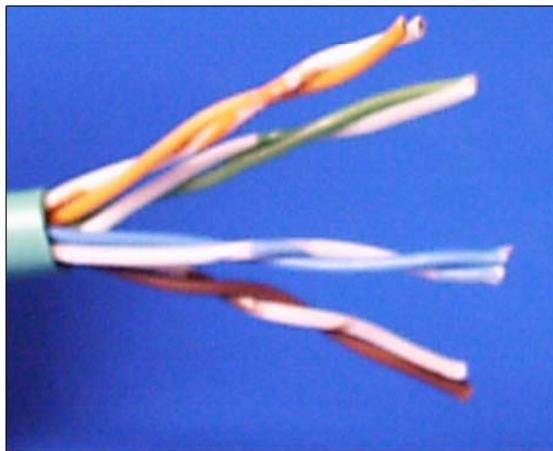


Slides originally by W. Stallings


14

RJ-45 Connector

Multiport Repeaters (Hubs)

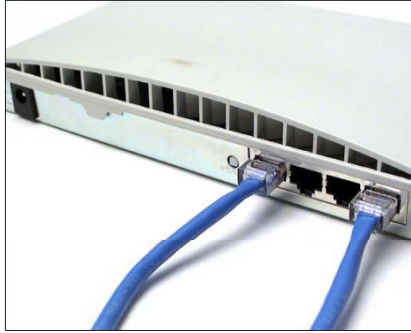

RJ-45 Front

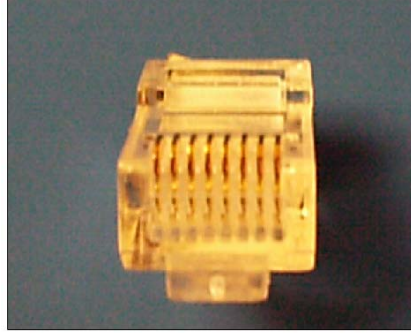

Slides originally by W. Stallings

15

Near End Crosstalk

- Coupling of signal from one pair to another
- Coupling takes place when transmit signal entering the link couples back to receiving pair
- i.e. near transmitted signal is picked up by near receiving pair

Slides originally by W. Stallings

16

STP vs. UTP


Table 4.2 Comparison of Shielded and Unshielded Twisted Pair

Frequency (MHz)	Attenuation (dB per 100 m)			Near-end Crosstalk (dB)		
	Category 3 UTP	Category 5 UTP	150-ohm STP	Category 3 UTP	Category 5 UTP	150-ohm STP
1	2.6	2.0	1.1	41	62	58
4	5.6	4.1	2.2	32	53	58
16	13.1	8.2	4.4	23	44	50.4
25	—	10.4	6.2	—	41	47.5
100	—	22.0	12.3	—	32	38.5
300	—	—	21.4	—	—	31.3

Slides originally by W. Stallings

17

Coaxial Cable

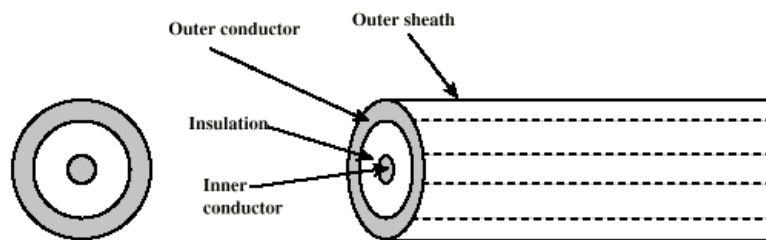

- Outer conductor is braided shield
- Inner conductor is solid metal
- Separated by insulating material
- Covered by padding


- To allow operation over wider range of frequencies
- Diameter of 1 to 2.5 cm
- Because of shielding, much less susceptible to interference and crosstalk

Slides originally by W. Stallings

18

Coaxial Cable

Coaxial Cable

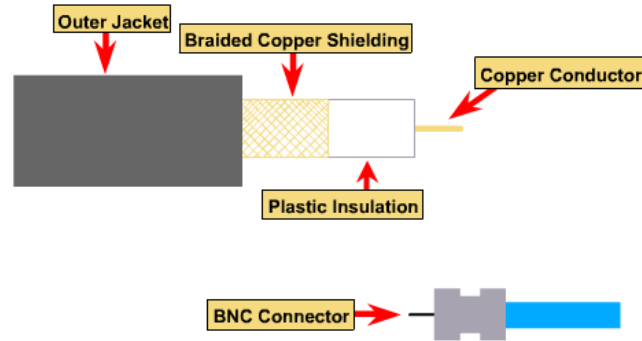

- ◆ Speed and throughput: 10 - 100 Mbps
- ◆ Average \$ per node: Inexpensive
- ◆ Media and connector size: Medium
- ◆ Maximum cable length: 500m (medium)

19

Coaxial Cable Applications

- Most versatile medium
- Television distribution
 - Ariel to TV
 - Cable TV
- Long distance telephone transmission
 - Can carry 10,000 voice calls simultaneously (using FDM)
 - Being replaced by fiber optic
- Short distance computer systems links
- Local area networks

Slides originally by W. Stallings

20

Coaxial Cable - Transmission Characteristics

- Analog
 - Amplifiers every few km
 - Closer if higher frequency
 - Up to 500MHz
- Digital
 - Repeater every 1km
 - Closer for higher data rates

Performance limited by attenuation, thermal noise, and intermodulation noise

Slides originally by W. Stallings

21

Coaxial Cable - Transmission Characteristics


10BASE2 50 Ohm Coax Cable




22

Optical Fiber

- Core: one or more thin strands or fibers (8 to 100 μ m)
- Cladding: glass or plastic coating with different optical properties than the core
- Core/Cladding interface: reflector – confine ray
- Jacket: protection against moisture, abrasion, crushing ...

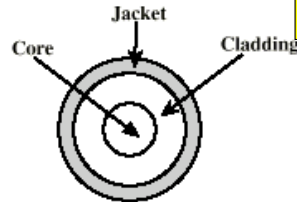

- Glass or plastic core
- Laser or light emitting diode
- Specially designed jacket
- Small size and weight

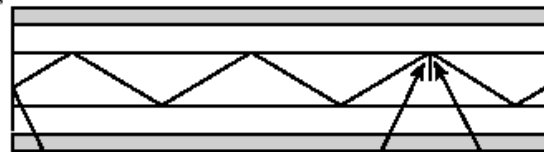


- Lowest losses using ultrapure fiber – difficult to manufacture
- Higher loss multicomponent glass fibers are more economical
- Plastic fiber is the cheapest used for short-haul links

23

Optical Fiber

Fiber Optic Cable

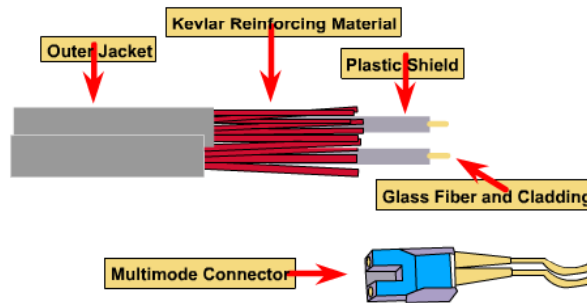

- ◆ Speed and throughput: 100+ Mbps
- ◆ Average \$ per node: Most Expensive
- ◆ Media and connector size: Small
- ◆ Single mode, maximum cable length: Up to 3000m
- ◆ Multimode mode, maximum cable length: Up to 2000m
- ◆ Single mode: One stream of laser-generated light
- ◆ Multimode: Multiple streams of LED-generated light

24

Optical Fiber - Benefits

- Greater capacity
 - Data rates of hundreds of Gbps
- Smaller size & weight
- Lower attenuation
- Electromagnetic isolation
- Greater repeater spacing
 - 10s of km at least

Slides originally by W. Stallings

25

Optical Fiber - Applications

- Long-haul trunks
- Metropolitan trunks
- Rural exchange trunks
- Subscriber loops
- LANs

Slides originally by W. Stallings

26

Optical Fiber - Transmission Characteristics

- Act as wave guide for 10^{14} to 10^{15} Hz
 - Portions of infrared and visible spectrum
- Light Emitting Diode (LED)
 - Cheaper
 - Wider operating temp range
 - Last longer
- Injection Laser Diode (ILD)
 - More efficient
 - Greater data rate
- Wavelength Division Multiplexing

LED – ILD: semiconductor devices that emit a beam when voltage is applied


Slides originally by W. Stallings

27


Optical Fiber Transmission Modes



(a) Step-index multimode More than one path for signal – distortion
Limits maximum data rate

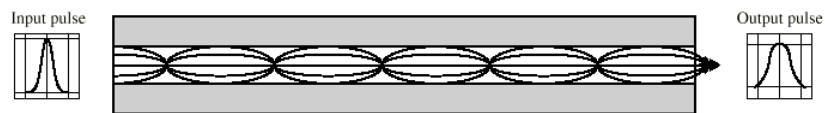


(b) Graded-index multimode Intermediate mode

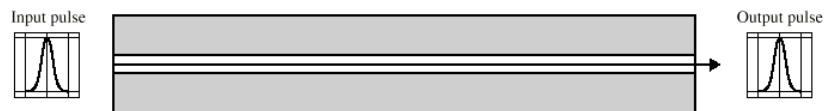

(c) Single mode One path for signal – superior signal quality
Used for long-haul telephone and TV comm

Wireless Transmission

Encoding Signals as Electromagnetic Waves

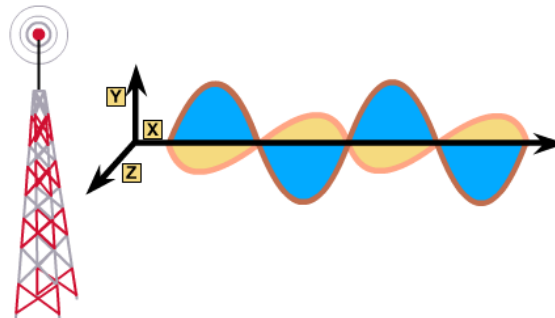

Slides originally by W. Stallings

29

Wireless Transmission

- Unguided media
- Transmission and reception via antenna
- Directional
 - Focused beam
 - Careful alignment required
- Omnidirectional
 - Signal spreads in all directions
 - Can be received by many antennae

Slides originally by W. Stallings

30

Frequencies


- 2GHz to 40GHz - Microwave
 - Highly directional
 - Point to point
 - Satellite
- 30MHz to 1GHz - Radio
 - Omnidirectional
 - Broadcast radio
- 3×10^{11} to 2×10^{14} - Infrared
 - Local point-to-point or point-to-multipoint in indoor applications

Slides originally by W. Stallings

31

Antenna

- Definition: An electrical conductor or system of conductors used either for radiating electromagnetic energy or for collecting electromagnetic energy.
- General receiver/Transmitter structure
- Receiver/transmit characteristics of an antenna are the same
- Isotropic antenna – is a point in space that radiates power in all directions equally.
 - Referred to as omni-directional antenna

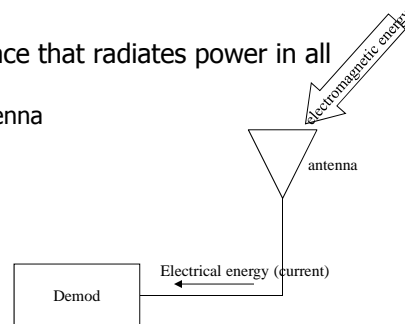


General Receiver Structure

Slides originally by W. Stallings

32

Parabolic Reflective Antenna

- Used in terrestrial microwave and satellite applications

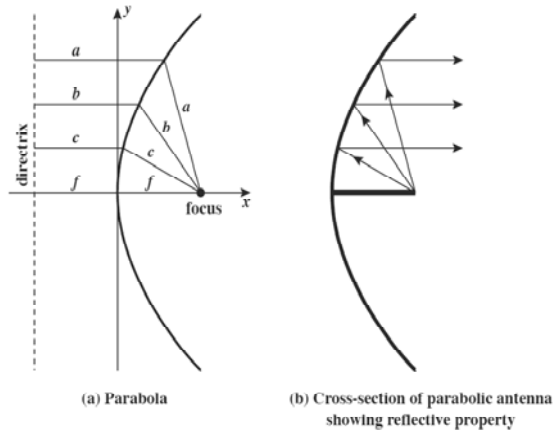

Slides originally by W. Stallings

33

Antenna Gain

- Definition: the power output, in a particular direction, compared to that produced in any direction by a perfect omni-directional antenna.
- It is a measure of directionality.
- Effective Area – a concept related to the physical size and shape of antenna
- Gain is given by

$$G = \frac{4 \pi A_e}{\lambda^2}$$

Where G – antenna gain
 A_e – effective antenna area
 λ – carrier wavelength

- For an ideal isotropic antenna – $A_e = \lambda^2 / (4 \pi) \rightarrow G = 1$ or 0 dB
- For a parabolic antenna with face area of A – $A_e = 0.56A \rightarrow G = 7A / \lambda^2$

Slides originally by W. Stallings

34

Antenna Gain - Example

- Problem: Consider a parabolic reflective antenna with a diameter of 2 m operating at 12 GHz, what is the effective area and the antenna gain?
- Solution:
face area, $A = \pi r^2 \rightarrow \pi \text{ m}^2$
effective area, $A_e = 0.56 A = 0.56 \pi \text{ m}^2$
wavelength, $\lambda = c/f = 3 \times 10^8 / 12 \times 10^9 = 0.025 \text{ m}$
then Gain, $G = 4 \pi A_e / \lambda^2 = 35,180$, or
 $G_{\text{dB}} = 10 \log_{10}(35,180) = 45.46 \text{ dB}$

Slides originally by W. Stallings

35

Terrestrial Microwave

- Parabolic dish
- Focused beam
- Line of sight
- Long haul telecommunications (4-6 GHz and 11 GHz)
- Higher frequencies give higher data rates



Slides originally by W. Stallings


36

Transmission Characteristic

- Free-Space loss model

$$P_r/P_t = G_t G_r * [\lambda / (4\pi d)]^2$$

where: P_t – transmitted power level
 P_r – received power level
 G_r – receive antenna gain
 G_t – transmit antenna gain
 λ – carrier frequency wavelength
 d – distance between transmitter and receiver

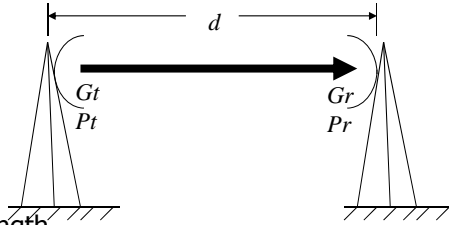

- **Path loss** is defined as $L = P_t/P_r$ – usually measured in dBs (i.e. $L_{dB} = 10\log_{10}(L) = 10\log_{10}(P_t/P_r)$)
- If G_t and G_r are not given – assume $G_t = G_r = 1$.

Slides originally by W. Stallings

37

Satellite Microwave


- Satellite is relay station
- Satellite receives on one frequency, amplifies or repeats signal and transmits on another frequency
- Requires geo-stationary orbit
 - Height of 35,784km
- Television
- Long distance telephone
- Private business networks

Slides originally by W. Stallings

38


Satellite Communication Configurations

- Point-to-point link (uplink: 5.925-6.425 GHz, downlink: 3.7-4.2 GHz) – 4/6 GHz band

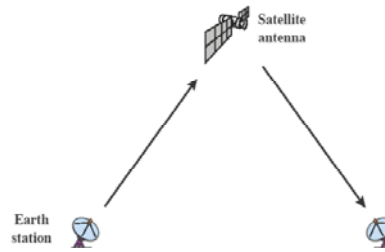

(a) Point-to-point link

- Broadcast link
- Typical range 1-10GHz
 - Below 1 GHz – noise
 - Above 10GHz – atmospheric absorption
- 12/14 GHz and 20/30 GHz are also being used

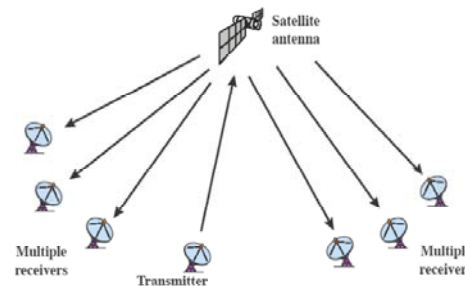


(b) Broadcast link

Slides originally by W. Stallings

39

Applications

- Public Broadcasting services (PBS)
- Direct Broadcasting Satellite (DBS)
- Very Small Aperture Terminal (VSAT)

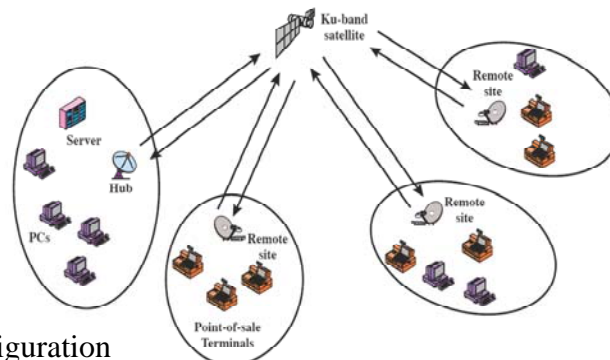

Typical VSAT Configuration

Slides originally by W. Stallings

40

Broadcast Radio

- Omnidirectional; 30 MHz ~ 1 GHz
- FM radio
- UHF and VHF television
- Line of sight
- Suffers from multipath interference
 - Reflections

Slides originally by W. Stallings

41

Infrared


- Modulate noncoherent infrared light
- Line of sight (or reflection)
- Blocked by walls
- e.g. TV remote control, IRD port

Slides originally by W. Stallings


42

Wireless Propagation


- Ground Wave propagation
 - Freq < 2 MHz
 - Signal tends to follow earth's curvature – scattered by atmosphere
 - Application - AM radio
- Sky Wave propagation
 - 2 MHz < Freq < 30 MHz
 - Signal from earth is reflected by Ionosphere – perhaps several hops
 - Application: armature radio, CB, and international broadcasts
- Line of Sight (LOS) propagation
 - Freq > 30 MHz
 - Optical versus Effective LOS

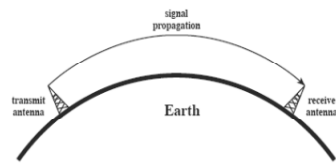

(a) Ground-wave propagation (below 2 MHz)

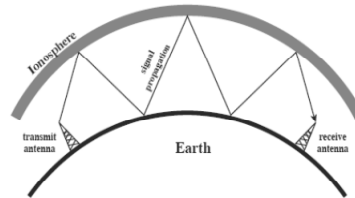

(b) Sky-wave propagation (2 to 30 MHz)

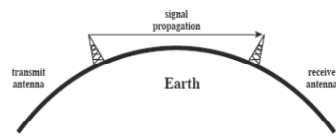

(c) Line-of-sight (LOS) propagation (above 30 MHz)

Slides originally by W. Stal


Line Of Sight Propagation

- The optical LOS distance in kilometers, d , is given by

$$d = 3.57\sqrt{h}$$
 where h is the antenna height in meters.
- The effective LOS distance in kilometers, d , is given by

$$d = 3.57\sqrt{Kh}$$
 where K is an adjustment factor $\sim 4/3$
- The maximum distance between two towers for LOS is given by

$$d_{\max} = 3.57[\sqrt{Kh_1} + \sqrt{Kh_2}]$$

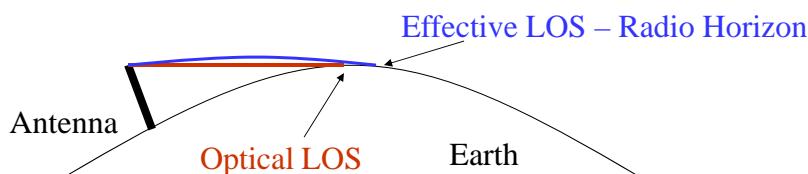

Slides originally by W. Stallings

44

Example

- Problem: Assume an earth station is transmitting 250 Watts directed to an asynchronous satellite at the height of 35,863 km. If the carrier frequency is 4 GHz, calculate:
 - a) the path loss assuming isotropic antennas
 - b) the path loss assuming the antenna gain for satellite and ground station to be 44 dB and 48 dB, respectively.
 - c) what is the power level received at the satellite?

Slides originally by W. Stallings

45

Example – cont'd

- Solution:

Path Loss, $L = P_t/P_r = 1/\{G_t G_r * [\lambda / (4\pi d)]^2\}$
 wavelength, $\lambda = c/f = 3 \times 10^8 / 4 \times 10^9 = 0.075$ m

a) for isotropic antennas $\rightarrow G_t = G_r = 1$;
 $L = 1/\{1 \times 1 \times [0.075 / (4\pi \times 35853 \times 10^3)]^2\}$
 $= 3.6087 \times 10^{19}$

$L_{dB} = 10 \times \log_{10}(L) = 195.6$ dB

b) for $G_r = 44$ dB (or $1044/10 = 25,119$) and $G_t = 48$ dB (or $63,096$)

Therefore,

$L = 1/\{25119 \times 63096 \times [0.075 / (4\pi \times 35853 \times 10^3)]^2\}$
 $= 2.2769 \times 10^{10}$

$L_{dB} = 10 \times \log_{10}(L) = 103.6$ dB

c) Power received at satellite:

$L = P_t/P_r \rightarrow P_r = P_t/L = 250 / 2.2769 \times 10^{10}$
 $= 1.0980 \times 10^{-8}$ Watts

$P_{r_{dBW}} = 10 \times \log_{10}(P_r) = -79.6$ dBW

Another way for

b) $L_{dB} = L_{dB_{isotropic}} - G_{t_{dB}} - G_{r_{dB}}$
 $= 195.6 - 44 - 48$
 $= 103.6$ dB

Another way for

c) $P_t = 250$ Watts $\rightarrow P_{t_{dBW}} = 10 \times \log_{10}(250) = 24$ dBW
 $P_{r_{dBW}} = P_{t_{dBW}} - L_{dB} = 24 - 103.6 = -79.6$ dBW

Slides originally by W. Stallings

46

Required Reading

- Stallings Chapter 4

Slides originally by W. Stallings

47

Dammam-Riyadh Microwave Link Design Problem:

	Parameter	
Typical Inputs	d_total (km)	Overall distance between Dammam and Riyadh
	C (b/s)	Desired capacity for link
	B (Hz)	Bandwidth of system
	T (degrees Kelvin)	Effective temperature of the transmit-recvie system
Main computed Quantities	d_1	Maximum distance between any two subsequent towers allowed by earth's curvature
	d_2	Maximum distance between any two subsequent towers allowed by Shannon's capacity formula
	d_max	Maximum distance between any two subsequent towers to satisfy both criteria (earth's curvature and capacity requirement)

11/19/2013

Dr. Ashraf S. Hasan Mahmoud

48

Dammam-Riyadh Microwave Link Design Problem – cont'd:

- Details given in class (on board)
- Quiz problem