



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04Q 7/38, 7/22	A2	(11) International Publication Number: WO 98/18282 (43) International Publication Date: 30 April 1998 (30.04.98)
(21) International Application Number: PCT/US97/19305 (22) International Filing Date: 24 October 1997 (24.10.97) (30) Priority Data: 08/736,625 24 October 1996 (24.10.96) US (71) Applicant (for all designated States except US): NORTHERN TELECOM LIMITED [-/CA]; World Trade Center of Montreal, 8th floor, 380 St. Antoine Street West, Montreal, Quebec H2Y 3Y4 (CA). (72) Inventors; and (75) Inventors/Applicants (for US only): ABU-AMARA, Marwan [-/US]; 1302 Rusk Drive, Richardson, TX 75081 (US). SIDES, Steve [US/US]; Apartment 1312, 600 Legacy Drive, Plano, TX 75023 (US). JALALI, Ahmad [CA/US]; 7424 Wildflower Drive, Plano, TX 75024 (US). BOPPANA, Jyoti [US/US]; 1421 Debon Drive, Plano, TX 75075 (US). DOCTOR, Satyajit [IN/US]; 4161 Caminito Davila, San Diego, CA 92122 (US). (74) Agent: CRANE, John, D.; Northern Telecom Limited, Patent Dept., P.O. Box 833858, Richardson, TX 75083-3858 (US).		(81) Designated States: BR, CA, US, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>Without international search report and to be republished upon receipt of that report.</i>
(54) Title: CMDA INTER-MOBILE SWITCHING CENTER SOFT HAND-OFF (57) Abstract The present invention facilitates an inter-mobile switching center (MSC) soft hand-off by creating a communication link between the MSCs through the base station controllers (BSCs). The routers in the BSCs are linked to form a virtual router. This faster link between the BSCs enables the same protocol to be used for intra-MSC soft hand-off used for inter-MSC soft hand-off.		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

CDMA INTER-MOBILE SWITCHING CENTER SOFT HAND-OFF

BACKGROUND OF THE INVENTION

5

I. FIELD OF THE INVENTION

The present invention relates to radio communications. More particularly, the present invention relates to code division multiple access (CDMA) cellular radiotelephone systems.

10

II. DESCRIPTION OF THE RELATED ART

A typical prior art radiotelephone system is illustrated in FIG. 1. This system is comprised of multiple cells covering a geographic region. For clarity, this figure shows only cell A and cell B. The cells are coupled to a mobile switching center (MSC) that routes the calls from the cells to the public switched telephone network (PSTN). The MSC also routes the calls from the PSTN to the appropriate cells communicating with the radiotelephone.

The system may have multiple MSCs, each handling a number of cell sites. The MSCs are linked by voice and signaling trunks. The signaling communication lines can be either a direct link or a network of communication links that introduces a substantial delay on the order of seconds.

In this system, three communication links must be established in order for a radiotelephone to communicate with the public switched telephone network (PSTN). A radio link is first established between the radiotelephone (100) and the base station (105). Next, a link (110) between the base station (105) and the mobile switching center (115) is established. Lastly, the MSC (115) forms a link with the PSTN (120).

As the radiotelephone moves from cell A's coverage area to cell B's coverage area, the radio link between the radiotelephone and cell A becomes weak. Since the radiotelephone is moving into cell B's area, the

30

radiotelephone establishes a new communication path to the PSTN to prevent dropping of the call. The three links described above must now be set up through cell B. The process of moving from one cell to another without dropping the call is referred to in the art as a hand-off.

5 In code division multiple access (CDMA) cellular systems, this hand-off is typically accomplished as a soft hand-off. A soft hand-off enables the radiotelephone to move from communicating with cell A to communicating with cell B without losing contact with cell A.

10 In CDMA systems, each cell transmits a unique pilot signal that identifies the cell to the radiotelephone. When the radiotelephone is communicating with cell A, it is continuously monitoring pilot A as well as other pilot signals from neighboring cells, such as cell B. CDMA systems in general and pilot signals in particular are described in Telecommunications Industry Association/Electronic Industry Association Interim Standard -
15 95A (TIA/EIA IS-95A).

As the radiotelephone moves away from the coverage of cell A, the strength of pilot B increases while the strength of pilot A decreases. The radiotelephone continues to monitor pilot A as long as the pilot remains above a predetermined threshold defined in IS-95A.

20 If the strength of pilot B exceeds a certain threshold, the radiotelephone sends a Pilot Strength Measurement Message to cell A, as described in IS-95A, indicating that the radiotelephone wishes to establish a radio link with cell B. Cell A forwards the message to the MSC so that the MSC knows to allocate another path from the radiotelephone to the PSTN.
25 After the path is allocated, the radiotelephone is directed to communicate with cell B.

The radiotelephone, however, does not stop communicating with cell A unless pilot A has dropped below the minimum strength threshold. While the radiotelephone is communicating with both cells A and B, the cells
30 forward the signal received from the radiotelephone to the same MSC. The MSC picks the best received signal and transforms the signal to a PSTN compatible signal in the pulse code modulated (PCM) format and directs the

PCM signal to the PSTN. Signals received by the MSC from the PSTN are handled in a similar, reverse manner.

When the radiotelephone has moved away from cell A so that pilot A has dropped below the minimum threshold, the radiotelephone breaks
5 communication with cell A. The radiotelephone, however, remains in contact with the PSTN through cell B. This is referred to in the art as an intra-MSC soft hand-off since the same MSC is used by both cells.

A problem exists when cell A uses one MSC and cell B uses a different MSC. In this case, due to the time delay introduced by the signaling
10 communication network between the MSCs, the inter-MSC soft hand-off is prevented from occurring reliably and, therefore, increases the chance that the call will be dropped when the radiotelephone changes from one cellular system containing the initial MSC to another cellular system containing the other MSC. There is a resulting unforeseen need for a system that performs
15 a reliable, inter-MSC soft hand-off.

SUMMARY OF THE INVENTION

The process of the present invention encompasses the soft hand-off of
20 a radiotelephone from one cellular system, the source cellular system, to another cellular system, the target cellular system. Each cellular system is comprised of a mobile switching center, a base station controller, and a number of base transceiver systems. Each base station controller is comprised of a router and a number of vocoders. The radiotelephone initially
25 communicates with the public switched telephone network (PSTN) through one mobile switching center.

A communication link connecting the base station controllers of the two cellular systems facilitates the inter-mobile switching center soft hand-off. This is accomplished by first assigning router address groups to the
30 source and target entities that are connected to the source and target routers, respectively. The source and target routers are then connected by a communication link.

The router port connecting the source router to the target router is assigned the target router address group. The router port connecting the target router to the source router has the source router address group. When the source router receives a packet intended for the target base transceiver system, it forwards the packet to the port connecting the source router to the target router. The target router receives the packet and, based on the destination address, forwards the packet to the target base transceiver system.

The present invention enables the source and target routers to operate as one virtual router. This permits the existing signaling protocol software, used in an intra-mobile switching center soft hand-off, to be used for inter-mobile switching center soft hand-offs.

BRIEF DESCRIPTION OF THE DRAWINGS

15

FIG. 1 shows a block diagram of a typical prior art cellular system.

FIG. 2 shows a block diagram of the radiotelephone system of the present invention.

FIG. 3 shows a message flow of the process of the present invention.

20

FIG. 4 shows a message flow of another alternate embodiment process.

FIG. 5 shows a message flow of another alternate embodiment process.

25

FIG. 6 shows a source cellular system and its neighboring cellular systems.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

The system and process of the present invention enables a radiotelephone to be handed-off between two cells that have different mobile switching centers (MSCs). By providing a communication link between the base station controllers (BSCs), the signal that is received by both cells from

the radiotelephone can be compared. Thus, the best signal can be chosen for use by the system.

FIG. 2 illustrates a diagram of the cellular radiotelephone system of the present invention. The radiotelephone system is comprised of multiple cellular systems covering a geographical region. In the interest of clarity, FIG. 2 illustrates only two such cellular systems (200 and 250).

Each cellular system (200 and 250) of the preferred embodiment is comprised of an MSC (210 and 255), a BSC, and a number of base transceiver systems (BTS) (225 - 227, 270, and 271). Each BSC is comprised of at least one vocoder (260-264) and a router (220 and 265). In the preferred embodiment, each BSC has a number of vocoders (260-264).

In the subsequent discussion, the cellular system initially communicating with the radiotelephone is referred to as the source system (200) and the cellular system to which the radiotelephone is to be handed-off is the target system (250). Each entity of each of the cellular systems, therefore, is referred to as the source MSC or target MSC, source vocoder or target vocoder, etc.

In the preferred embodiment, the MSCs (210 and 255) are coupled to the PSTN through a T1 line that is well known in the art. The T1 line is a North American standard signal line. This signal line conducts a pulse code modulated (PCM), 24 channel, serial signal between the PSTN and the MSC. Alternate embodiments use other signal lines to couple the MSCs to the PSTN.

The MSCs (210 or 255) perform switching of a call from the PSTN to the appropriate cellular system and vice versa. The MSCs also validate the subscriber radiotelephone to determine if that subscriber is a resident of the system or a roamer. In the preferred embodiment, the MSCs each control a number of cells.

The vocoders (260-264) transform signals from one type of digital representation to another. For example, the vocoder transforms a 64 kbps pulse-code modulated speech signal to a lower rate signal such as 13 or 8

kbps. Vcoders are discussed in greater detail in IS-96A and are well known in the art.

The routers (220 and 265), well known in the art, are comprised of multiple input/output ports, each port being assigned an address range. A
5 router (220 or 265) receives a data packet on an input port that is coupled to another entity in the cellular system. The router interprets the destination address embedded in the packet and directs the data packet to one of its output ports based on this address.

The source router (220) dedicates at least one port for every possible
10 target router in the radiotelephone system. The possible target routers are those routers in the neighboring cellular systems. The system of the present invention couples routers, through their input/output ports, of each BSC with a communication link that enables the routers to communicate. The inter-router link provides a much faster communication link than using the
15 inter-MSB network link.

The BTSs (225 - 227, 270, and 271) are the cell site equipment used to communicate with the radiotelephone. FIG. 2 illustrates three source BTSs and two target BTSs. However, other embodiments use other quantities of BTSs for the source and target systems.

20 In the preferred embodiment, the BSC is separate from the MSC. Alternate embodiments use MSCs with integral vocoders and routers.

FIG. 6 illustrates a source cellular system (601) and its neighboring cellular systems (602 - 607). In the preferred embodiment, there are six neighboring cellular systems (602 - 607). Alternate embodiments have other
25 quantities of neighboring systems.

FIG. 6 also illustrates that the available addresses for router ports are distributed in a certain reuse pattern throughout the radiotelephone system. The router port addresses are grouped into router address groups that are each labeled with a designator A through G. Each recurrence of a
30 particular letter is a reuse of the same router address group.

In the preferred embodiment, the radiotelephone system is an $N = 7$ system indicating that seven router address groups are used before the

groups are reused. The concept of router address groups reuse is similar to the frequency reuse plan found in U.S. Patent No. 5,483,667 to Faruque, assigned to Northern Telecom Limited and incorporated herein by reference.

FIG. 2 illustrates the various connections of the entities within each source and target cellular system. Within the source cellular system (200),
5 the PSTN (205) conducts a signal to the MSC (210) that switches the signal to the appropriate source BTS, depending on which BTS is being used by the radiotelephone.

A source vocoder (264) takes the signal from the MSC (210) and
10 transforms it to a lower bit rate signal. The router (220) takes the vocoded signal and routes it to the appropriate destination BTS (225 - 227), based on the address, from the vocoder, in the received signal. Note that if the radiotelephone is in soft hand-off with multiple source BTSs, the vocoded signal is routed to all of the source BTSs that are involved in the soft hand-
15 off.

If the signal is sent, for example, to the source BTS (225), the BTS (225) transmits the signal to the radiotelephone (280). Signals received from the radiotelephone (280) are routed in a similar, reverse manner.

When the radiotelephone is moving from one cell, such as the source
20 cell (203), to another cell, such as the target cell (201), it must be handed-off before the call is lost. The present invention enables this process to occur when the cells (201 and 203) are connected to different MSCs (210 and 255), as illustrated in FIG. 2.

The present invention performs inter-MSC hand-off even if the
25 radiotelephone is moving from multiple source cells (203-205) to multiple target cells (201 and 202). In the interest of clarity, however, the subsequent discussion only shows the embodiment of the radiotelephone moving from one cell connected to one MSC to another cell connected to another MSC. The multiple target and source cells embodiment is performed in the same
30 manner as the preferred embodiment of single target and source cells.

The source BTS (225) and the target BTS (270) are the cell site equipment for the source cell (203) and the target cell (201) respectively.

The following discussion does not distinguish between the cells (201 and 203) and their corresponding BTSs (270 and 225).

To facilitate a soft hand-off between the two BTSs (225 and 270), it is important to be able to route the signal received by an entity, such as the source vocoder (264), from the source MSC (210) to the two BTSs (225 and 5 270). Similarly, it is important to be able to route the signal sent by the radiotelephone (280) and received by the two BTSs (225 and 255) to the same vocoder, such as vocoder (264).

The present invention provides a soft hand-off when the two BTSs 10 (225 and 270) are connected to different MSCs (210 and 255), as illustrated in FIG. 2. The present invention facilitates the soft hand-off through two primary steps.

First, the router address groups reuse pattern, shown in FIG. 5, is used to assign different router address groups to the source and target 15 entities that are connected to the source and target routers, respectively. For example, the router address group A (501) is assigned to the source entities that are connected to the source router (220). The router address group B (502) is assigned to the target entities that are connected to the target router (265).

Each source entity that is connected to the source router is assigned 20 an address that belongs to the router address group A. For example, the source vocoder (264) can be assigned the address A_1 , where A_1 belongs to the router address group A. Similarly, each target entity that is connected to the target router is assigned an address that belongs to the router address 25 group B. For example, the target BTS (270) can be assigned the address B_1 , where B_1 belongs to the router address group B.

The second step is to connect the source and the target routers by a communication link. The port connecting the source router to the target router is then configured with the address range of the router address group 30 B. The port connecting the target router to the source router is configured with the address range of the router address group A.

With these two steps, the source vocoder (264), for example, can send a packet to the target BTS (270) by setting the destination address of the packet to the address, B₁, that was assigned to the target BTS. In this example, only the port connecting the source router (220) to the target
5 router (265) is configured to have the address range of the router address group B. Therefore, when the source router receives the packet, the source router forwards the packet to the port connecting the source router to the target router. Hence, the target router receives the packet and, based on the destination address, forwards the packet to the target BTS (270). Packets
10 sent from the target BTS to the source vocoder are routed in a similar, reverse manner.

As seen above, the present invention causes the source router and the target router to operate as one virtual router. Thus, the inter-MSC soft hand-off operates as an intra-MSC soft hand-off allowing the existing
15 signaling protocol software, used in intra-MSC soft hand-off, to be used for an inter-MSC soft hand-off. In this manner, the cost of implementing the present invention is substantially reduced.

Furthermore, the inter-router link provides a much faster communication link than using the inter-MSC network link. Hence, the
20 execution of the inter-MSC soft hand-off over the virtual router is significantly faster than the execution of the inter-MSC soft hand-off over the inter-MSC network link.

After a successful inter-MSC soft hand-off, if the radiotelephone desires to drop the last remaining source BTS from the active list, then the
25 radiotelephone uses the process of the present invention illustrated in FIG. 3. This message flow shows the various actions and reactions from the source and target entities to drop the source BTS.

The process begins with the radiotelephone sending a pilot strength measurement message to the source vocoder (300). This message indicates
30 the radiotelephone's desire to drop the source BTS. The source vocoder transmits a hand-off direction message to the radiotelephone (305) directing it to drop the source BTS. Even though it is dropped from the active

communication list, the BTS may remain on the radiotelephone's neighboring cell list, as specified in IS-95A.

After the radiotelephone complies with the hand-off direction message, the radiotelephone sends a hand-off completion message to the source vocoder (310). This message indicates that the source BTS has been
5 dropped from the active list.

The source vocoder then sends a vocoder switch message to the source MSC (315) informing it that an inter-MSC vocoder switch is required. The vocoder switch message contains fields for the addresses of the radio
10 elements that the target vocoder should use, the Walsh codes of the specified radio elements, and the suggested CDMA system time that the vocoder switch should occur. A Walsh code is a unique code assigned to each radiotelephone that is communicating with the BTS and is discussed in detail in IS-95A.

15 The source vocoder starts a timer (315), subsequently referred to as Timer1. This timer is used to verify that a response is received within a predetermined length of time.

The source MSC passes the vocoder switch message, received from the source vocoder, to the target MSC (320). The target MSC allocates a
20 target vocoder and transmits the vocoder switch message to that target vocoder (325). The vocoder switch message contains all of the information that was transmitted from the source vocoder above.

The target vocoder then transmits a switch vocoder message to the target BTS(s) (330). This informs the target BTS(s) about the suggested
25 CDMA system time at which the vocoder switch will occur. This message also includes the address of the target vocoder. The target BTS(s) acknowledges the time of vocoder switching by sending a switch acknowledge message to the target vocoder (335).

When the switch vocoder message is transmitted, the target vocoder
30 starts a timer (330) subsequently referred to as Timer2. As with Timer1, Timer2 is used to verify that a response is received within a predetermined length of time.

After the target vocoder receives the switch acknowledge message from the target BTSs, the target vocoder stops Timer2. If the switch acknowledge message was received in less than 1 second, in the preferred embodiment, it is a valid response. Alternate embodiments use other time
5 thresholds for Timer2. If a response is not received prior to the time threshold, the process is aborted.

Upon receiving the switch acknowledge message from all target BTSs, the target vocoder sends an acknowledge switch message to the target MSC (340) confirming that the target vocoder will become the controlling
10 vocoder.

The target MSC allocates a voice trunk upon receiving the acknowledge switch message from the target vocoder. The target MSC then sends an acknowledge switch message to the source MSC (345) informing it that the time of vocoder switching has been agreed upon.

15 The source MSC then informs the source vocoder (350) that the time of vocoder switching has been agreed on. At this point, the source vocoder stops Timer1 (350). If the source MSC responded back within 10 seconds, in the preferred embodiment, it is a valid response. Alternate embodiment use other time thresholds for Timer1. If a response is not received prior to the
20 time limit, the process is aborted.

At the specified CDMA system time for switching vocoders, the target vocoder transmits a hand-off direction message to the radiotelephone (355) to reset layer 2, as described in IS-95A. The target vocoder also resets the hand-off direction message sequence number and checks layer 3
25 communications with the radiotelephone, as described in IS-95A. The radiotelephone's active set of cell sites does not change.

The radiotelephone transmits a hand-off completion message back to the target vocoder (360). This indicates that the hand-off directions have been completed by the radiotelephone. At this point, the target vocoder
30 transmits a hand-off complete message to the target MSC (365) indicating that the target vocoder is now in control of the call. This message also

indicates that the radiotelephone is now communicating directly with the target vocoder instead of the source vocoder.

The target MSC next sends a switch command to the source MSC (370). This switch command directs the source MSC to switch the PSTN trunk to the allocated voice trunk. This enables the target MSC to communicate with the PSTN through the source MSC.

The source MSC, upon receiving the switch command from the target MSC, switches the PSTN trunk to the allocated voice trunk. The source MSC then transmits a switch complete message to the source vocoder (375). This message informs the source vocoder to release any call related vocoder resources.

In the preferred embodiment, the source MSC is used to interface the target MSC with the PSTN after the hand-off. This saves time and signaling overhead in setting up the target MSC to handle the source MSC's tasks.

Furthermore, in the preferred embodiment, it can be seen that the source vocoder remains in charge of the current call until the radiotelephone sends a signal indicating that it wishes to drop the remaining source BTS from the active list. At this point, the source vocoder initiates the vocoder switching procedures.

Another alternate embodiment of the process of the present invention, illustrated in FIG 4, shows how to drop the source vocoder using the inter-MSD hard hand-off procedure. This process combines the inter-MSD soft hand-off process with an inter-MSD hard hand-off process. The inter-MSD hard hand-off process is explained in greater detail in EIA/TIA IS-95A and EIA/TIA IS-41C.

In this alternate embodiment, the source vocoder remains in charge of the current call until the radiotelephone sends a signal indicating that it wishes to drop the remaining source BTS from the active list. At this point, the source vocoder initiates the inter-MSD hard hand-off procedures. Note that the protocol between the source MSC and the target MSC can be an IS-41 standard protocol or any other protocol.

Referring to FIG. 4, the process begins with the radiotelephone sending a pilot strength measurement message to the source vocoder (401). This message indicates the radiotelephone's desire to drop the source BTS. The source vocoder transmits a hand-off direction message to the radiotelephone (405) directing it to drop the source BTS. Even though it is dropped from the active communication list, the BTS may remain on the radiotelephone's neighboring cell list, as specified in IS-95A.

After the radiotelephone complies with the hand-off direction message, the radiotelephone sends a hand-off completion message to the source vocoder (410). This message indicates that the source BTS has been dropped from the active list.

The source vocoder next sends a hard hand-off message to the source MSC informing the MSC that an inter-MSC hard hand-off is needed (415). This message includes fields for Walsh codes and the pilot codes of the target BTSs with which the radiotelephone is currently in communication. The source vocoder also starts Timer1 at this time.

The source MSC then passes the hard hand-off message on to the target MSC (420). The target MSC allocates a target vocoder and sends an allocate radio message to the target vocoder (425).

The target vocoder sends an allocate radio message to the target BTS (430). This instructs the BTS to allocate a radio resource or resources to which the radiotelephone will tune. The allocate radio message also contains the address of the target vocoder. The target vocoder also starts Timer2 at this time.

The target BTS acknowledges the allocation of the radio(s) (435). This is accomplished by the BTS sending a radio allocated message to the target vocoder.

Upon receiving the radio allocated acknowledgment from all of the target BTSs, the target vocoder transmits an acknowledge inter-MSC hard hand-off message to the target MSC (440). This confirms that the target vocoder will become the controlling vocoder.

The target MSC then allocates a voice trunk upon receiving the acknowledge message from the target vocoder. The target MSC transmits an acknowledge inter-MSC hard hand-of message to the source MSC (445).

The source MSC sends an acknowledge inter-MSC hard hand-off
5 message to the source vocoder (450). This message informs the source vocoder that a target vocoder and target radio(s) have been allocated. The source vocoder stops Timer1 at this time.

The time from Timer1 is compared to the predetermined time
threshold of 10 seconds to determine if the response is valid. If the response
10 was not received within the predetermined time threshold, the process is aborted.

Upon receiving the inter-MSC hard hand-off acknowledge from the source MSC, the source vocoder sends a hand-off direction message to the radiotelephone (455). This message directs the radiotelephone to tune to the
15 newly allocated target radio frequency or frequencies.

The radiotelephone then sends back, to the source vocoder, a hand-off completion message (460). This message indicates that the radiotelephone has complied with the retuning to the new frequencies and the inter-MSC hard hand-off has been completed.

20 Upon detecting the presence of the radiotelephone in the target cellular system, the target vocoder sends a hand-off complete message to the target MSC (465). This message indicates that the target vocoder is now in control of the call.

The target MSC directs the source MSC to switch the PSTN trunk to
25 the allocated voice trunk by sending a switch command message (470). Upon receiving this message, the source MSC switches the PSTN trunk to the allocated voice trunk and sends a switch complete message to the source vocoder to release any call related vocoder resources (475).

It can be seen that the radiotelephone is able to perform an inter-
30 MSC soft hand-off with multiple target BTSs, the source vocoder remaining in charge of the current call as long as the radiotelephone is communicating with at least one source BTS. For example, if the radiotelephone (280) in

FIG. 2 is in soft hand-off with two target BTSs (270 and 271) and one source BTS (225), the source vocoder (264) remains in charge of the current call as long as the radiotelephone is communicating with the source BTS (225).

There are two options for sending packets between the source vocoder and the target BTSs. In the first option, the source vocoder sends a packet, over the inter-router communication link, to every target BTS (270 and 271) in the active list of the radiotelephone. The source vocoder also receives a packet, over the inter-router communication link, from every target BTS (270 and 271) in the active list of the radiotelephone. This option is employed in the two embodiments described earlier.

The second option, that is an alternate embodiment of the process of the present invention, employs the allocation of a target vocoder. This option uses the selector portion of the allocated target vocoder to send packets between the source vocoder and the target BTSs.

The selector is an entity in the vocoder that receives data packets associated with the same call that a radiotelephone is making from multiple target BTSs. The selector selects the best packet from among the received packets and forwards this packet to the source vocoder. The selector also receives a data packet from the source vocoder and distributes the packet to the multiple target BTSs.

When the radiotelephone is communicating with several target BTSs, each of these BTSs must forward the traffic and signaling to the source vocoder over the communication link interconnecting the source and target routers (and vice versa). Thus, to reduce the traffic over this communication link, the inter-MSC selector allocation procedure is performed as illustrated in FIG. 5.

For this procedure, the source vocoder remains in control of the current call for the duration of the call. Also, the source vocoder requests from the target system to allocate a selector within a target vocoder. For each voice data packet that the source vocoder receives from the PSTN, the source vocoder forwards only one packet to the allocated selector over the communication link. The selector then distributes the packet it receives

from the source vocoder to each target BTS with which the radiotelephone is communicating.

Similarly, when each target BTS with which the radiotelephone is communicating forwards a packet to the source vocoder, the selector chooses
5 the best packet from among the received packets from the target BTSs. The selector then forwards only the best packet to the source vocoder over the communication link.

The selector allocation procedure also eliminates the need for voice trunks between two MSCs. In this embodiment, a T1 line is used to
10 interconnect the source and target routers. A High-level Data Link Control (HDLC), an international standard for data link control protocol, transports packets between the source and target routers. Also, the maximum packet size is 48 octets and the source vocoder is a 9.6 kbps vocoder with about 50% of speech activity.

15 With these assumptions, it can be determined that the T1 line can carry about 127 calls. If the same T1 line is used for voice trunks between the two MSCs, the maximum calls that the T1 can carry is 24. Therefore, by using the inter-MSC selector allocation procedure, a T1 carries about five times the amount of calls than the same T1 used as a voice trunk between
20 the two MSCs.

Referring to FIG. 5, the radiotelephone first transmits the pilot strength measurement message to the source vocoder indicating that the radiotelephone wishes to add a target BTS (500). The source vocoder transmits an allocate selector message to the source MSC (505) that informs
25 the source MSC that an inter-MSC selector allocation is needed.

The allocate selector message contains multiple fields. These fields include the Walsh codes and the pilot code of the target BTS with which the radiotelephone wishes to communicate. At this point, the source vocoder starts Timer1.

30 The source MSC passes, to the target MSC, the allocate selector message received from the source vocoder (510). The target MSC allocates a target vocoder and a selector within the target vocoder. The target MSC

then sends the allocate radio message, containing all the information received from the source vocoder, to the target vocoder (515).

The target vocoder transmits an allocate radio message to the target BTS (520) so that the target BTS allocates a radio resource to which the radiotelephone can communicate. The message contains the address of the
5 target vocoder. The target vocoder now starts Timer2.

The target BTS acknowledges the allocation of a radio by sending a radio allocated message to the target vocoder (525). Upon receiving the radio allocated message, the target vocoder stops Timer2 and checks to determine
10 if the response was received in time. If the response was not received in time, the process is aborted.

The target vocoder then sends a selector allocated message to the target MSC (530). This confirms that the target vocoder has allocated a selector and that the target BTS has allocated a radio.

15 The target MSC sends a selector allocated message to the source MSC (535) confirming that a target vocoder and a selector within the target vocoder have been allocated. This message also confirms that the target BTS has allocated a radio. Furthermore, the message contains the address of the allocated target vocoder.

20 The source MSC transmits a selector allocated message (540) to the source vocoder informing it that a target vocoder and a selector within the target vocoder have been allocated. This message also informs the source vocoder that the target BTS has allocated a radio. This message contains the address of the allocated target vocoder. The source vocoder stops Timer1
25 and verifies that the response was received in time. If the response was not received in time, the process is aborted.

Upon receiving the selector allocated message, the source vocoder transmits a hand-off direction message to the radiotelephone (545) to add the target BTS to the radiotelephone's active cell list. This message also
30 informs the radiotelephone to begin communicating with the target BTS.

The radiotelephone transmits back to the source vocoder a hand-off completion message (550). This message indicates completion of the hand-off directions.

The radiotelephone may transmit the pilot strength measurement
5 message to the source vocoder a second time. This indicates that the radiotelephone wishes to add another target BTS (555). In this case, the source vocoder uses the address of the target vocoder, obtained in step (540), to transmit an allocate radio message to the target selector (560). At this point, the source vocoder starts Timer1.

10 The allocate radio message contains multiple fields. These fields include Walsh code and pilot code of the target BTS with which the radiotelephone wishes to communicate.

The target selector passes, to the target BTS, the allocate radio message received from the source vocoder, and starts Timer2 (565). The
15 target BTS allocates a radio resource to which the radiotelephone can communicate.

The target BTS acknowledges the allocation of a radio by sending a radio allocated message to the target vocoder (570). Upon receiving the radio allocated message, the target vocoder stops Timer2 and checks to determine
20 if the response was received in time. In the preferred embodiment, this time is one second. Alternate embodiments use other time thresholds.

The target vocoder then passes the radio allocated message to the source vocoder (575) confirming that a radio at the target BTS was allocated. Upon receiving the radio allocated message from the target, the
25 source vocoder stops Timer1 and verifies that the response was received in time. In the preferred embodiment, this time is 10 seconds. Alternate embodiments use other time thresholds.

The source vocoder then transmits a hand-off direction message to the radiotelephone (580) to add the target BTS to the radiotelephone's active
30 cell list. This message informs the radiotelephone to begin communicating with the target BTS. The radiotelephone transmits back to the source

vocoder a hand-off completion message (585). This message indicates the completion of the hand-off directions.

In summary, by providing a faster, inter-MSB communications link through the BSC, the present invention facilitates inter-MSB soft hand-off.

5 This provides a more reliable hand-off for the radiotelephone. The probability of a dropped call as the result of the hand-off between two MSBs is greatly reduced using the present invention. Additionally, since the existing intra-MSB hand-off signaling protocol software can be used, the present invention provides these benefits economically.

10

WE CLAIM:

CLAIMS

1. A method for configuring a radiotelephone system to accomplish a
2 soft hand-off of a radiotelephone from a first cellular system to a second
cellular system, the first cellular system comprising a plurality of first
4 entities including a first router having a plurality of ports, the second
cellular system comprising a plurality of second entities including a second
6 router having a plurality of ports, the method comprising the steps of:
assigning a first router address group to the plurality of first entities;
8 assigning a second router address group to the plurality of second
entities; and
10 coupling the first and the second routers with a communication link.

2. The method of claim 1 wherein the step of coupling includes
2 coupling the first and the second routers through a first port of the plurality
of ports of each router.

3. The method of claim 2 and further including the steps of:
2 configuring the first port of the first router to have an address range
of the second router address group; and
4 configuring the first port of the second router to have an address
range of the first router address group.

4. The method of claim 1 and further including the step of
2 transmitting a data packet from the first cellular system to at least one of
the plurality of second entities, the data packet comprising an address
4 within the second router address group.

5. A method for configuring a radiotelephone system to accomplish a
2 soft hand-off of a radiotelephone from a first cellular system to a second
cellular system, the first cellular system comprising a plurality of first
4 entities including a first router having a plurality of ports, the second

cellular system comprising a plurality of second entities including a second
6 router having a plurality of ports, the method comprising the steps of:
 assigning a first router address group to the plurality of first entities;
8 assigning a second router address group to the plurality of second
entities;
10 coupling a first port of the first router and a first port of the second
router with a communication link;
12 assigning the second router address group to the first port of the first
router; and
14 assigning the first router address group to the first port of the second
router.

6. A method for performing a soft hand-off of a radiotelephone from a
2 source cellular system to a target cellular system, the source cellular system
comprising a plurality of source entities including a source router having a
4 plurality of ports, the target cellular system comprising a plurality of target
entities including a target router having a plurality of ports, the method
6 comprising the steps of:
 assigning a source router address group to the plurality of source
8 entities;
 assigning a target router address group to the plurality of target
10 entities;
 coupling the source and the target routers with a communication link;
12 the radiotelephone transmitting a signal to the source cellular system
requesting a hand-off; and
14 instructing the radiotelephone to communicate with the target
cellular system.

7. A method for addressing a plurality of cellular system systems,
2 including a source cellular system, each cellular system having an area of
radio signal coverage and comprising a plurality of entities including at

4 least one router having a plurality of communication ports, the method
comprising the steps of:
6 allocating at least one communication port of the plurality of
communication ports for each cellular system having overlapping radio
8 signal coverage with the source cellular system;
reserving a router address range for each communication port; and
10 distributing the reserved router address ranges among the plurality
of communication ports such that the reserved address ranges do not repeat
12 within a predetermined number of cellular systems.

8. A method for routing messages from a first radio communication
2 system to a second radio communication system, the first and second radio
communication systems being part of a plurality of radio communication
4 systems, each radio communication system comprising a router and a
plurality of entities that include a plurality of base transceiver systems, a
6 mobile switching center, and a plurality of vocoders, the method comprising
the steps of:
8 the first radio communication system allocating at least one
communication port for each radio communication system of the plurality of
10 radio communication systems;
assigning a range of addresses to each allocated communication port;
12 assigning an address to each entity in each radio communication
system;
14 a first entity in the first radio communication system transmitting a
message to the first radio communication system router;
16 the first radio communication system router interpreting the
message;
18 the first radio communication system router forwarding the message
to the second radio communication system router;
20 the second radio communication system router interpreting the
message; and

22 the second radio communication system router forwarding the
message to the appropriate entity in the second radio communication
24 system.

9. The method of claim 8 wherein the steps of interpreting include
2 reading the entity address contained in the message.

10. A cellular radiotelephone system that facilitates a soft hand-off of
2 a radiotelephone between a source mobile switching center and a target
mobile switching center, the system comprising:

4 a source cellular system comprising a plurality of source entities, the
plurality of source entities including a source router having a plurality of
6 ports, each port having an assigned address range, the source router coupled
to a target cellular system and routing data signals in response to addresses
8 present in the data signals; and

the target cellular system comprising a plurality of target entities,
10 the plurality of target entities including a target router having a plurality of
ports, each port having an assigned address range different from the
12 plurality of assigned address ranges of the source router, the target router
coupled to the source cellular system and routing data signals to the source
14 cellular system in response to addresses present in the data signals.

11. The system of claim 10 and further including a communication
2 link between the first mobile switching center and the second mobile
switching center.

12. The system of claim 10 and further including each of the source
2 entities having an assigned address.

13. The system of claim 10 and further including each of the target
2 entities having an assigned address.

14. A cellular radiotelephone system that facilitates a soft hand-off of
2 a radiotelephone between mobile switching centers, the system comprising:
a first cellular system comprising:
4 a first mobile switching center coupled to a public switched
telephone network; and
6 a first router, comprising a plurality of ports, for routing data
signals in response to addresses present in the data signals, the first
8 router assigned a first range of addresses and having a first port
coupled to the first mobile switching center;
10 a second cellular system comprising:
a second mobile switching center; and
12 a second router, comprising a plurality of ports, for routing
data signals in response to addresses present in the data signals, the
14 second router assigned a second range of addresses, a first port
coupled to the second mobile switching center; and
16 a communication link, coupled between the first router and the
second router such that data signals from the first router, having an address
18 in the second range of addresses, are conducted to the second router and
data signals from the second router, having an address in the first range of
20 addresses, are conducted to the first router.

15. The system of claim 14 and further including:
2 a first vocoder coupled to a second port of the first router;
a first base transceiver system coupled to a third port of the first
4 router;
a second vocoder coupled to a second port of the second router; and
6 a second base transceiver system coupled to a third port of the second
router.

16. The system of claim 14 and further including:
2 a first set of vocoders coupled to the first router;
a first set of base transceiver systems coupled to the first router;

4 a second set of vocoders coupled to the second router; and
a second set of base transceiver systems coupled to the second router.

17. A method for a soft hand-off of a radiotelephone call from a source
2 cellular system to a target cellular system, the source cellular system
comprising a source mobile switching center and a source vocoder and the
4 target cellular system comprising a target mobile switching center and a
target vocoder, both the source and target mobile switching centers coupled
6 to a public switched telephone network, the source and target vocoders each
comprising a selector, the method comprising the steps of:
8 coupling the source vocoder and the target vocoder;
the radiotelephone transmitting, to the source vocoder, a signal that
10 indicates a desire to add the target cell;
the source vocoder controlling the radiotelephone call;
12 the target cellular system allocating a selector;
the target cellular system allocating a radio; and
14 the source vocoder instructing the radiotelephone to add the target
cell.

18. The method of claim 17 and further including the step of the
2 radiotelephone indicating, to the source vocoder, the completion of the hand-
off.

19. The method of claim 17 and further including the step of the
2 target cellular system indicating to the source cell system the successful
allocation of the selector and the radio.

20. A method for handing off a radiotelephone call from a source
2 cellular system to a target cellular system, the source cellular system
comprising a source mobile switching center, a source vocoder, and a source
4 base transceiver, the target cellular system comprising a target mobile
switching center, a target vocoder, and a target base transceiver, the target

6 and source mobile switching centers each having public switched telephone
network trunks, the method comprising the steps of:

8 performing a hand-off from the source base transceiver to the target
base transceiver; and

10 switching from the source vocoder as controlling vocoder to the target
vocoder as the controlling vocoder.

21. The method of claim 20 wherein the step of performing the hand-
2 off further includes the steps of:

the radiotelephone transmitting a message to the source vocoder

4 indicating a desire to add the target base transceiver;

the source vocoder transmitting a first hand-off direction message to
6 the radiotelephone; and

the radiotelephone transmitting a first hand-off completion message
8 to the source vocoder.

22. The method of claim 20 wherein the step of switching further
2 includes the steps of:

the source vocoder transmitting a vocoder switch request to the target
4 vocoder;

the target vocoder transmitting a vocoder switch message to the
6 target base transceiver; and

the target base transceiver acknowledging, to the target vocoder, the
8 vocoder switch message; and

the target vocoder acknowledging the switch to the source vocoder.

23. The method of claim 20 and further including the steps of:

2 the target vocoder transmitting a second hand-off direction message
to the radiotelephone;

4 the radiotelephone transmitting a second hand-off completion
message to the target vocoder;

6 the target vocoder indicating to the target mobile switching center
that the target vocoder is the controlling vocoder;

8 the target mobile switching center directing the source mobile
switching center to switch its public switched telephone network trunk to an
10 allocated voice trunk;

the source mobile switching center switching its public switched
12 telephone network trunk to the allocated voice trunk; and

the source mobile switching center indicating to the source vocoder
14 that the public switched telephone network trunk has been switched to the
allocated voice trunk.

24. A method for handing off a radiotelephone call from a source
2 cellular system to a target cellular system, the source cellular system
comprising a source mobile switching center, a source vocoder, a source
4 router, and a source base transceiver, the target cellular system comprising
a target mobile switching center, a target vocoder, a target router, and a
6 target base transceiver, the target and source mobile switching centers each
having public switched telephone network trunks, the method comprising
8 the steps of:

providing a link between the source router and the target router;
10 performing a soft hand-off of the radiotelephone between the source
cellular system and the target cellular system; and
12 performing a hard hand-off of the radiotelephone between the source
cellular system and the target cellular system.

25. The method of claim 24 wherein the step of performing the hard
2 hand-off further includes the steps of:

allocating the target vocoder;
4 allocating a radio resource in the target base transceiver;
the target MSC allocating a voice trunk; and
6 directing the radiotelephone to tune to the radio resource.

26. The method of claim 25 and further including the steps of:
2 the target vocoder indicating that it is in control of the radiotelephone
call; and

- 4 the source mobile switching center switching its public switched telephone network trunk to the allocated voice trunk.

1/5

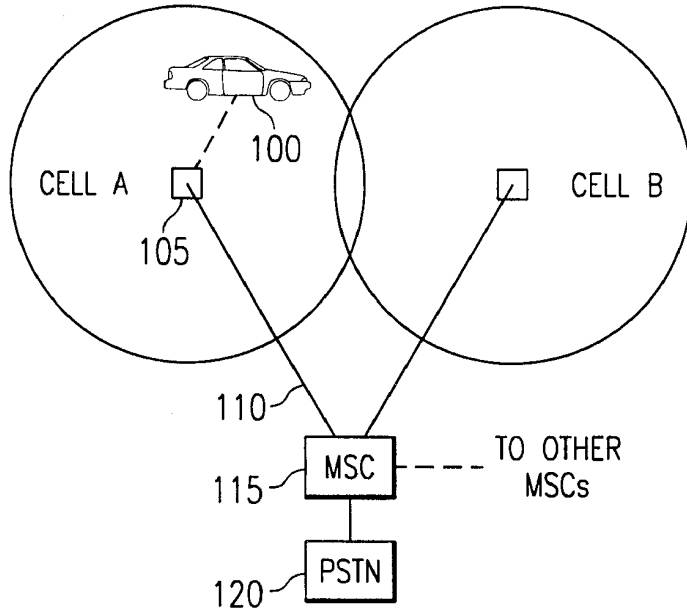


FIG. 1
(PRIOR ART)

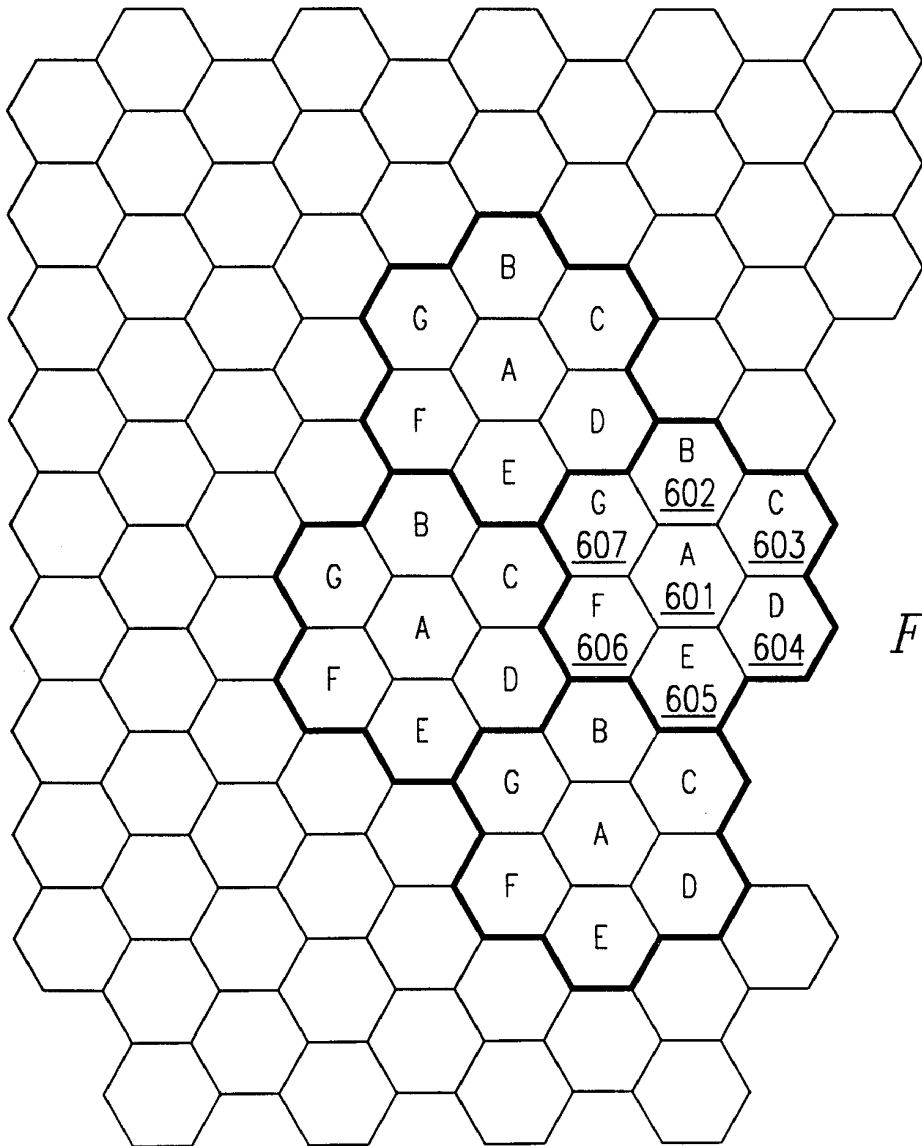


FIG. 6

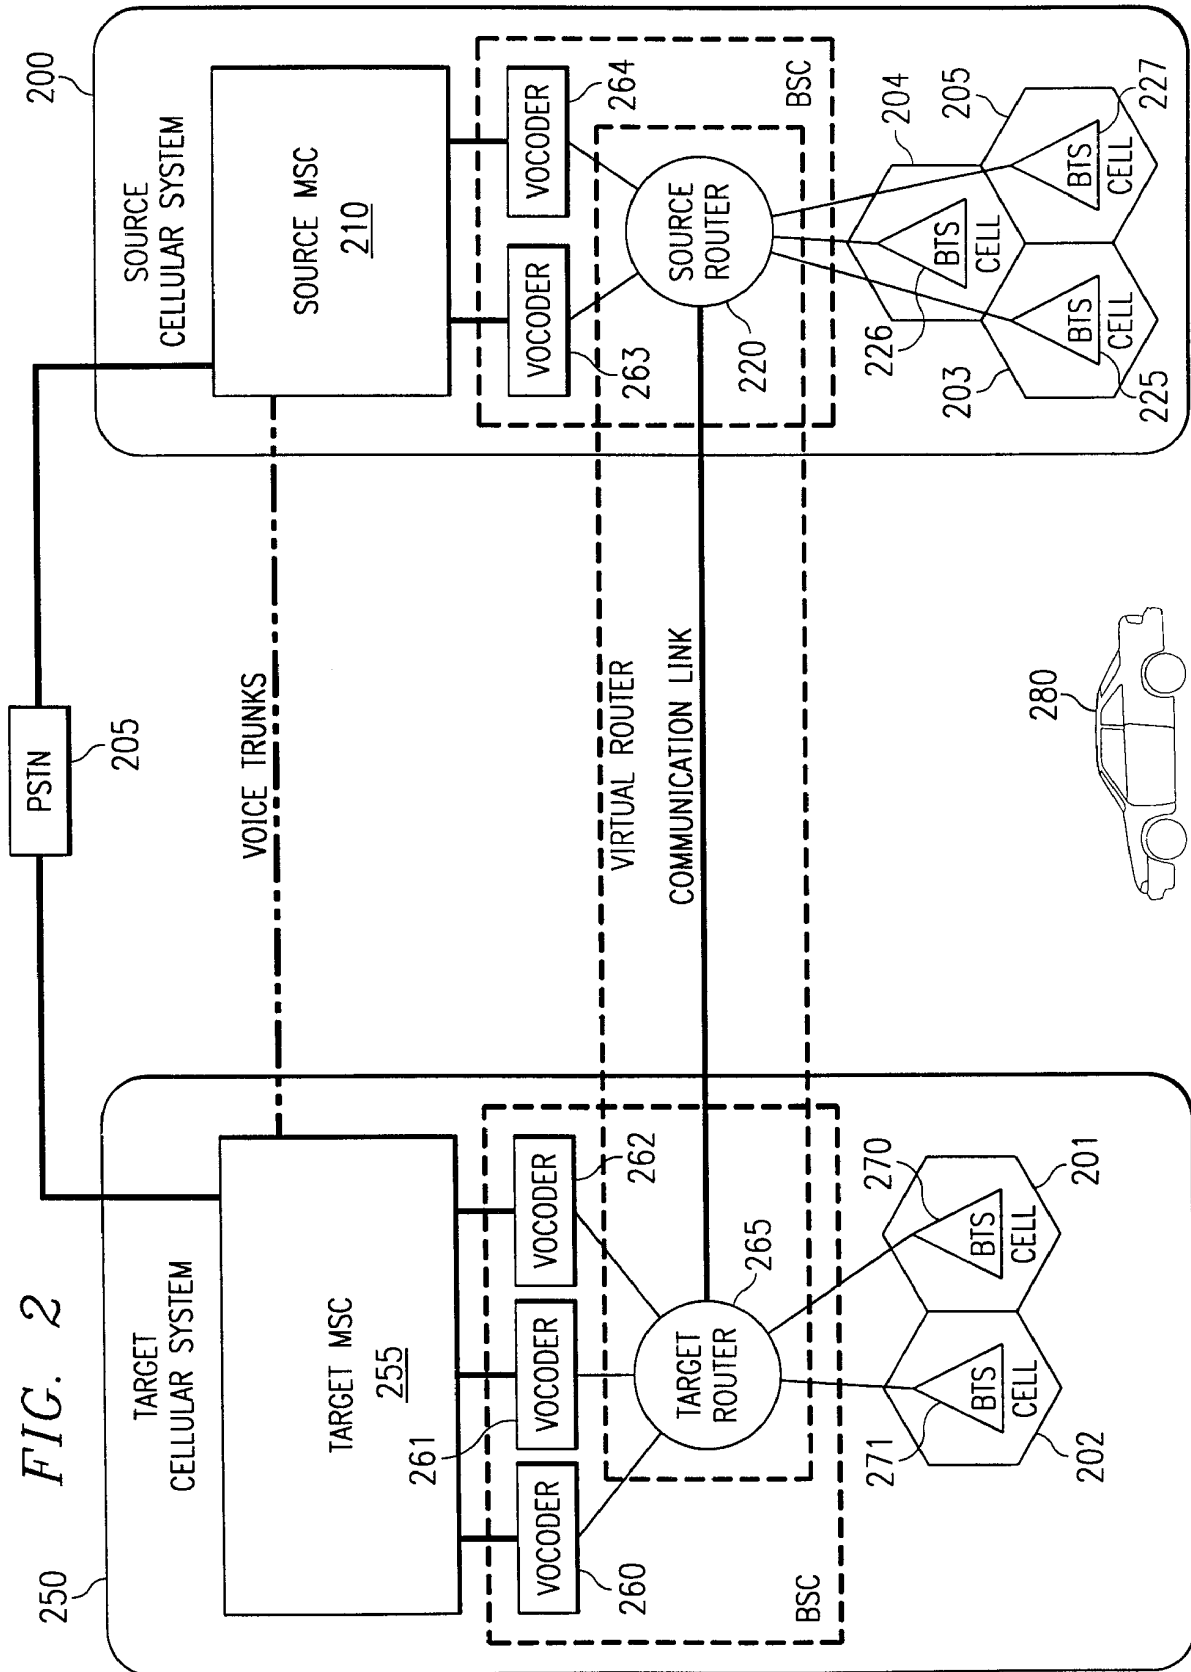


FIG. 2

FIG. 3 3/5

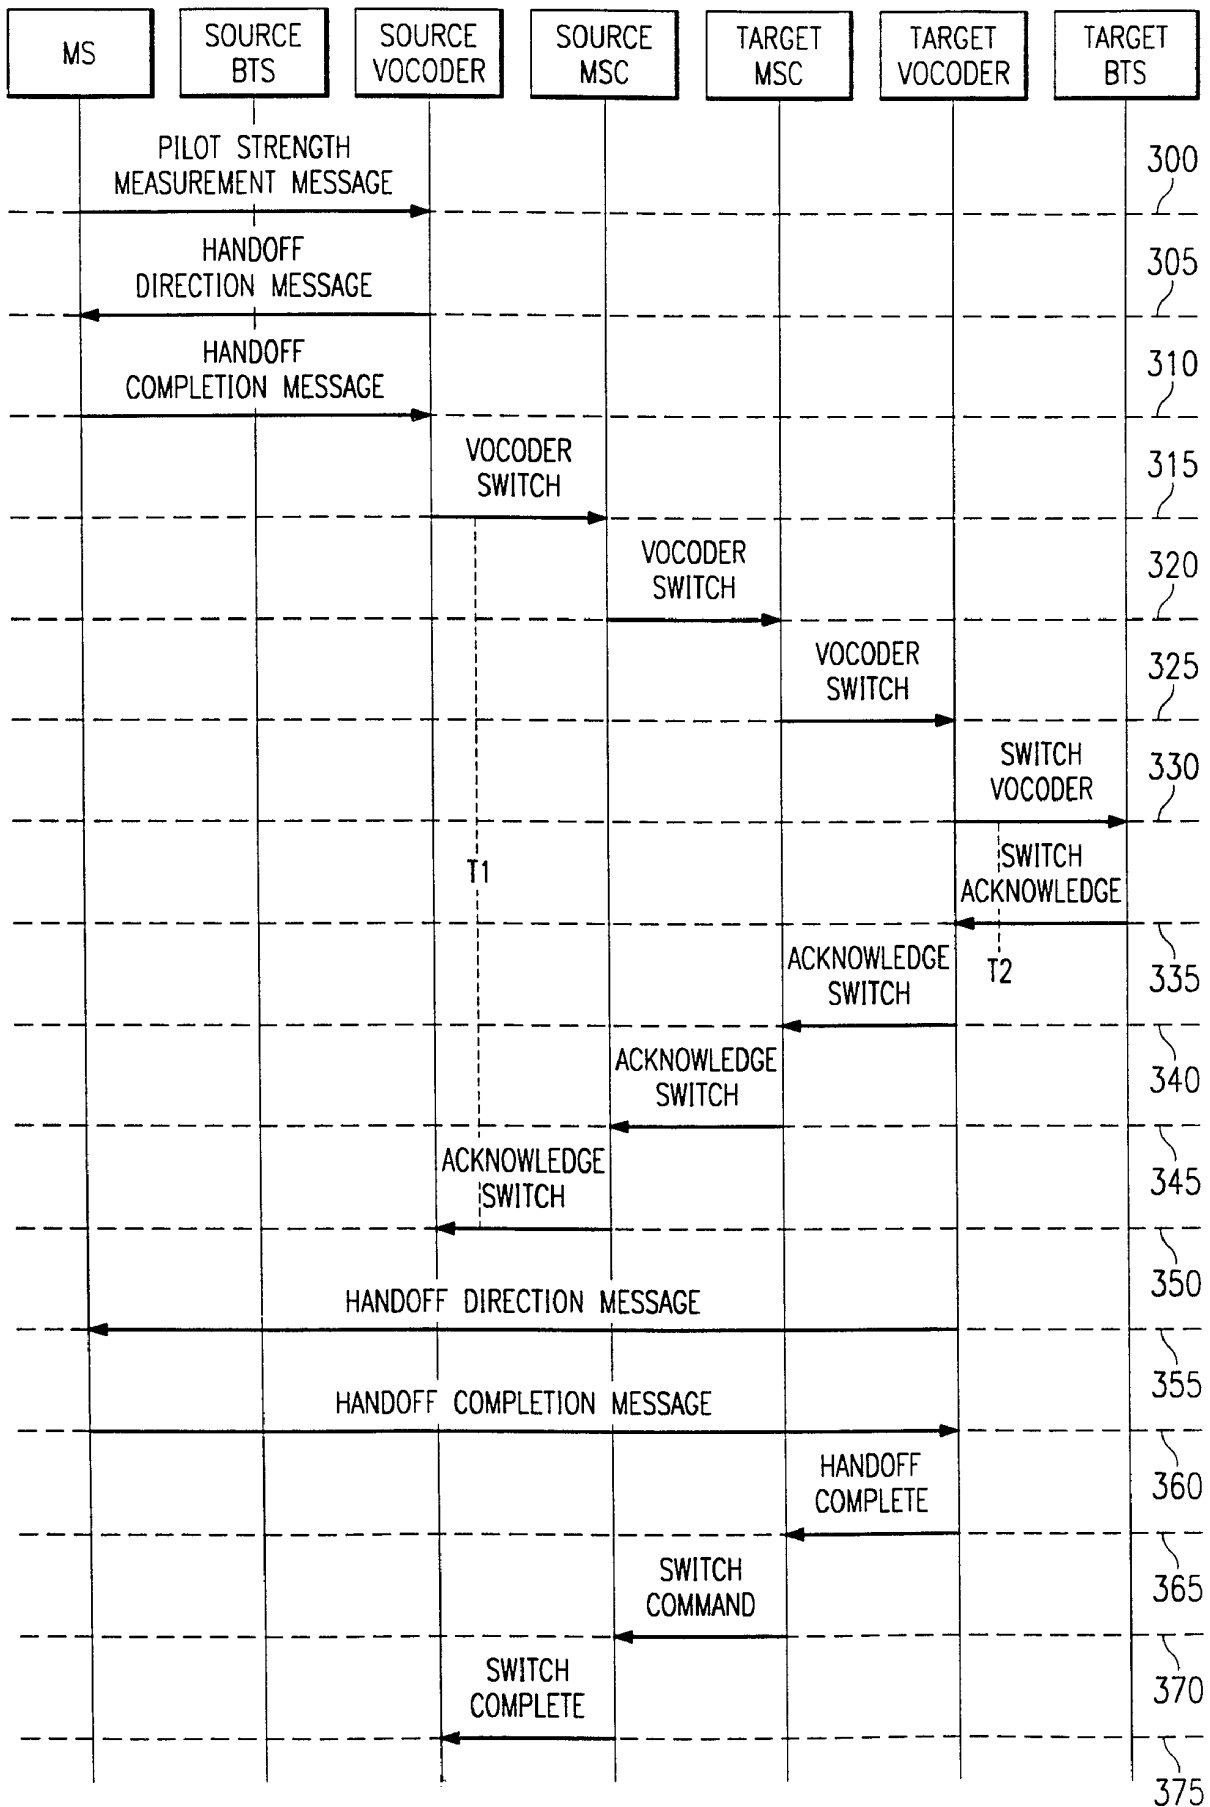


FIG. 4 4/5

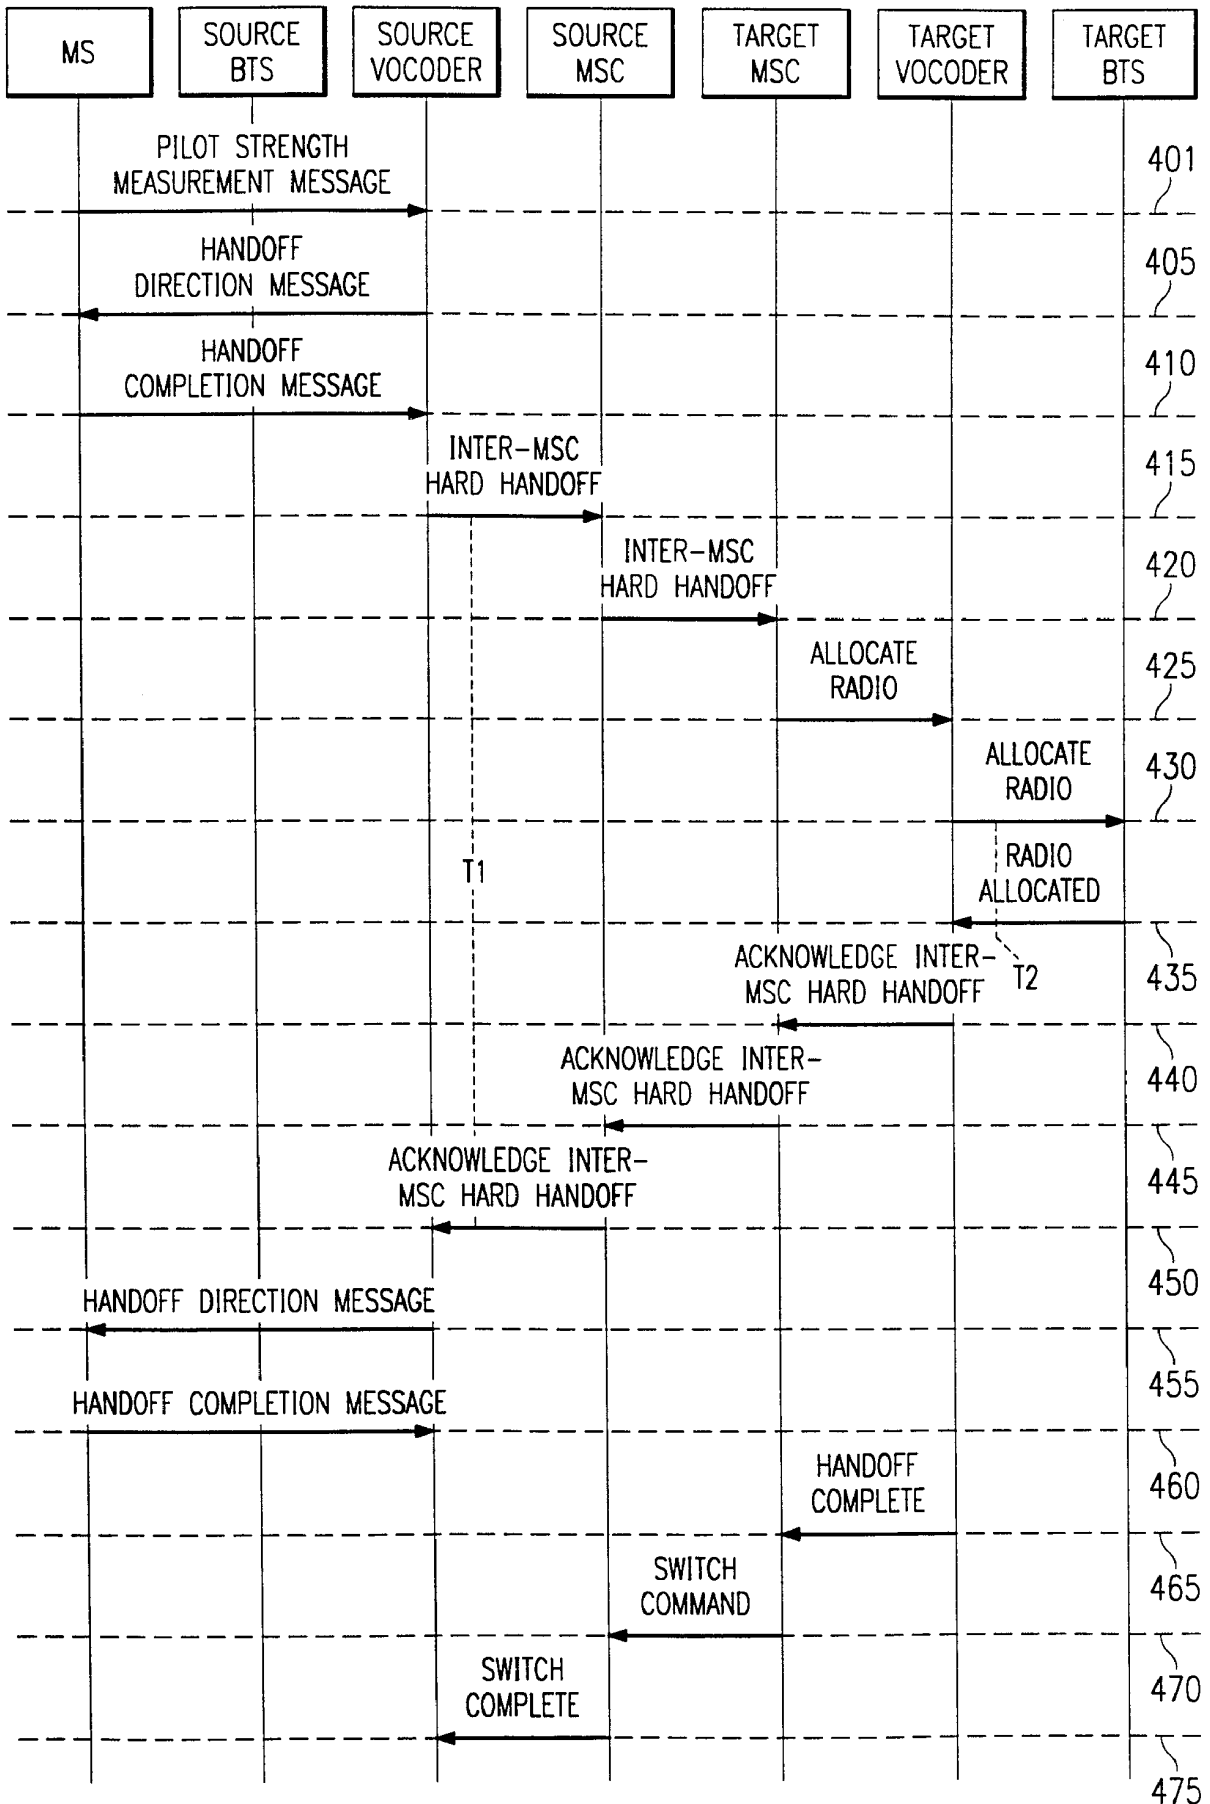


FIG. 5 5/5

