



(12) **United States Patent**
Harrabi

(10) **Patent No.:** **US 10,388,696 B2**
(45) **Date of Patent:** ***Aug. 20, 2019**

(54) **PHOTON DETECTION DEVICE WITH
SUPERCONDUCTING NANOWIRE ARRAY**

(71) Applicant: **King Fahd University of Petroleum
and Minerals**, Dhahran (SA)

(72) Inventor: **Khalil Harrabi**, Dhahran (SA)

(73) Assignee: **King Fahd University of Petroleum
and Minerals**, Dhahran (SA)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 0 days.

This patent is subject to a terminal dis-
claimer.

(21) Appl. No.: **16/361,044**

(22) Filed: **Mar. 21, 2019**

(65) **Prior Publication Data**

US 2019/0221606 A1 Jul. 18, 2019

Related U.S. Application Data

(63) Continuation of application No. 15/898,354, filed on
Feb. 16, 2018.

(Continued)

(51) **Int. Cl.**

H01L 27/18 (2006.01)

H01L 39/22 (2006.01)

(Continued)

(52) **U.S. Cl.**

CPC **H01L 27/18** (2013.01); **H01L 31/035227**
(2013.01); **H01L 31/112** (2013.01);

(Continued)

(58) **Field of Classification Search**

CPC **H01L 27/18**; **H01L 31/035227**; **H01L**
31/112; **H01L 39/08**; **H01L 39/10**; **H01L**
39/228; **G01J 2001/442**

(Continued)

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,812,464 B1 11/2004 Sobolewski et al.

2004/0016883 A1 1/2004 Polonsky et al.

(Continued)

FOREIGN PATENT DOCUMENTS

CN 102353464 B 11/2012

OTHER PUBLICATIONS

“Nanowire Single-Photon Detector Arrays”, Massachusetts Institute
of Technology Lincoln Laboratory : Lab Notes, Oct. 2012, pp. 1-4,
[https://www.ll.mit.edu/publications/labnotes/nanowirephotondetector.](https://www.ll.mit.edu/publications/labnotes/nanowirephotondetector.html)
html.

(Continued)


Primary Examiner — Tong-Ho Kim

(74) *Attorney, Agent, or Firm* — Oblon, McClelland,
Maier & Neustadt, L.L.P.

(57) **ABSTRACT**

A multiple arrayed parallel nanowire device includes one or
more arrays connected in series, wherein each array includes
a plurality of narrow nanowires flanked by one or more wide
nanowires, a top electrode, an applied current, a bottom
ground electrode, and one or more lateral electrodes where
one or more currents or one or more probing voltages can be
applied to detect voltage changes in each array. The device
detects single and multiple photons without destroying
superconductivity in all the nanowires in the array and is
thus capable of remaining sensitive to subsequent photon
impacts. Moreover, the device can resolve the location of
each photon impact.

5 Claims, 6 Drawing Sheets

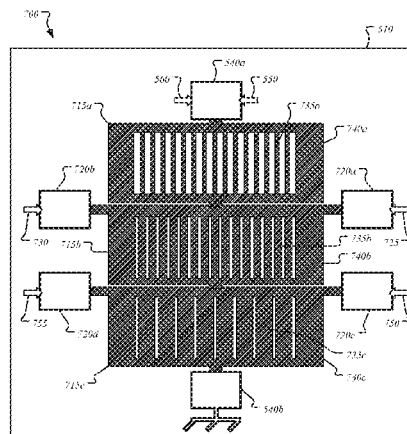

Related U.S. Application Data

- (60) Provisional application No. 62/542,579, filed on Aug. 8, 2017.
- (51) **Int. Cl.**
H01L 39/08 (2006.01)
H01L 39/10 (2006.01)
H01L 31/112 (2006.01)
H01L 31/0352 (2006.01)
G01J 1/44 (2006.01)
- (52) **U.S. Cl.**
 CPC *H01L 39/08* (2013.01); *H01L 39/10* (2013.01); *H01L 39/228* (2013.01); *G01J 2001/442* (2013.01)
- (58) **Field of Classification Search**
 USPC 257/72
 See application file for complete search history.

(56) References Cited**U.S. PATENT DOCUMENTS**

2014/0299751	A1	10/2014	Tang et al.	
2016/0003672	A1*	1/2016	Nam	G01J 1/44 250/208.2
2017/0186933	A1	6/2017	Sunter et al.	
2018/0211158	A1	7/2018	Shainline	

OTHER PUBLICATIONS

Mikkei Ejrnaes, "Increasing the area coverage of superconducting nanowire single-photon detectors", SPIE, 2011, pp. 1-2, <http://spie.org/newsroom/3674-increasing-the-area-coverage-of-superconducting-nanowire-single-photon-detectors>.

M. Ejrnaes, et al., "Timing jitter of cascade switch superconducting nanowire single photon detectors", Applied Physics Letters, vol. 95, 2009, pp. 1-3.

M.D. Eisaman, et al., "Invited Review Article: Single-photon sources and detectors", Review of Scientific Instruments, vol. 82, No. 071101, 2011, pp. 1-25.

M. Ejrnaes, et al., "A cascade switching superconducting single photon detector", Applied Physics Letters, vol. 91, No. 262509, 2007, pp. 1-3.

F.-R. Ladan, et al., "Current-Temperature Diagram of Resistive States in Long Superconducting Niobium Filaments", J Low Temp Phys, vol. 153, 2003, pp. 103-122.

K. Harrabi, et al., "Characterization of the current-induced resistive spots in superconducting YBa₂Cu₃O₇ strips", Applied Physics A, vol. 117, No. 4, 2014, pp. 2033-2036.

K. Harrabi, "Hotspot Temperatures Reached in Current-Driven Superconducting Niobium Filaments", J Supercond Nov Magn, vol. 26, Jan. 9, 2013, pp. 1865-1868.

Khalil Harrabi, "Temperature Elevation of Current-Driven Phase-Slip Centers in YBa₂Cu₃O₇ Strips", J Supercond Nov Magn, vol. 28, 2015, pp. 573-577.

K. Harrabi, "Temperature Dependence of the Heat Escape Time Deduced From the Nucleation of a Dissipative Zone in Superconducting YBa₂Cu₃O₇ Filament", IEE E Transactions on Applied Superconductivity, vol. 26, No. 3, Apr. 2016, pp. 1-3.

K. Harrabi, "Resistive states created in superconducting NbTiN filaments by an electrical current pulse", AIP Advances, vol. 5, No. 037102, 2015, pp. 1-6.

K. Harrabi, et al., "Phonon Escape Time Deduced From the Time of Nucleation of Hot Spots in Superconducting Niobium Filaments", IEEE Transaction on Applied Superconductivity, vol. 26, No. 3, Apr. 2016, pp. 1-4.

* cited by examiner

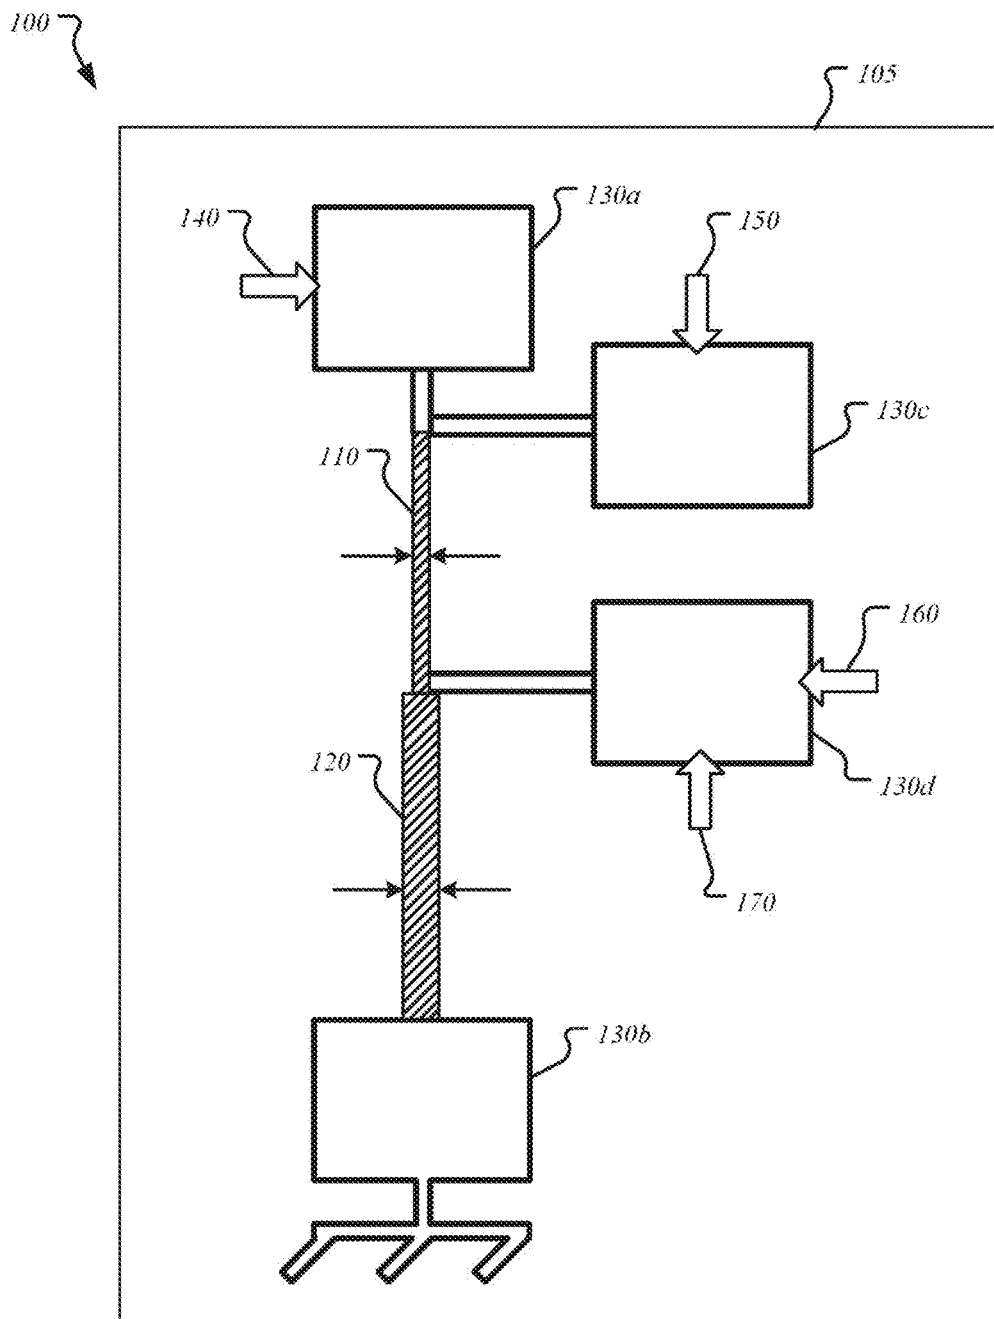
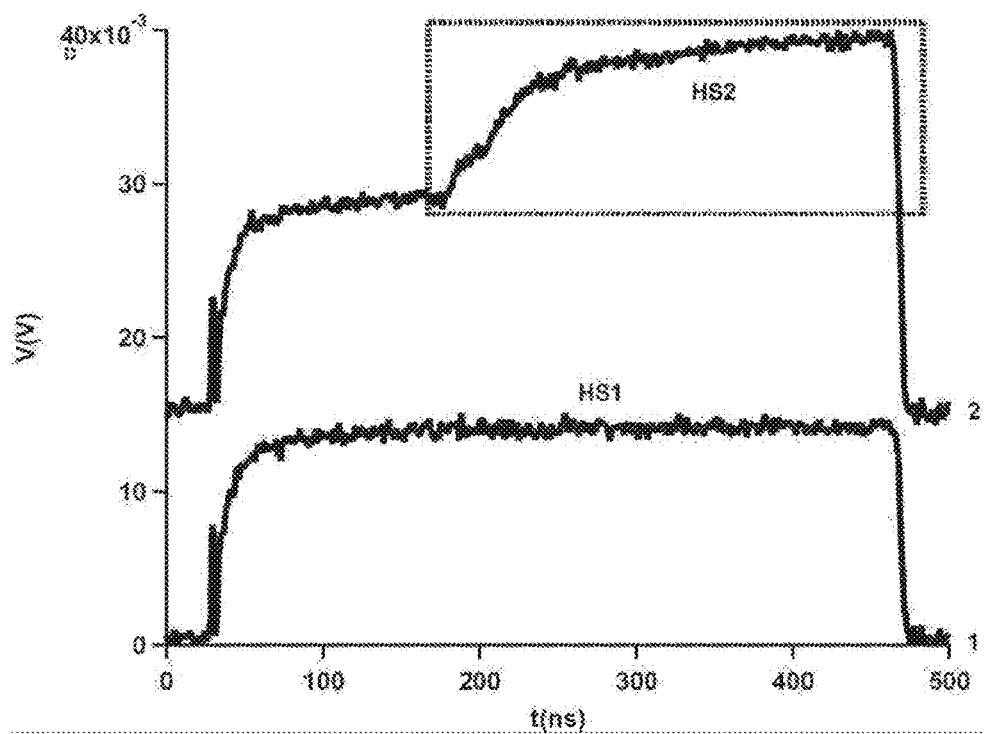


FIG. 1A

*FIG. 1B*

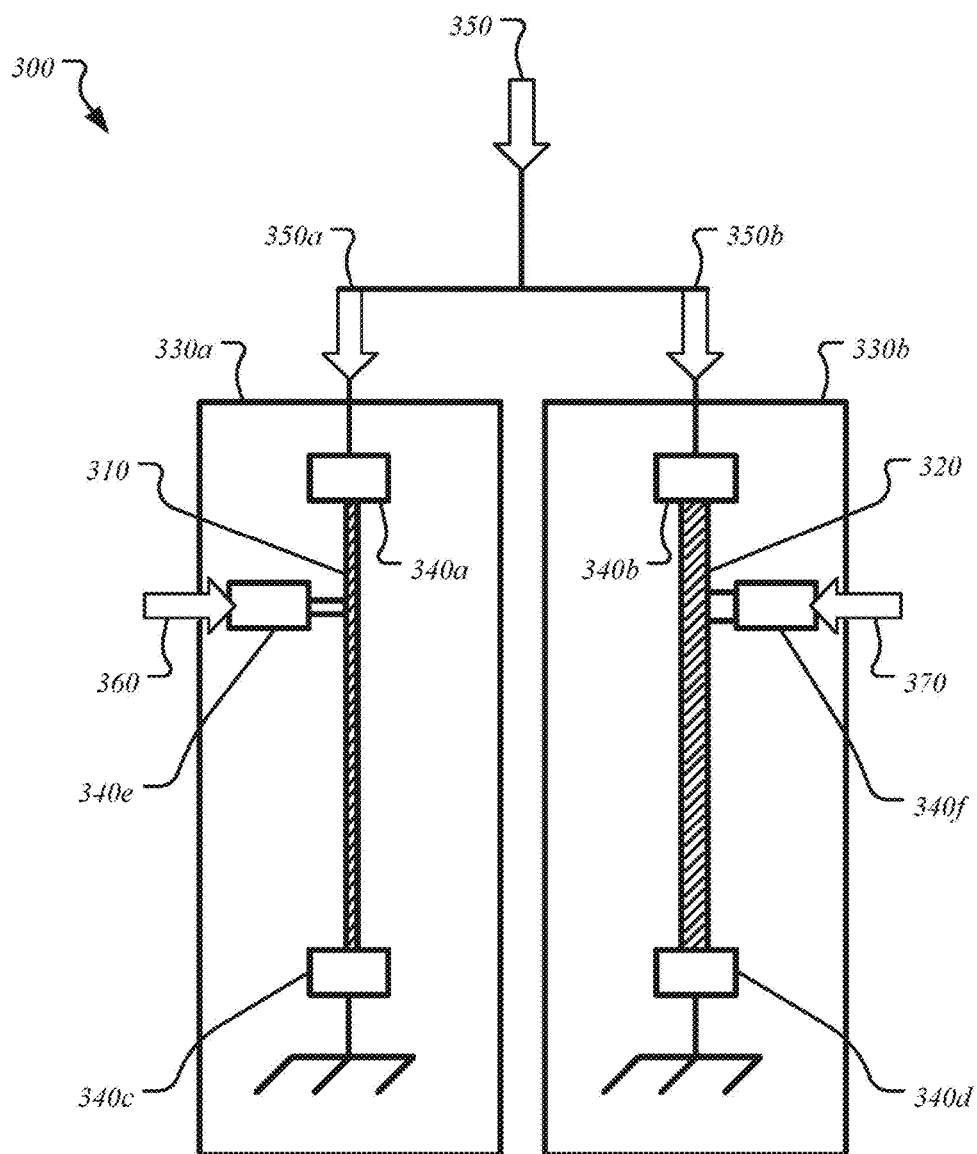
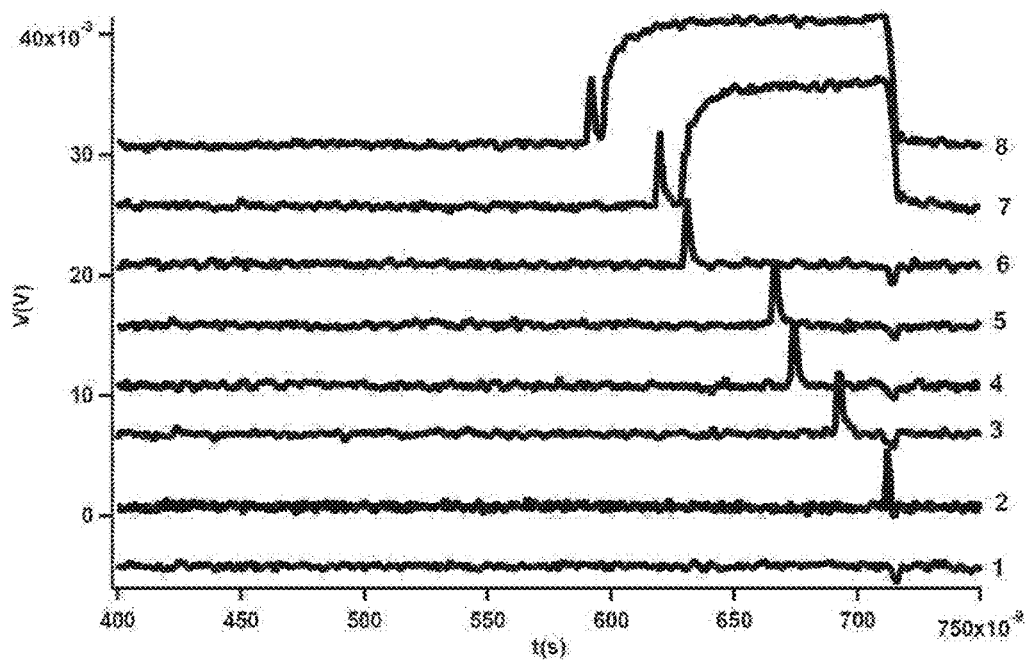


FIG. 2A

*FIG. 2B*

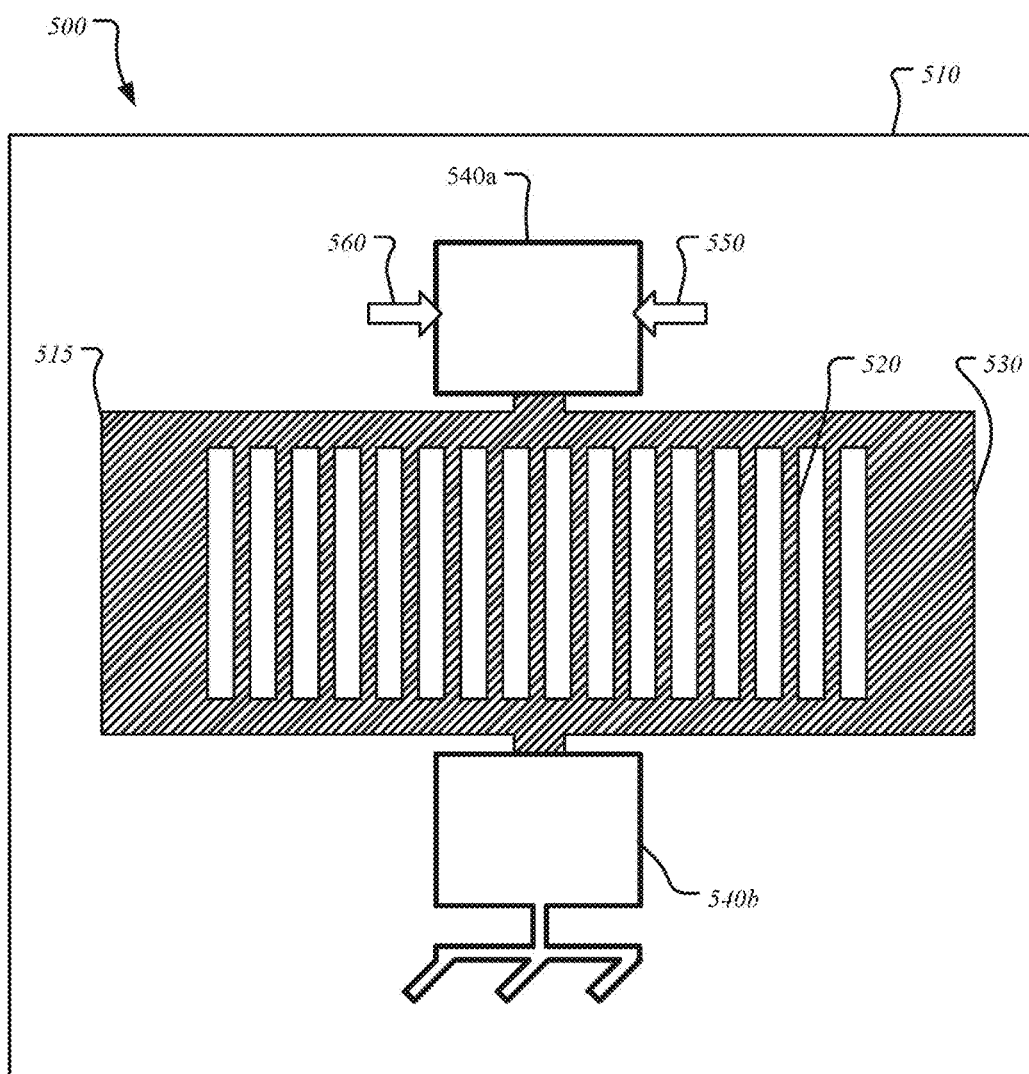


FIG. 3

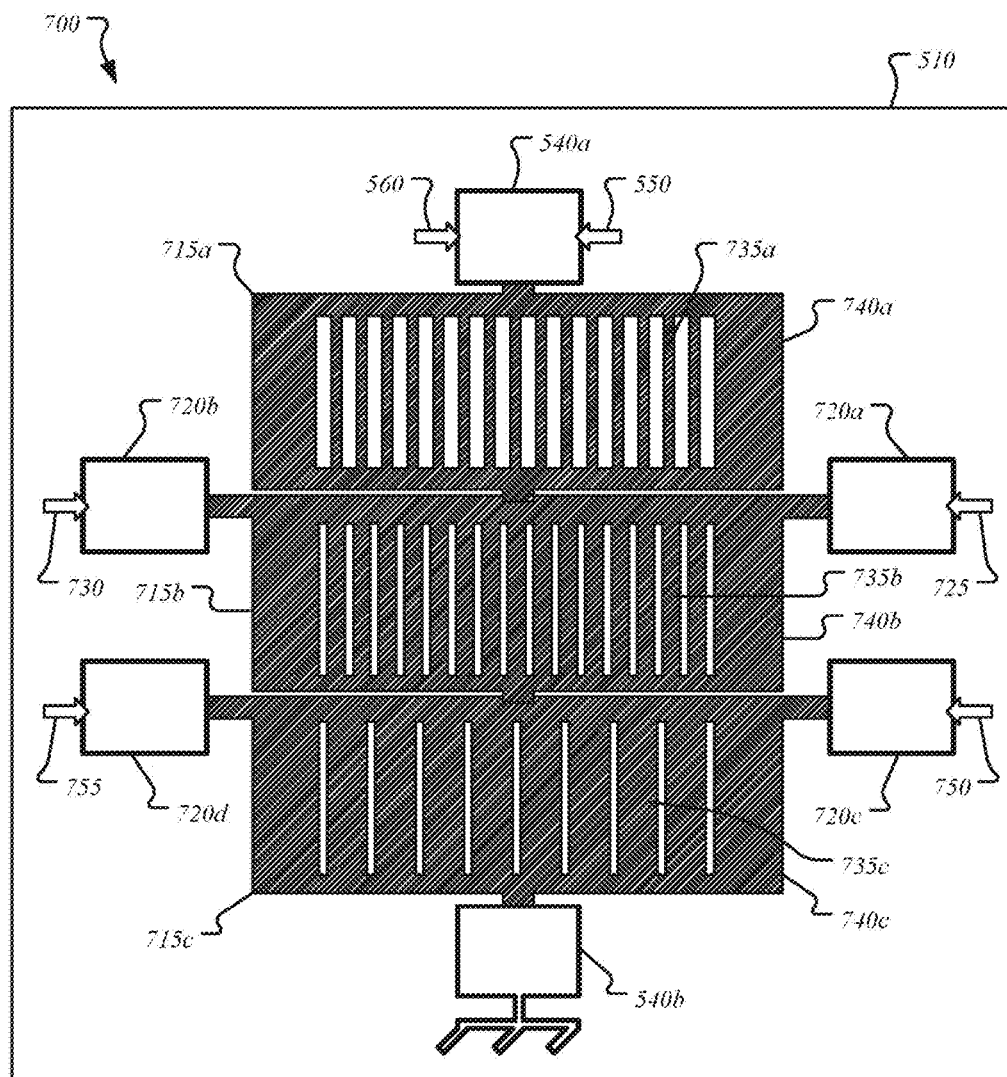


FIG. 4

1

**PHOTON DETECTION DEVICE WITH
SUPERCONDUCTING NANOWIRE ARRAY****CROSS-REFERENCE TO RELATED
APPLICATIONS**

The present application is a Continuation of Ser. No. 15/898,354, now allowed, having a filing date of Feb. 16, 2018 which claims priority to U.S. provisional application No. 62/542,579 having a filing date of Aug. 8, 2017 which is incorporated herein by reference in its entirety.

BACKGROUND**Field of the Disclosure**

The present disclosure relates to single photon detection. Notably, single photon detection that resolves the spatial location of multiple photon impacts, reduces the kinetic inductance of a single photon detector device, and reduces the reset time of the detector device.

Description of the Related Art

Over the past decade, the superconducting nanowire single photon detector (SNSPD) has attracted increasing research focus due to many advantageous features for photon detection, such as sensitivity, speed, rejection of stray signals, and potential use in quantum computing. See Eisaman et al Rev. Sci. Instrum. 82(7), 071101 (2011), incorporated herein by reference in its entirety. For example, in optical quantum information technologies, individual quantum particles, such as photons, are used to encode and manipulate information.

In general, a photodetector is a device that generates an electrical signal upon absorption of light. For many nanowire-based photon detectors, one or a plurality of ultrathin and narrow nanowires are oriented on a substrate to receive incident light (photons). A superconducting nanowire single photon detector (SNSPD) is a quantum detector capable of discerning one incident photon at a time. A SNSPD can detect single photons in the visible and infrared wavelength regimes and detect these particles with a fast reset time and high efficiency over this broad spectroscopic range. See Goltsman G N, et al Appl. Phys. Lett. 79 7057 (2001); Tang H et al US20140299751A1, each incorporated herein by reference in their entirety. However, upon photon absorption, the hotspot generated by the photon renders the SNSPD unable to register additional photon impacts until it has returned to its cooled, superconducting state. See M. Ejrnaes, et al, App. Phys. Lett 95, 132503 (2009), incorporated herein by reference in its entirety.

An equilibrium state is attained by the following relaxation process: (i) electron-electron interaction and electron-phonon interaction cause inelastic scattering of quasi-particles, (ii) quasi-particles are generated by phonons, (iii) recombination of quasi-particles and (iv) generated heat escapes to the substrate by the phonon in the superconductor.

Conventional single photon detectors use a meander wire with a large kinetic inductance, which affects the reset time of the detector and could be reduced by using parallel nanowires. See M. Ejrnaes, et al Appl. Phys. Lett. 91, 262509 (2007); and C. M. Natarajan, M. G. Tanner, R. H. Hadfield, Supercond. Sci. Technol. 25, 063001 (2012), each incorporated herein by reference in their entirety.

Single photon detector fabricated by Ejrnaes et al, discusses the time jitter in parallel superconducting NbN

2

nanowire on cascade. In addition, Ejrnaes investigated the reduction of the inductance of the nanowires.

Thus, low kinetic inductance and spatial resolution of multiple photon impacts is a desirable capability for a single SNSPD device system.

SUMMARY

Accordingly, one object of the present disclosure is to provide a single SNSPD system which overcomes the above-mentioned limitations of reset time, kinetic inductance, and spatial resolution of single and multiple photons.

In one non-limiting illustrative example, an arrayed parallel nanowire device includes an array of a plurality of narrow nanowires flanked by one or more wide nanowires, a top electrode, an applied current, an applied probing voltage, and a bottom ground electrode, where the device can be cooled below the critical temperature of the nanowire material in order to render the nanowires superconducting. Upon photon impact, a probing voltage registers a voltage change through the array, and, advantageously, the photon impact does not destroy superconductivity in the array since excess current through the impacted nanowire is redistributed to the remaining nanowires in parallel, especially the wide nanowires. This allows the array to remain sensitive to subsequent photon impacts.

In one non-limiting illustrative example, a multiple arrayed parallel nanowire device includes one or more arrays of a plurality of narrow nanowires flanked by one or more wide nanowires, a top electrode, an applied current, a bottom ground electrode, and one or more lateral electrodes where one or more currents or one or more probing voltages can be applied to detect voltage changes in each array. The device can be cooled below the critical temperature of the nanowire material in order to render the nanowires superconducting. Upon photon impact, a probing voltage applied to an associated electrode can register a voltage change through the associated array, and, advantageously, the photon impact does not destroy superconductivity in the array since excess current through the impacted nanowire is redistributed to the remaining nanowires in parallel, especially the wide nanowires. This allows the array to remain sensitive to subsequent photon impacts. Moreover, the multiple arrays can discern the impact location of the photon based on the affected array.

BRIEF DESCRIPTION OF THE DRAWINGS

A more complete appreciation of the disclosed embodiments and many of the attendant advantages thereof will be readily obtained as the same becomes better understood by reference to the following detailed description when considered in connection with the accompanying drawings, wherein:

FIG. 1A is a diagram of a single photon detecting device where two superconducting nanowires in series can detect multiple photon impacts.

FIG. 1B is a graph consisting of traces for the device in FIG. 1A that measures the voltage drop via probing voltages and shows a normal spot formation in one then both of the nanowires.

FIG. 2A is a diagram of a single photon detecting device where two superconducting nanowires in parallel demonstrate current rebalancing upon normal spot formation in one of the nanowires.

3

FIG. 2B is a graph consisting of traces for the device in FIG. 2A upon increasing current through one of the nanowires until a normal spot is formed.

FIG. 3 is a diagram of a single arrayed parallel nanowire device for photon detection, according to certain aspects of the disclosure.

FIG. 4 is a diagram of a multiple arrayed parallel nanowire device for photon detection, according to certain aspects of the disclosure.

DETAILED DESCRIPTION

All publications, patent applications, patents, and other references mentioned herein are incorporated by reference in their entirety. Further, the materials, methods, and examples discussed herein are illustrative only and are not intended to be limiting.

The description set forth below in connection with the appended drawings is intended as a description of various embodiments of the disclosed subject matter and is not necessarily intended to represent the only embodiment(s). In certain instances, the description includes specific details for the purpose of providing an understanding of the disclosed embodiment(s). However, it will be apparent to those skilled in the art that the disclosed embodiment(s) may be practiced without those specific details.

It is to be understood that terms such as “left,” “right,” “top,” “bottom,” “front,” “rear,” “side,” “height,” “length,” “width,” “upper,” “lower,” “interior,” “exterior,” “inner,” “outer,” and the like that may be used herein merely describe points of reference and do not necessarily limit embodiments of the present disclosure to any particular orientation or configuration. Furthermore, terms such as “first,” “second,” “third,” etc., merely identify one of a number of portions, components, steps, operations, functions, and/or points of reference as disclosed herein, and likewise do not necessarily limit embodiments of the present disclosure to any particular configuration or orientation.

A single photon, or energy on the order of 1 electron-volt (eV), impinging on an ultrathin nanowire in the SNSPD is able to nucleate a normal spot with increased resistance. If the nanowire is sufficiently thin, such that it is narrower than the nucleated normal spot, the normal spot will launch the bias current above the critical current, which is the current at which the nanowire will no longer be superconducting, but instead, resistive. This leads to a voltage difference or voltage spike that can be registered, followed by a relaxation process. This process entails: (i) electron-electron and electron-phonon interactions causing inelastic scattering of quasi-particles, (ii) phonons generating quasi-particles, (iii) recombination of quasi-particles, and (iv) excess heat flow to the substrate via the phonons in the superconductor. This relaxation process is affected by many factors, including nanowire thickness. For example, a single, longer nanowire with a meander pattern results in a larger kinetic inductance, whereas a series of shorter parallel nanowires could reduce the reset time.

The present disclosure implements a superconducting material, where the operating temperature is set below its transition temperature (T_c), where it will be superconducting. Each wire will be biased with a current slightly below its critical current (I_{c0}), so the array containing n nanowires requires a total bias current of nI_{c01} . See Sobolewski R, et al U.S. Pat. No. 6,812,464B1 incorporated herein by reference in its entirety. When a photon is absorbed in one nanowire, the superconductivity is locally destroyed and a normal spot is created, which forces the current to flow from

4

both sides of the wire and forms a normal zone along the whole nanowire width and a voltage appears. Therefore, before it decays as a function of time, the current will be forced to be redistributed in the remaining $(n-1)$ wires, and the heat escapes from the wire toward the substrate. It is followed by a current increment for each wire and forms $(n-1)$ normal spots. In order to overcome this problem of switching the rest of the wires, a number of flanking wide nanowires, p , for example, 2, 3, 4, or any whole number, can be inserted in each array and connected in parallel to the rest of the narrow nanowires to absorb the rebalanced current.

A fundamental experiment was performed with two parallel single wires having different widths coupled off chip on two separate sapphire substrates. They were biased with an electrical current pulse with variable current amplitude. A voltage appeared after a certain delay time t_d which marks the destruction of the superconductivity in the narrow wire by the induced peak. The current rebalanced to the wide parallel wire and because the second wire has a larger critical current, it will not lose superconductivity upon addition of the current from the narrow wire. The resistive state is dissolved in the narrow wire over time, and the superconducting state is recovered.

The disclosed arrayed parallel nanowire device detects single and multiple photons without destroying superconductivity in all the nanowires in the array and is thus capable of remaining sensitive to subsequent photon impacts. Moreover, the arrays can resolve the location of each photon impact.

For localizing the spatial position of the absorbed photon, two other arrays can be incorporated in series with the first array. A first array requires a biasing current $I_1 \approx (n+p)I_{c01} - \delta_1 \approx I_{c1}$, where I_{c01} ($I_{c1} = nI_{c01}$) is the critical current of single wire of W_{01} , (here $p=2$) which flows through the rest of the device, including a second and third array. For the second array to be sensitive to the absorption of a second photon, the biasing current for the second array is set to be $I_2 \approx I_{c2} - I_1 - \delta_2 \approx I_{c2}$, where the critical current of the second array without including the two large lateral wires is I_{c2} ($I_{c2} = (n+p)I_{c02}$, and I_{c02} is the critical current of single wire of W_{02} , (here $p=2$). When the second photon is absorbed, a signal voltage appears and can be detected by a second probing voltage V_2 . For the third array to be sensitive to the absorption of a third photon, the biasing current for the third array is set to be $I_3 \approx I_{c3} - I_1 - I_2 - \delta_3 \approx I_{c3}$ ($I_{c3} = (n+p)I_{c03}$ and I_{c03} is the critical current of single wire of W_{03} , here $p=2$). When the third photon is absorbed, a signal voltage appears and can be detected by a third probing voltage V_3 . ($\delta_1, \delta_2, \delta_3$) is the set of small current values defining the equivalent of the energy to switch the wire.

Under this biasing condition, the disclosed device will be sensitive to simultaneous impacts of multiple photons, and the lateral probing voltages will demonstrate the appearance of voltages (V_1, V_2, V_3), which decay rapidly due the heat escape toward the substrate. Each array will be sensitive to the impacts of subsequent incident photons on different wires within each array.

The destruction of the superconductivity by an electrical current pulse in superconducting filament leads to the formation of dissipative states such as phase slip centers or hot spots. It has a similar role in case of wire biased with a current just below its critical current and subject to photon absorption. When a superconducting filament is biased by an electrical current pulse and once exceeding the critical current, a voltage appears after a certain delay time t_d . Various studies reported on different type of materials, Nb, NbTiN, YBCO. See F. R. Ladan, Kh. Harrabi, M. Rosticher,

C. Villard, P. Mathieu, and J.-P. Maneval, *J. Low Temp. Phys.* 153, 103 (2008); K. Harrabi, *AIP Advances* 5, 037102 (2015); K. Harrabi, F. Oktasendra, K. Gasmi, I. G. Berdiy-
 yorov, A. Mekki, J.-P. Maneval, *IEEE Trans. Appl. Super-
 cond.* (2016); K. Harrabi, *IEEE Trans. Appl. Supercond.*
 (2016); and K. Harrabi, A. F. Salem, K. Ziq, A. I. Mansour,
 S. Kunwar, J. P. Maneval, G. Berdiyov, *Appl. Phys. A* 117,
 20332036 (2014), each incorporated herein by reference in
 their entirety. The delay times for different applied current
 values were fitted with the time dependent Ginzburg Landau
 theory, and the heat escape time was deduced subsequently
 as τ_d . See K. Harrabi, *J. Supercond. Nov. Magn.* 26, 1865
 (2013), incorporated herein by reference in its entirety. It
 was interpreted as the time needed for the heat to escape
 from the filament to the substrate. It is an indication of the
 reset time of the photon detector to be sensitive to a second
 photon.

A multiple nanowire device **100** for photon detection
 (herein referred to as device **100**) is illustrated in FIG. 1A.
 The device **100** is cooled below the transition temperature of
 the nanowire material under vacuum. A first nanowire **110**
 is fabricated on a substrate **105**. A second nanowire **120**
 is connected in series to the first nanowire **110** on the substrate
105. The first nanowire **110** can be made of a superconduct-
 ing material, for example niobium titanium, and can have a
 width of 5 micrometers. The second nanowire **120** can be
 made of the same superconducting material and have a
 width of 20 micrometers, such that its width is much wider
 than that of the first nanowire **110** and its critical current is
 higher than that of the first nanowire **120**. The substrate **105**
 can be made of, for example, sapphire, and have dimensions
 of 1 centimeter by 1 centimeter, wherein a plurality of the
 device **100** can be fabricated on the same substrate **105**. The
 first nanowire **110** is in contact with a top electrode **130a** and
 the second nanowire **120** is in contact with a bottom elec-
 trode **130b**. The top electrode **130a** is used to bias both the
 first nanowire **110** and second nanowire **120** with a first
 current, indicated by arrow **140**. The first nanowire **110** is
 also connected to a top lateral electrode **130c**. A first probing
 voltage, indicated by arrow **150**, can be applied to the top
 lateral electrode **130c** in order to measure any voltage
 change across the first nanowire **110** and second nanowire
120. The second nanowire **120** is also connected to a bottom
 lateral electrode **130d**. A second current, indicated by arrow
160, can be applied to the bottom lateral electrode **130d** in
 order to additionally bias only the second nanowire **120**. A
 second probing voltage, indicated by arrow **170**, can be
 applied to the bottom electrode **130d** in order to measure any
 voltage change across only the second nanowire **120**.

Non-limiting examples of exemplary materials for the
 substrate are glass, sapphire, and magnesium oxide. Non-
 limiting examples of exemplary materials for the supercon-
 ducting nanowire are niobium, niobium nitride, niobium
 titanium, niobium titanium nitride, and magnesium diboride.

The device **100** can be used to spatially register photon
 impacts, as illustrated in FIG. 1B. For example, a photon
 impact on the first nanowire **110** would induce a normal spot
 formation, thereby destroying the superconductivity of the
 first nanowire **110** and increasing its resistance. This would
 result in a voltage change that can be read by the first
 probing voltage **150** applied to the top lateral electrode **130c**.
 Trace **1** in FIG. 1B demonstrates how this device registers a
 normal spot formation, for example by a photon impact or
 by increasing current through the first nanowire **110** above
 its critical current, via the voltage spike in this trace. How-
 ever, the second nanowire **120** will remain supercon-
 ducting since it is additionally biased by the second current

160. In an example where a normal spot is formed in the first
 nanowire **110** and the second nanowire **120**, two voltage
 spikes can be seen, as illustrated in trace **2**. A first voltage
 spike can be registered after a normal spot is formed, for
 example by a photon impact or increase in current above the
 nanowire's critical current at the first nanowire **110**. This is
 illustrated by a first peak in the voltage in trace **2**. Another
 voltage spike can be registered after a second normal spot is
 formed, for example by a photon impact or increase in
 current above the nanowire's critical current at the second
 nanowire **120**. This is illustrated by a second peak in the
 voltage in the same trace **2**. Therefore, device **100** and the
 results from the traces in FIG. 1B demonstrate resolution of
 one or more photon impacts at the first nanowire **110** and
 second nanowire **120**.

A parallel nanowire device **300** for photon detection
 (herein referred to as device **300**) is illustrated in FIG. 2A.
 The device **300** is cooled below the transition temperature of
 the nanowire material under vacuum. A first nanowire **310**
 and a second nanowire **320** are fabricated on substrates **330a**
 and **330b**, respectively. The first nanowire **310** and second
 nanowire **320** are mounted in parallel and the width of the
 first nanowire **310** is less than the width of the second
 nanowire **320**. The first nanowire **310** is in contact with a
 first top electrode **340a** on a top end and a first bottom
 electrode **340c** on an opposite bottom end. The second
 nanowire **320** is in contact with a second top electrode **340b**
 on a top end and a second bottom electrode **340d** on an
 opposite bottom end. The first nanowire **310** is biased with
 a first current, indicated by arrow **350a**. The second
 nanowire **320** is biased with a second current, indicated by
 arrow **350b**, where the first current **350a** and second current
350b can be different in value depending on the nanowire
 properties. The first nanowire **310** can be connected to a first
 lateral electrode **340e** where a first probing voltage **360** can
 be applied to measure any voltage change across the first
 nanowire **310**. The second nanowire **320** can be connected
 to a second lateral electrode **340f** where a second probing
 voltage **370** can be applied to measure any voltage change
 across the second nanowire **320**.

Non-limiting examples of exemplary materials for the
 substrate are glass, sapphire, and magnesium oxide. Non-
 limiting examples of exemplary materials for the supercon-
 ducting nanowire are niobium, niobium nitride, niobium
 titanium, niobium titanium nitride, and magnesium diboride.

The parallel nanowire device demonstrates how current in
 the device can be rebalanced from the thinner first nanowire
310 into the wider second nanowire **320**. For example, upon
 photon impact on the first nanowire **310**, a normal spot
 forms in the first nanowire **310**. This destroys the supercon-
 ductivity of the first nanowire **310** and increases its resis-
 tance, thereby causing the first current **350a** to be rebalanced
 into the second nanowire **320**. If the second current **350b**
 flowing to the second nanowire **320** is sufficiently lower than
 its critical current, the addition of the first current **350a** will
 not destroy the superconductivity of the second nanowire
320. After the superconductivity of the first nanowire **350a**
 is restored via the relaxation process, it will return to its
 original state and regain sensitivity to photon impacts.

The graph in FIG. 2b illustrates the signal output of
 parallel nanowire device **300**. For example, at rest, the
 probing voltage **360** does not register any signals, which is
 seen in curve 1. Upon an increase in a total current, indicated
 by arrow **350**, and thus an increase in the first current **350a**,
 the current exceeds the critical current and a voltage is
 registered by probing voltage **360**. This registered signal is
 seen as the peak in curves 2-6. Following this increase in the

first current **350a** and a subsequent output signal due to the formation of a normal spot, the first current **350a** is balanced into the second nanowire **320** where the second current **350b** is set below the critical current. If the second current **350b** is set close to the critical current and the rebalanced first current **350a** from the first nanowire **310** causes the total current flowing through the second nanowire **320** to exceed the critical current, curves 7 and 8 illustrate how a first peak will be exhibited from the first induced normal spot in the first nanowire **310** followed by a second extended peak from the second induced normal spot in the second nanowire **320**. Therefore, the second applied current **350b** to the second nanowire **320** should be sufficiently below the critical current in order for it to accept rebalanced current from induced normal spots from the first nanowire **310**.

In one embodiment, an arrayed parallel nanowire device **500** (herein referred to as device **500**) can be used for photon detection as illustrated in FIG. 3. This design draws on the advantages of device **100** and device **300** and marries them into an arrayed structure. A nanowire array **515** can include one or more narrow nanowires **520** connected in parallel. The nanowire array **515** can also include one or more wide nanowires **530** connected in parallel. The one or more narrow nanowires **520** can be disposed between the wide nanowires **530**, where they are all connected in parallel. The device also includes a substrate **510**, a top electrode **540a**, a bottom electrode **540b**, an applied current indicated by arrow **550**, and a probing voltage indicated by arrow **560**.

The narrow nanowires **520** can have lateral widths varying between, for example, 10 nanometers to 500 nanometers, or preferably, 100 nanometers to 300 nanometers. The wide nanowires **530** can have lateral widths varying between, for example, 500 nanometers to 100 micrometers, or preferably, 0.5 micrometers to 10 micrometers. The thickness of the narrow nanowires **520** and wide nanowires **530** can vary between, for example, 0.5 nanometers to 50 nanometers, or preferably, 5 nanometers to 10 nanometers. The narrow nanowires **520** in the nanowire arrays **515** can be of a uniform width or thickness in each array or be of varying widths or thicknesses in each array.

Non-limiting examples of exemplary materials for the substrate are glass, sapphire, and magnesium oxide. Non-limiting examples of exemplary materials for the superconducting nanowire are niobium, niobium nitride, niobium titanium, niobium titanium nitride, and magnesium diboride.

In an exemplary embodiment, a multiple arrayed parallel nanowire device **700** (herein referred to as device **700**) can be used for multiple photon detection and spatial resolution of photon impacts. As illustrated in FIG. 4, the device adopts the nanowire array **515** design from FIG. 3. A first nanowire array **715a** includes one or more narrow nanowires **735a** connected in parallel. The first nanowire array **715a** can also include one or more wide nanowires **740a** connected in parallel. The one or more narrow nanowires **735a** can also be disposed between the wide nanowires **740a**, where they are all connected in parallel. The device also includes a substrate **510**, a top electrode **540a**, a bottom electrode **540b**, a first applied current indicated by arrow **550**, and a first probing voltage indicated by arrow **560**. Additional arrays can be connected in series to the first nanowire array **715a**. For example, a second nanowire array **715b** can be connected to a bottom side of the first nanowire array **715a**, and a third nanowire array **715c** can be connected to a bottom side of the second nanowire array **715b**. The top electrode **540a** can be connected to the first nanowire array **715a** and the bottom electrode **540b** can be connected to the third nanowire array **715c**.

A first right lateral electrode **720a** can be connected to the second nanowire array **715b** on a right side of the second nanowire array **715b**. A first left lateral electrode **720b** can be connected to the second nanowire array **715b** on a left side of the second nanowire array **715b**. A second applied current, indicated by arrow **725**, is applied to the second nanowire array **715b**, and a second probing voltage, indicated by arrow **730**, can be applied to measure any voltage change across the second nanowire array **715b**.

A second right lateral electrode **720c** can be connected to the third nanowire array **715c** on a right side of the third nanowire array **715c**. A second left lateral electrode **720d** can be connected to the third nanowire array **715c** on a left side of the third nanowire array **715c**. A third applied current, indicated by arrow **750**, is applied to the third nanowire array **715c**, and a third probing voltage, indicated by arrow **755**, can be applied to measure any voltage change across the third nanowire array **715c**. While the device as presented in this embodiment consists of 3 arrays, this design can be repeated for any number of similar nanowire arrays **515** connected in series.

The narrow nanowires **735a**, **735b**, **735c** and wide nanowires **740a**, **740b**, **740c** can have widths and thicknesses similar to those as device **500**. Further, the narrow nanowires **735a**, **735b**, **735c** in the first, second, and third nanowire arrays **715a**, **715b**, **715c** can be of a uniform width or thickness in each array or be of varying widths or thicknesses in each array. For example, the wide nanowires **740a**, **740b**, **740c** can all have a width of 10 micrometers, while the narrow nanowires **735a** in the first nanowire array **715a** can have a width of 100 nanometers, the narrow nanowires **735b** in the second nanowire array **715b** can have a width of 150 nanometers, and the narrow nanowires **735c** in the third nanowire array **715c** can have a width of 200 nanometers. The substrate **510** can be made of, for example, sapphire, and have dimensions of 1-10 centimeter by 1-10 centimeter, wherein a plurality of the device **700** can be fabricated on the same substrate **510**. The narrow nanowires **735a**, **735b**, **735c** and wide nanowires **740a**, **740b**, **740c** can be made of niobium nitride and the substrate can be made of sapphire. Further non-limiting examples of exemplary materials for the substrate are glass and magnesium oxide. Further non-limiting examples of exemplary materials for the superconducting nanowire are niobium, niobium titanium, niobium titanium nitride, and magnesium diboride.

There are many advantages to device **500** and device **700**. They can reduce kinetic inductance and the reset time of the normal spot. For example, upon photon impact somewhere in the middle of the first nanowire array **715a** and absorption by one of the narrow nanowires **735a**, a normal spot is created and superconductivity is locally destroyed in the impacted narrow nanowire **735a**. Moreover, this event can be detected by probing voltage **560** to indicate that a photon impact has occurred. This increase in resistance of the narrow nanowire **735a** leads to current redistribution into the remaining narrow nanowires **735a** in the first nanowire array **715a**. The flanking wide nanowires **740a** will help absorb a majority of the current redistribution from the narrow nanowire **735a** that absorbed the photon, preventing the remaining narrow nanowires **735a** from losing superconductivity. Thus, this capability allows the same array to remain sensitive to upcoming photon impacts. Additionally, the length of the narrow nanowires **735a** and wide nanowires **740a** can easily be adjusted during fabrication in order to increase area of coverage in a single array, such as the first nanowire array **715a**.

Area coverage can also be increased via the design of device **700**, which can detect multiple photon impacts while also spatially resolving the impact locations. For example, for an impact of a first photon on the first nanowire array **715a**, a positive voltage is detected by the first probing voltage **560**. In addition, a negative voltage is detected by the second probing voltage **730** due to the first photon impact. In the case where a second photon impact occurs on the second nanowire array **715b**, a positive voltage is detected by the second probing voltage **730**, a negative voltage is detected by the third probing voltage **755**, and an additional positive voltage is detected by the first probing voltage **560**. Therefore, both the first and second photon impacts are detected, and in a similar extension, a third photon impact could be detected by the third nanowire array **715c**. Again, since the design of nanowire arrays **735a**, **735b**, **735c** feature wide nanowires **740a**, **740b**, **740c** flanking narrow nanowires **735a**, **735b**, **735c**, none of the arrays will lose superconductivity and each array can remain sensitive to additional photon impacts immediately after registering the previous photon impact.

These advantages lead to benefits in many applications, such as quantum imaging, quantum entanglement, quantum cloning, Geiger-mode LiDAR, and low light metrology. For example, the multiple arrays in device **700** will allow for spatial resolution of each photon impact, effectively increasing “pixel” resolution. In another example, the ability to quickly count photons without requiring time to reset superconductivity allows for improved efficiency in photon scanners.

While certain embodiments have been described, these embodiments have been presented by way of example only, and are not intended to limit the scope of the present disclosures. Indeed, the novel methods, apparatuses and systems described herein can be embodied in a variety of other forms; furthermore, various omissions, substitutions and changes in the form of the methods, apparatuses and systems described herein can be made without departing from the spirit of the present disclosure. The accompanying claims and their equivalents are intended to cover such forms or modifications as would fall within the scope and spirit of the present disclosure.

What is claimed is:

1. A photon detection device having a superconducting nanowire array, comprising:
 - a substrate;
 - an array including a plurality of superconducting nanowires connected in parallel disposed on the substrate; and

a source electrode and a ground electrode connected to the array and configured to conduct a current from the source electrode through the array to the ground electrode, wherein

the array is configured to detect one or more photon impacts;

the array includes a first set of a plurality of superconducting nanowires disposed in an interior of the array and a second set of a plurality of superconducting nanowires disposed on a periphery of the array;

a width of the superconducting nanowires in the first set is narrower than a width of the superconducting nanowires in the second set; and

each of the plurality of superconducting nanowires of the first set is electrically connected in parallel to each of the plurality of superconducting nanowires of the second set,

wherein the current conducted from the source electrode through the array to the ground electrode at least partially conducts through at least one of the nanowires in the first set of the plurality of superconducting nanowires disposed in the interior of the array; and

in response to one of the superconducting nanowires in the first set of the plurality of superconducting nanowires disposed in the interior of the array losing superconductivity when impacted by the one or more photon impacts, the current is redirected at least partially into the second set of the plurality of superconducting nanowires disposed on the periphery of the array such that the one or more photon impacts is detected via a change in the current or probing voltage at each respective additional plurality of arrays.

2. The photon detection device of claim 1, wherein the first set of the plurality of superconducting nanowires has a width of approximately 100 nanometers and a thickness of approximately 5 nanometers.

3. The photon detection device of claim 1, wherein the second set of the plurality of superconducting nanowires has a width of approximately 1 micrometer and a thickness of approximately 5 nanometers.

4. The photon detection device of claim 1, wherein a material of the plurality of superconducting nanowires includes at least one of niobium, niobium nitride, niobium titanium, niobium titanium nitride, and magnesium diboride.

5. The photon detection device of claim 1, further comprising an additional plurality of arrays connected in series, wherein each one of the additional plurality of arrays is connected to one or more lateral electrodes that are configured to receive a current or probing voltage.

* * * * *