

# **King Fahd University of Petroleum & Minerals Computer Engineering Dept**

---

**COE 543 – Mobile and Wireless  
Networks**

**Term 072**

**Dr. Ashraf S. Hasan Mahmoud**

**Rm 22-148-3**

**Ext. 1724**

**Email: [ashraf@kfupm.edu.sa](mailto:ashraf@kfupm.edu.sa)**

5/20/2008

Dr. Ashraf S. Hasan Mahmoud

1

## **Lecture Contents**

---

1.

5/20/2008

Dr. Ashraf S. Hasan Mahmoud

2

## Main References

---

- K. Pahlavan and P. Krishnamurthy, A Unified Approach: Principles of Wireless Networks, Prentice Hall, 2002 – Section 6.4
- J. Wilkes, "Privacy and Authentication Needs for PCS," IEEE Personal Communications, August 1995, pp. 11-15
- J. Williams, "The IEEE802.11b Security Problem, Part 1," IT Professional, November-December 2001, pp. 91-95 (and the references therein)

## Wireless Media

---

- RF is a shared media
  - Wireless communication is more susceptible to eaves dropping
- No privacy
- The presence of the communication request does not uniquely identify the originator
- Need for Privacy and Authentication

## **None Cryptographic Means**

- Number Assigned Module (NAM) and Electronic Serial Number (ESN)
  - Used for authentication
- Using the > 900 MHz band
  - Outside the range of typical scanners
- Which is more secure FDMA, TDMA, or CDMA?
- None cryptographic methods usually do not provide the proper solution

5/20/2008

Dr. Ashraf S. Hasan Mahmoud

5

<http://www.philzimmermann.com/>

## **Levels of Privacy**

- Level 0: None – with no privacy enabled
  - Anyone with digital scanner can monitor calls
  - A "lack of privacy" indicator should be provided – a public trust issue
- Level 1: Equivalent to Wireline
  - Most people assume wireline calls are secure – eaves dropping can be detected – not as in wireless
  - Used for routine every day calls
  - Would take a year or so to break encryption – would require same effort to break every call
- Level 2: Commercially Secure
  - For proprietary info
  - Would take 10~25 yrs to break encryption – would require same effort to break every call
- Level 3: Military/Government Secure
  - None breakable?

5/20/2008

Dr. Ashraf S. Hasan Mahmoud

6

## **Privacy Requirements**

---

- Privacy of Call Setup Information
  - Calling #, calling card #, type of service, etc.
- Privacy of Speech
  - Must be encoded and none interceptable
- Privacy of Data
  - Must be encoded and none interceptable
- Privacy of User Location
  - Location should not be disclosed – encrypting user id
  - Remember HLR and VLR have this info – must not be subject to attacks

5/20/2008

Dr. Ashraf S. Hasan Mahmoud

7

## **Privacy Requirements – cont'd**

---


- Privacy of User ID
  - User ID may be encrypted
  - Prevents analysis of calling patterns for this ID – VERY IMPORTANT
- Privacy of Calling Patterns
  - No info sent from mobile should allow traffic analysis
  - This info: calling #, frequency of use, caller identity
- Financial Transactions
  - Visa card # or bank transactions over the air!!
  - Securing the DTMF

5/20/2008

Dr. Ashraf S. Hasan Mahmoud

8

## Privacy Requirements

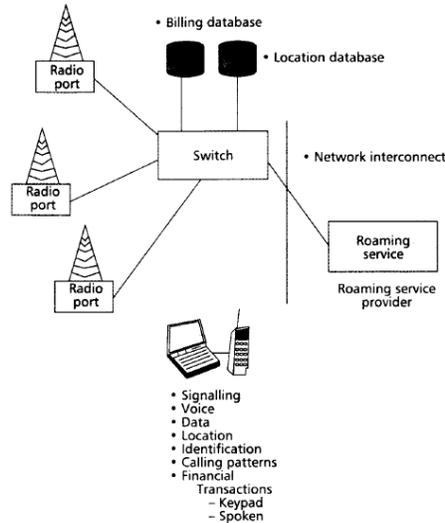

5/20/2008

Dr. Ashraf S. Hasan Mahmoud

9

## Theft Resistance Requirements

- Cryptographic design should make the reuse of stolen personal terminal difficult
  - Even if registered to a new legitimate account
- Clone Resistant Design
  - Mobile unique info must not be compromised
    - Over the air – eaves dropping
    - From the network – secure databases
    - From network interconnect – info passed between systems for security checking of roaming mobiles must have enough info to authenticate the mobile and not enough info to clone it!!
  - From users cloning their own mobiles

5/20/2008

Dr. Ashraf S. Hasan Mahmoud

10

## **Theft Resistance Requirements – cont'd**

---

- Installation Fraud
  - Cryptographic system must be designed to that installation cloning is reduced or eliminated
- Repair Fraud
- Unique User ID
  - Identify the correct person using the mobile for billing purposes
- Unique mobile ID
  - Different than user ID
  - Smart card or PCMCIA card containing all security info

5/20/2008

Dr. Ashraf S. Hasan Mahmoud

11

## **Radio System Requirements**

---

- Multipath Fading
  - Immune to sever burst errors
- Thermal Noise/Interference
  - The modulation scheme and the cryptographic system must be designed so that interference with shared users of the spectrum does not compromise the security of the system
- Jamming
  - Should work in the face of jamming – does not break
- Support for Handovers

5/20/2008

Dr. Ashraf S. Hasan Mahmoud

12

## Other Requirements

---

- Lifetime of ~20 years:
  - An algorithm that is secure today may be breakable in 5 to 10 years
- Physical Requirements:
  - Mass production
  - Exported and Imported
  - Minimal impact on handset size, weight, power consumption, etc.
  - Low-cost Level 1 implementation

5/20/2008

Dr. Ashraf S. Hasan Mahmoud

13

## Other Requirements – cont'd

---

- Law Enforcement Requirements
  - With the right court order, the law enforcement should be able to tap into the wireless calls
  - Over the air:
    - No encryption – easy
    - Breakable encryption
    - Strong encryption – problematic – need to obtain key
  - Wiretap at switch:
    - Preferred method – easiest

5/20/2008

Dr. Ashraf S. Hasan Mahmoud

14

## Network Security - Services

---

- (Def): Specific measures employing security mechanisms that combat security attacks on a network
- Include:
  - Confidentiality or Privacy: resistance to interception
  - Message Authentication: integrity of message and a guarantee that the sender is who he/she claims to be – Attacks: message modification or impersonation of sender
  - Nonrepudiation: service against denial by either party of creating or acknowledging a message – similar to digital signatures based on public key encryption – Attacks: fabrication
  - Access Control: only authorized entities can access – Attacks: Masquerading
  - Availability: access to resources is not prevented by malicious entities (remember [www.aljazeera.net](http://www.aljazeera.net)!!) – Attacks: denial of service

5/20/2008

Dr. Ashraf S. Hasan Mahmoud

15

## Privacy

---

- Encryption
  - one way of providing most of the previously listed services
  - SHOULD be computationally secure – non breakable ideally
- Terms:
  - Message – plaintext or cleartext
  - Encoded version – ciphertext
  - Key – k
- Time and Cost to break the scheme should be significant relative to protected value
  - Should assume interceptor has access to plaintext-ciphertext pairs


5/20/2008

Dr. Ashraf S. Hasan Mahmoud

16

## Conventional Encryption Model

- Secret-Key Algorithm

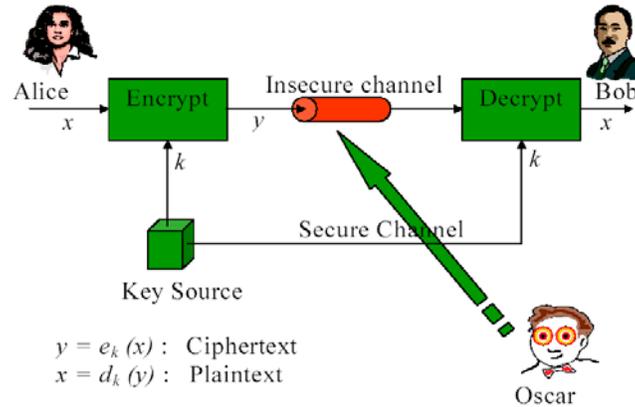

5/20/2008

Dr. Ashraf S. Hasan Mahmoud

17

## Secret Key Algorithms

- Example: Data Encryption Standard (DES)
- A symmetric key algorithm
  - Key used for encryption is the same as that used for decryption
- Two Principles:
  - Confusion  $\leftrightarrow$  scrambling of original data
  - Diffusion  $\leftrightarrow$  creating randomness – can not relate changes to plaintext to those of ciphertext
- Most secret-key algorithms are unbreakable except by brute-force
  - Key length of  $n$  bits  $\rightarrow$  at least  $2^{n-1}$  steps to break encryption – why?
- Main advantage – fast; appropriate for fast data streams
  - Compared to public-key algorithms


5/20/2008

Dr. Ashraf S. Hasan Mahmoud

18

## Date Encryption Standard (DES) – cont'd

- Usually a key size of 128 bits is recommended

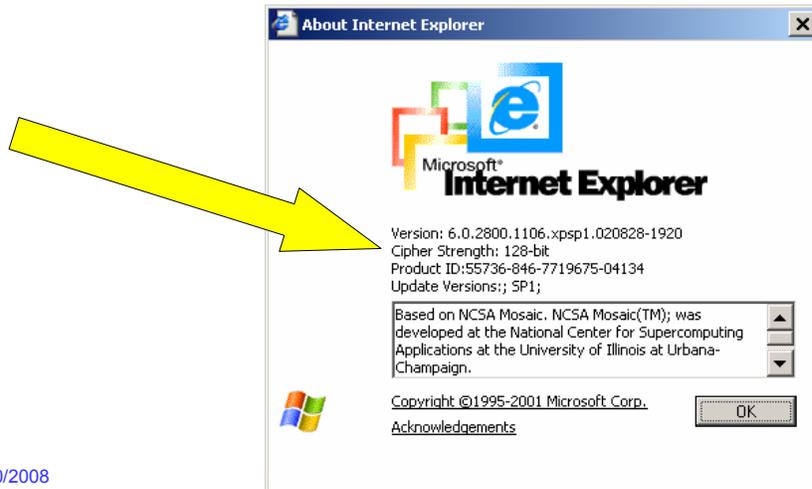

<http://www.laynetworks.com/des.htm>  
<http://www.funet.fi/pub/crypt/mirrors/ftp.dsi.unimi.it/docs/des-how-to.txt>  
<http://www.funet.fi/pub/crypt/mirrors/ftp.dsi.unimi.it/docs/des-how-to.txt>

### Example 6.20: Breaking DES

- DES is a block cipher: encrypts blocks of 64-bits of data using keys (56 bit long).
- Using brute force:
  - Use 500 MHz chip (each cost \$20)
- How much time and money does it cost to break DES?
- **Solution:**
- Total # of keys =  $2^{56} = 7.2 \times 10^{16}$ 
  - On average half the keys will be tried  $\rightarrow 2^{55}$  keys
- If it takes one clock cycle to test every key  $\rightarrow$  time needed =  $2^{55} / (500 \times 10^6) / (60 \times 60 \times 24) = 834$  days
- If 834 chips are used in parallel  $\rightarrow$  code can be broken in one day
- Cost =  $\$20 \times 834 = \$16,680$

5/20/2008

Dr. Ashraf S. Hasan Mahmoud

20

<http://www.laynetworks.com/des.htm>  
<http://www.funet.fi/pub/crypt/mirrors/ftp.dsi.unimi.it/docs/des-how-to.txt>  
<http://www.funet.fi/pub/crypt/mirrors/ftp.dsi.unimi.it/docs/des-how-to.txt>

## Example 6.21: Moore's Law

- Processor or chip speed doubles every 18 months → Strength of *any* encryption technique is weakened by time.
- DES algorithm using 112 bit keys can be broken in a day in 100 years from now!!

5/20/2008

Dr. Ashraf S. Hasan Mahmoud

21

<http://www.laynetworks.com/des.htm>  
<http://www.funet.fi/pub/crypt/mirrors/ftp.dsi.unimi.it/docs/des-how-to.txt>

## Example 6.21: Key Sizes

- IEEE802.11 – Wired-equivalent privacy (WEP):  
40-bit key
- IS-136 – 64-bit key – more secure but still considered weak

5/20/2008

Dr. Ashraf S. Hasan Mahmoud

22

## Public-key Algorithms

- Every pair of users have to have a key
  - A network of N users require the distribution of  $N(N-1)/2$  keys!
  - Large and impractical for large N
- Key distribution schemes:
  - E.g: Needham-Schroeder – Kerberos
  - Involves several handshaking steps – start with a shared *master key*
- Concept introduced by Diffie and Hellman in 1977

Exploring Diffie-Hellman Encryption  
 Posted on Friday, August 16, 2002 by Jack Dennon  
<http://www.linuxjournal.com/article.php?sid=6131>


5/20/2008

Dr. Ashraf S. Hasan Mahmoud

23

## Public-key Algorithms – cont'd

- It is extremely easy to compute  $y = f(k_{pub}, x)$
- Given  $k_{pub}$  and  $y$ , it is computationally not feasible to determine  $x = f^{-1}(k_{pub}, y)$
- With a knowledge of  $k_{prv}$  that is related to  $k_{pub}$  it is easy to determine  $x = f^{-1}(k_{prv}, y)$

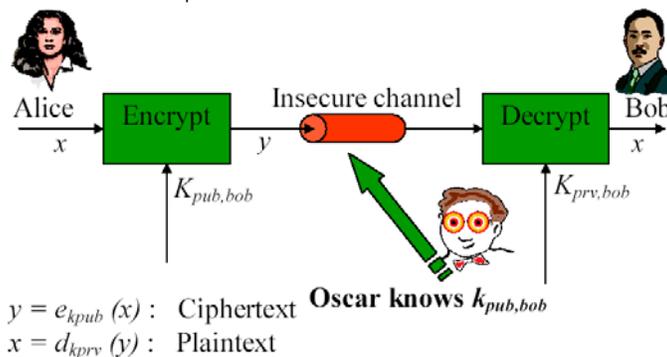

5/20/2008

Dr. Ashraf S. Hasan Mahmoud

24

## Public-key Algorithms – cont'd

- $f(.) \sim$  belongs to a group of functions referred to as a trapdoor one-way function - e.g:
  - Factorization:
    - It is easy to find  $7 \times 17 \times 109 \times 151 = 195,821$ ;
    - but it is quite difficult to split 30,616,693 into its prime number factors
  - Discrete logarithm:
    - It is easy to determine  $2^{23} \bmod 109$  is 77;
    - But it is difficult to find out  $u$  such that  $2^u \bmod 109$  is 68
- Since  $k_{\text{pub}}$  is available and the method is based on a mathematical structure  $\rightarrow$  need to be 3 to 15 times larger than the secret-key counter parts
- Elliptic Mathematics (refer to: <http://world.std.com/~dpj/elliptic.html>) provides a mean to use smaller keys with same level of security

5/20/2008

Dr. Ashraf S. Hasan Mahmoud

25

## Public-key Algorithms – Examples

- Rivest-Shamir-Adelman (RSA)
  - Employs integer factorization
  - Most popular
- Diffie-Hellman key-exchange
  - Based on discrete logarithm
  - Wireless networks
  - Used for key exchange for web transactions, e-commerce, IP security.
  - See appendix 6A for details
- Digital Signature Standard (DSS)
  - Based on discrete logarithms

5/20/2008

Dr. Ashraf S. Hasan Mahmoud

26

## Public-key Algorithms – Characteristics

---

- Computationally intensive
- Encryption rates quite small
- Rarely used for bulk data transfer
- Usually used to exchange a *session* key – to use a secret-key algorithm for later communications
  - Different session key each time!

5/20/2008

Dr. Ashraf S. Hasan Mahmoud

27

## Cost Equivalent Key Lengths (in Bits) of Various Encryption Schemes

---

Secret-key Algorithm	Elliptic Curve	RSA	Time to Break	Memory
56	112	430	Less than 5 mins	Trivial
80	160	760	600 months	4 Gb
96	192	1,020	3 million years	170 Gb
128	256	1,620	$10^{16}$ years	120 Tb

5/20/2008

Dr. Ashraf S. Hasan Mahmoud

28

## **Block vs. Stream Ciphers**

---

- Block Ciphers – DES and Advanced Encryption Standard (AES)
  - Encrypt blocks of data at a time
  - Requires buffering and padding
- Stream Ciphers – no need for buffering
  - More suitable for a jitter-sensitive service
  - Usually a simple XOR operation is used
- Example:
  - IEEE802.11 employs the encryption algorithm RC-4 to generate a pseudorandom key stream using a 40-bit master key and an initial vector (IV)
  - Data is simply XORed with the key to create ciphertext

5/20/2008

Dr. Ashraf S. Hasan Mahmoud

29

## **Message Authentication**

---

- Involved:
  - Sender authentication
  - Message integrity
- This is accomplished using a message digest (MD) and a message authentication code (MAC)

5/20/2008

Dr. Ashraf S. Hasan Mahmoud

30

## Message Authentication Code (MAC)

- MAC creates a fixed-length sequence of bits that depend on the message and the secret key
  - Not a function of message size
  - It is computationally infeasible to generate the MAC without the original message and key
- Message is then delivered (with the MAC) to destination
- Receiver computes MAC again based on received message
- New MAC is equal to old MAC IFF message was not tampered with (remember secret key is a secret!)

5/20/2008

Dr. Ashraf S. Hasan Mahmoud

31

## Message Digest (MD)


- MD depends only on the message  $x$
- A hash function,  $h$ , is used to create the MD,  $h(x)$
- The MD is appended to the message  $x \rightarrow x || h(x)$
- The newly overall message  $x || h(x)$  is encrypted using the secret-key
- $h(x)$  has to be sufficiently long
  - For a  $b$  bit  $h(x) \rightarrow$  a fake message with same  $h(x)$  can be generated in  $2^{b/2}$  trials

5/20/2008

Dr. Ashraf S. Hasan Mahmoud

32

## Message Authentication with Hash Functions

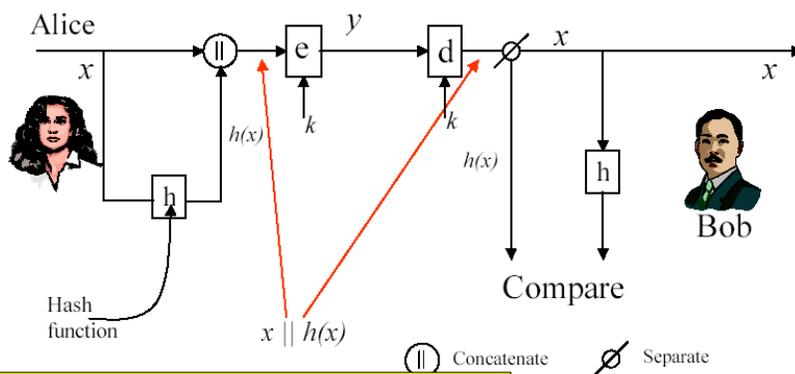

What is a hash function? Refer to <http://www.rsasecurity.com/rsalabs/faq/2-1-6.html>

- some of the hash function properties:
- The input can be of any length.
- The output has a fixed length.
- $H(x)$  is relatively easy to compute for any given  $x$ .
- $H(x)$  is one-way.
- $H(x)$  is collision-free.

ud

33

## MD and HMAC C++ code

- From [http://njet.org/doc/Doc/\\$24\\$24native/anvil/crypto.html](http://njet.org/doc/Doc/$24$24native/anvil/crypto.html)
- **Message Digest (MD)** provides applications the functionality of a message digest algorithm, such as MD5 or SHA. Message digests are secure one-way hash functions that take arbitrary-sized data and output a fixed-length hash value.
- **Message Authentication Code (MAC)** Since everyone can generate the message digest, it may not be suitable for some security related applications. Because of this, Anvil+ also supports HMAC (RFC2104), which is a mechanism for message authentication using a (secret) key. So you can use a key with a hash algorithm to produce hashes that can only be verified using the same key.

+ Anvil is a crypto library that can create message hash codes or checksums from any data. It is posted on the webpage listed above.

5/20/2008

Dr. Ashraf S. Hasan Mahmoud


34

<http://www.anu.edu.au/people/Roger.Clarke/DV/DigSig.html>  
<http://www.youdzone.com/signature.html>  
<http://computer.howstuffworks.com/question571.htm>  
<http://www.rsasecurity.com/rsalabs/faq/2-2-2.html>

## Digital Signature

- Def: a 'message digest' encrypted using the sender's private key
  - The receiver can verify the identity of the sender and the integrity of message by first decrypting the signature using the sender's public key – and then by reproducing the message digest and comparing it with the one received with message.

- What if a public key is not valid?
  - Use of Certificate Authority

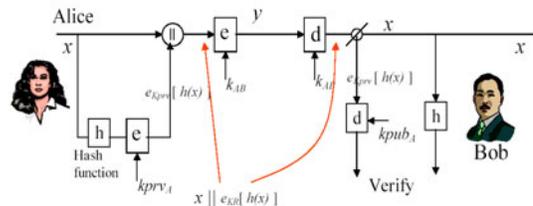

5/20/2008

Dr. Ashraf S. Hasan Mahmoud

35

## Methods for Providing Security for Mobile Wide Area Networks

- MIN/ESN
- Shared Secret (Key) Data
  - Shared Secret Key Registration
  - Shared Secret Key Global Challenge
  - Shared Secret Key Unique Challenge
- Security Triplets (Token Based)
  - Token-Based Registration
  - Token-Based Challenge
- Public Key Authentication

The following material is from Chapter 10 "Security and Privacy in Wireless Systems," in Wireless and Personal Communications Systems by V. Garg and J. Wilkes

5/20/2008

Dr. Ashraf S. Hasan Mahmoud

36

## MIN/ESN Authentication

- MIN = Mobile Identification Number (e.g. 10-digits)
- ESN = Electronic Serial Number (e.g. 32-bit)
- Data is shared between systems on bad MINs, ESNs, and MIN/ESN pairs
- When a roaming phone places a call, the bad list is checked, and then a message is sent to home system to validate the MIN/ESN (using SS7 on IS-41)

5/20/2008

Dr. Ashraf S. Hasan Mahmoud

37

## Shared Secret Data (SSD) Authentication

- Developed for TDMA systems (IS-54 and its derivatives)
- Utilizes a common authentication key in the mobile telephone and the network.
- When phone is placed in service a 64-bit A-key is entered into phone and network (HLR)
- From A-key two keys are derived: SSD-A and SSD-B – these are used to authenticate the phone and establish the voice privacy key
- Mobile is assigned a Temporary IMSI (TIMSI) when roaming into a foreign network – its identity (IMSI) is kept secret
- Mobile is authenticated by calculating AUTHR (an encrypted version of RAND sent by basestation) – encryption is done using SSD-A
- Mobile also possess a call-counter profile – every time the mobile makes a call, the counter is increments
  - A measure against cloning
- Procedures:
  - Shared Secret Key Registration
  - Shared Secret Key Global Challenge
  - Shared Secret Key Unique Challenge

All mobiles are assigned:  
- ESN  
- 15-digit International Mobile Subscriber Identity (IMSI)  
- An A-key  
- Plus other info

5/20/2008

Dr. Ashraf S. Hasan M

## Shared Secret Key Registration

1. PS determines if it must register with new network
2. PS listens on the control channel for the global challenge, RAND
3. PS send msg to RS with IMSI, RAND, and other parameters
4. RS validates RAND
5. RS sends an ISDN REGISTER msg to PCSC
6. PCSC receives the REGISTER msg and send a msg to the serving VLR
7. If PS is not currently registered to the serving VLR, the VLR sends an REGISTRATION NOTIFICATION (REGNOT) msg to the user's HLR containing the IMSI and other data
8. PS's HLR receives the REGNOT msg and updates its database
9. PS's HLR sends and IS-41 REGISTRATION CANCEL (REGCANC) msg to the old VLR
10. Old VLR returns confirmation msg that includes current value of CHCNT
11. Users HLR returns a REGNOT Response msg to the (new) VLR and passes along needed info user profile, shared secret key, current value of CHCNT, etc.)
12. VLR assigns TMSI and sends registration notification Response msg to PCSC
13. PCSC receives msg, retrieves data and sends ISDN REGISTER msg to RS
14. RS forwards REGISTER msg to PS to confirm registration

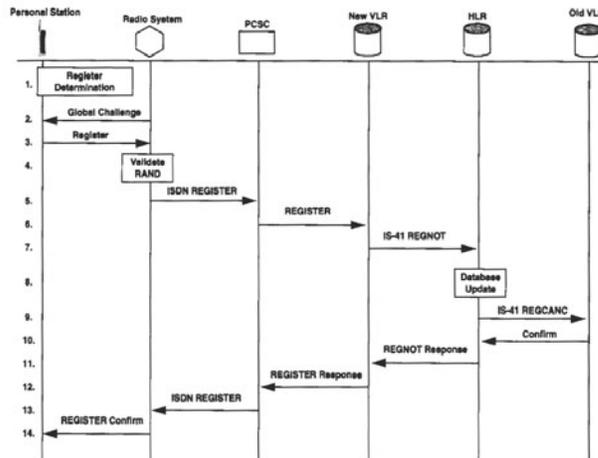


Fig. 10.4 Call Flows for PS Registration of All PSs Listening to a Control Channel

5/20/2008

Dr. Ashraf S. Hasan Mahmoud

39

## Shared Secret Key Global Challenge

1. RS continuously broadcasts RAND that changes periodically
2. PS calculates its specific response to the challenge (AUTHR) and includes it and RAND with a Service Request (registration, origination, page response, or data burst msg)
3. RS compares RAND with a short list of most recently sent RANDs
4. If RAND is valid, the RS sends a PCSAP msg to the PCSC with TMSI (or MIN or old TMSI), RAND, AUTHR, and other data as needed
5. PCSC sends an Authentication Request msg to the VLR with TMSI (or MIN or old TMSI) and RAND and requests that the VLR perform the same calculation as done by PS
6. VLR checks its database for TMSI (or MIN or old TMSI). If data is not in VLR, the VLR queries the HLR for the data. When data is available, VLR calculates value of AUTHR and looks up the value of CHCNT
7. VLR returns msg to PCSC
8. PCSC compares values of AUTHR and CHCNT from the PS and VLR
9. PCSC sends PCSAP msg (service accept or reject accordingly)
10. RS forwards accept or reject msg to PS\*

\*For Registration – this is Register Accept msg  
\*For pages or origination – this is "Traffic Channel Assignment"

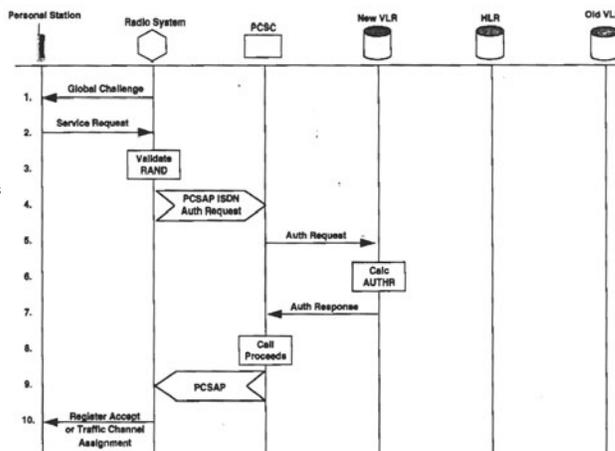


Fig. 10.5 Call Flows for a Global Challenge

5/20/2008

Dr. Ashraf S. Hasan Mahmoud

40

## Token Based Authentication – GSM

- Triplets:
  - pseudorandom number RAND;
  - its corresponding response, SRES, generated by authentication algorithm;
  - Temporary encryption key, Kc, used for data, signaling and voice privacy
- Triplets are requested by the visitor system from the home system
  - Computed and stored in the mobile, home authentication centre and the visited VLR
- Procedure: MS sends registration request – network sends unique challenge – MS calculates challenge response and sends message back to network. VLR contains list of triplets – compares with response from MS
  - The just-used triplet is discarded
  - After all triplets are used – VLR query HLR for a new set
- Anonymity is handled using IMSI/TIMSI
- No call history counter for GSM – no clone detection is possible
- Subscriber Identity Module (SIM) – microprocessor-based secure system

5/20/2008

Dr. Ashraf S. Hasan Mahmoud

41

## Token-Based Registration

1. PS sends registration msg to new network with old TMSI and old LAI
2. Network queries old VLR for data
3. Old VLR return security related info (e.g. unused triplets and location of HLR)
4. Network challenges PS
5. PS responds to challenge
6. Network assigns new TMSI
7. Network sends a msg to H with location update info
8. HLR updates its location database with new location
9. HLR acks and sends extra security data (more triplet)
10. HLR sends registration cancellation msg to old visited networks
11. Network sends encrypted msg to PS with new TMSI
12. PS acks msg

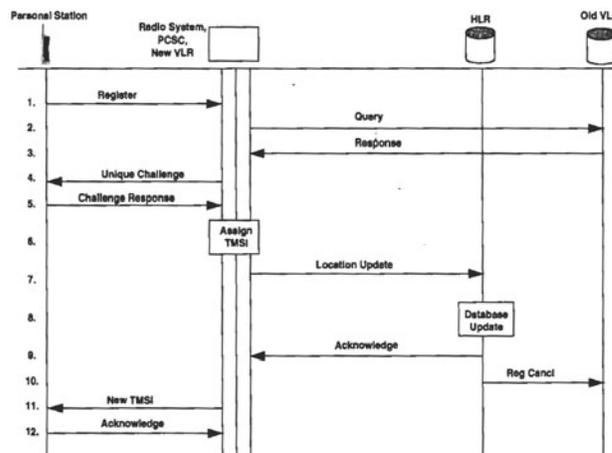


Fig. 10.7 Token-Based Registration

Dr. Ashraf S. Hasan Mahmoud

5/20/2008

42

## Token-Based Challenge

1. Network transmits a nonpredictable RAND to PS
2. PS computes the signature (SRES) of RAND using the encryption algorithm and the user authentication key (Ki)
3. PS transmits the SRES to network
4. The PCSC sends a msg to the VLR requesting an authentication
5. VLR test SRES for validity
6. VLR returns the status to PCSC
7. PCSC sends msg to the PS with a success or failure indication

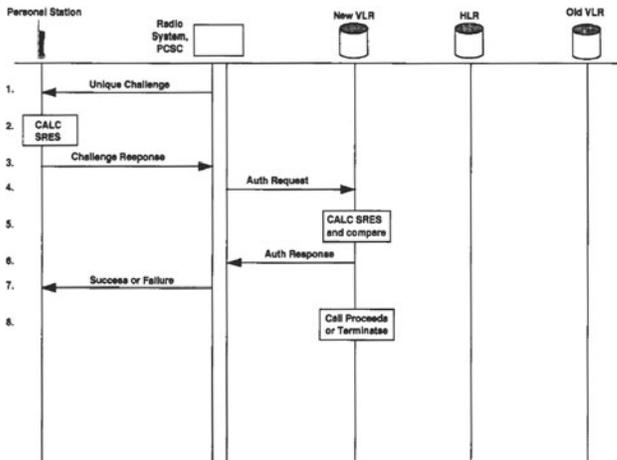


Fig. 10.8 Token-Based Unique Challenge  
Dr. Ashraf S. Hasan Mahmoud

5/20/2008

43

## Public-Key-Based Authentication

- Public-key method – two user keys are used
  - Public (USERPUB) for encrypting
  - Private (USERPRIV) for decrypting
- The network also has NETPUB and NETPRIV
- Used in PACS

5/20/2008

Dr. Ashraf S. Hasan Mahmoud

44

## Summary of Authentication Methods\*

Air Interface	Type of Authentication				Type of Voice Privacy Supported
	MIN/ESN	SSD	Token-Based	Public Key	
AMPS	x	x			None
CDMA		x			Strong
GSM			x		Strong
PACS		x		x	Strong
PCS-2000		x	x		Strong
TDMA		x			Weak
W-CDMA		x			Strong

\*From V. Garg and J Wilkes, Wireless And Personal Communications Systems, Printice Hall PTR, 1996 – chapter 10  
5/20/2008

Dr. Ashraf S. Hasan Mahmoud

45

## Identification Schemes

- Need:
  - Access to an automatic teller machine
  - Logging on to a computer
  - Identifying a user of a cellular phone
  - Etc.
- Identification = entity authentication
  - A password or a pin compared to a securely stored hash value
  - Susceptible to replay attacks if transmitted over-the-air in an insecure manner
- Challenge-Response identification or Strong identification
  - Used in wireless networks

5/20/2008

Dr. Ashraf S. Hasan Mahmoud

46

## Identification Schemes – cont'd

- A nonce: a value employed no more than once for the same purpose
  - Eliminates *replay* attacks

5/20/2008

Dr. Ashraf S. Hasan Mahmoud


47

<http://www.qualcomm.com.au/PublicationsDocs/AUUG99AuthSec.pdf>

## Identification Schemes – cont'd

### Example: Challenge-Response mechanism in IS-41

1. Consider an IS-136 digital TDMA network
2. The network (BSS) generates a random # RANDU and sends it over the air to mobile
3. Mobile computes a value AUTHU using the encryption algorithm Cellular Authentication and Voice Encryption (CAVE)
4. AUTHU is sent to network and compared with a computed version at the network
5. If the two AUTHU match → the mobile is authenticated – using IS-41 terminology

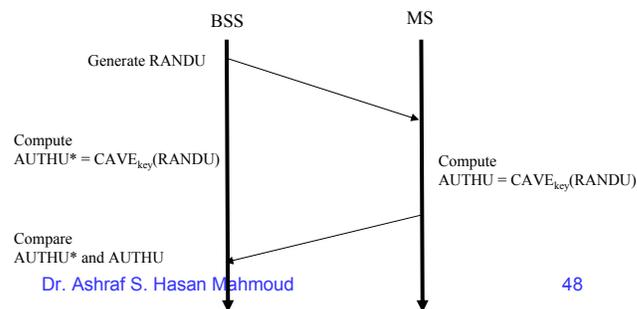

5/20/2008

Dr. Ashraf S. Hasan Mahmoud

48

## IEEE802.11 Security & Privacy

- Objectives:
  - To provide a wired equivalent privacy (WEP)
  - To protect against
    - Eavesdropping
    - Unauthorized access

1. <http://www.cs.umd.edu/~waa/wireless.html> and the references therein especially the following paper: "[Your 802.11 network has no clothes.](#)"
2. <http://www.mobileinfo.com/Security/index.htm>


5/20/2008

Dr. Ashraf S. Hasan Mahmoud

49

## MAC Frame Format

- General MAC frame format & Control Field
- WEP = 1 → data bits are encrypted (refer to chapter 11 of Pahlavan)

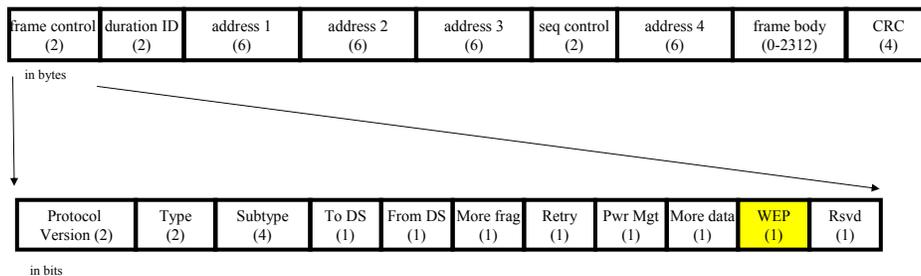

5/20/2008

Dr. Ashraf S. Hasan Mahmoud

50

## Authentication Schemes for IEEE802.11

- Three schemes:
  1. Open system authentication
    - Default – uses SSID as a password to gain access
    - NULL Authentication function – authenticates anyone requesting authentication
    - Not secure
  2. Shared key authentication (WEP based)
    - 40-bits key
    - Not very secure
    - Standard does not specify key management or where to get this key from!!
    - Optional for IEEE802.11 (required to be Wi-Fi certified by WECA)
  3. Access Control List (MAC address filtering)
    - MAC address based
    - Not scalable – requires manual setting
- Not available for ad-hoc


<http://www.cs.umd.edu/~waa/wireless.html> (802.11 Security Vulnerabilities )  
<http://www.isaac.cs.berkeley.edu/isaac/wep-faq.html>

5/20/2008


Dr. Ashraf S. Hasan Mahmoud

51

## Authentication Schemes for IEEE802.11



Open System Authentication



Shared-key Authentication

Challenge text: The challenge text is generated by using the WEP pseudo-random number generator (PRNG) with the "shared secret" and a random initialization vector (IV)

Challenge response: encrypted with WEP using the "shared secret" along with a new IV

5/20/2008

Dr. Ashraf S. Hasan Mahmoud

52

## Security Threats


- Theft of Hardware
  - Admin has to reprogram WEP keys
- Rogue Access Points
  - IEEE802.11b shared-key authentication is one way (i.e. AP authenticates mobile)
  - User can not authenticate AP → rogue APs
- Per-packet encryption versus per-packet authentication → to protect against spoofing and replay attacks
  - WEP keys may change frequently
  - Use per-session WEP keys

5/20/2008

Dr. Ashraf S. Hasan Mahmoud

53

## Privacy in IEEE802.11

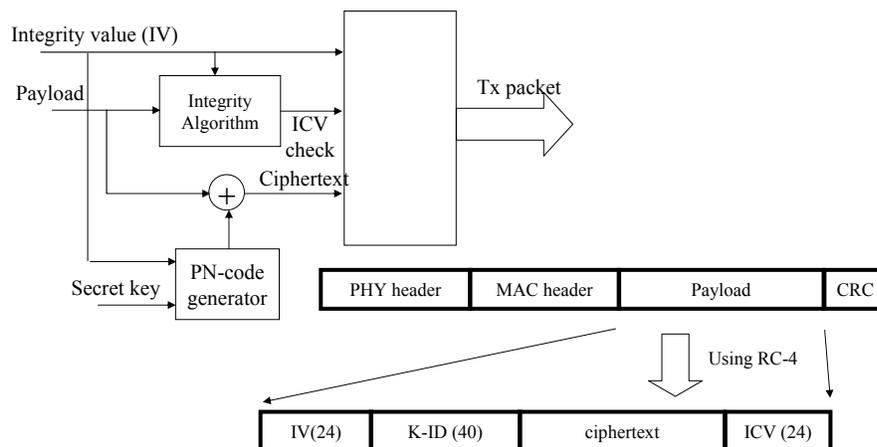


Note that the IV and the key-ID are sent in the clear!  
Same shared key for uplink and downlink

Dr. Ashraf S. Hasan Mahmoud

54

## WEP Operation

- Each packet has its own RC4 key

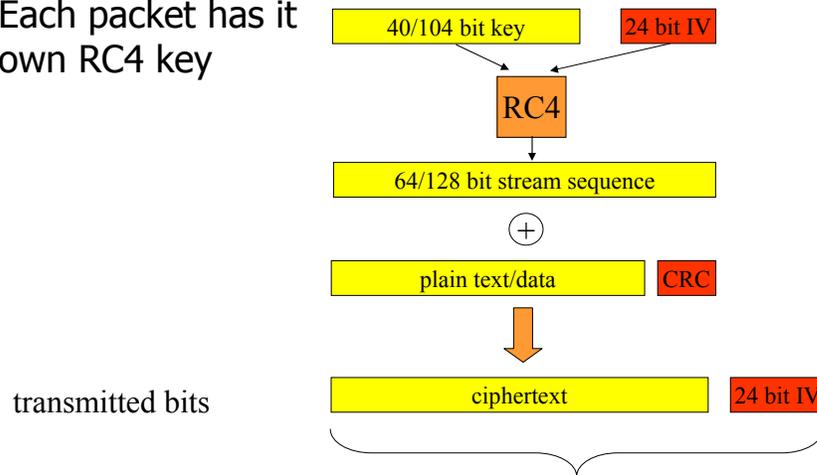

5/20/2008

Dr. Ashraf S. Hasan Mahmoud

55

## Problems With WEP

- IV Collision: two packets using same IV → one can deduce info about the two packets and then easily decrypt them (see Borisov, N. Goldberg, I. & Wagner, D. Intercepting Mobile Communications: The Insecurity of 802.11. <http://www.isaac.cs.berkeley.edu/isaac/wep-draft.pdf>, August, 2001) – the 24-bit IV will repeat in about 5 hours for an 11 Mbps WLAN with 1500 B maximum frame size
- Plaintext Attacks: Getting the user to transmit a known plaintext– the attacker then then infer the remaining XORed plain text. It is possible to expect what the plaintext should look like (for example structured IP/TCP header info), and then use the info to recover the rest of the plaintext or packet

5/20/2008

Dr. Ashraf S. Hasan Mahmoud

56

## **RC4 Encryption (Stream Cipher)**

- *Reasonable* strong:
  - A brute force attack on this algorithm is difficult since every frame is sent with a different IV
  - IV restarts the pseudo random number generator (PRNG) for each frame
- Self-Synchronizing:
  - Even if some intermediate frames are lost, the WEP algorithm resynchronizes at each frame

5/20/2008

Dr. Ashraf S. Hasan Mahmoud

57

## **Encryption Keys**

- Window of four keys
  - Can be manually configured – up to four keys
  - Each is 40 bits (5 ascii or 10 hex digits)
  - For all network
- Key-mapping table
  - Each unique MAC address has separate keys – one per device
  - Need to be configured manually
  - Most secure

5/20/2008

Dr. Ashraf S. Hasan Mahmoud

58