

KING FAHD UNIVERSITY OF PETROLEUM & MINERALS

Electric Engineering Department

EE 306 Electric Energy Engineering - Experiment#2

MAGNETIC CIRCUITS

Objective:

1. To determine the B-H characteristics of an iron core
2. To find the relative permeability (μ_r)
3. To calculate the reluctance "R"

Apparatus:

- 1 Rectangular laminated core
- 1 coil
- 1 voltmeter
- 1 ammeter
- 1 variable AC supply

Theory:

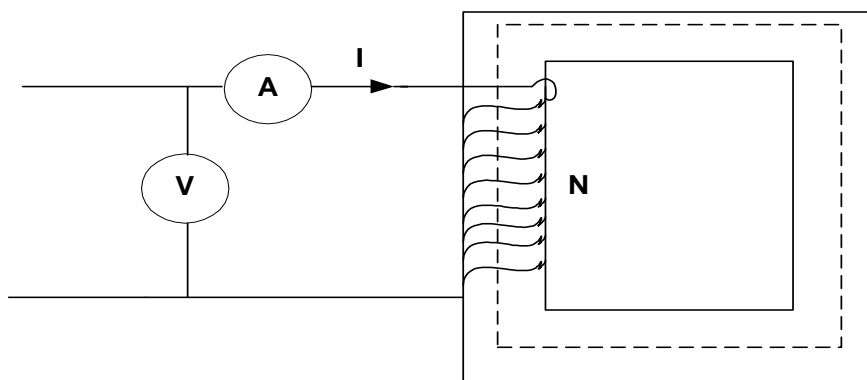


Fig. 1 : A simple rectangular core

If a current of 1 A, flows from a supply of E volts through a coil of N turns, as shown in fig 1, the magnetic field intensity can be written as

$$H = NL / L_c \quad (1)$$

From faraday's law of electromagnetic induction, the rms values of the induced voltage across the coil (E) is

$$\begin{aligned} E &= \omega N \Phi \\ &= \omega N A B \end{aligned} \quad (2)$$

$$B = \mu H \quad (3)$$

From (1), (2) and (3) it is clear that E-I characteristic of the core is equivalent to the B-H characteristic. Further, it can be shown that

$$E = \frac{\omega N^2 A \mu I}{L_c} \quad (4)$$

Where, the permeability can be written as:

$$\mu = \mu_r \mu_o; \quad \mu_o = 4 \pi \times 10^{-7} \quad (\text{H/n})$$

The reluctance of the core can be expressed as:

$$\begin{aligned} R &= NI / \Phi \\ &= L_c / (\mu A) \end{aligned} \quad (5)$$

Procedure

1. Find the typical dimensions of the core. The instructor may help you to get the accurate numbers.
2. Connect the circuit as in fig 1
3. On a separate sheet of paper make a table as shown below:

Table 1

E	I	K= E / I	μ_r	R

4. Set the input voltage of 10V. Record the current and enter them in table 1.

5. Repeat step 4 up to 150 volts in steps of 10 volts.

Report

1. Plot E Vs I on a graph paper.
2. Find K, and R for each reading and complete the table. Here,

$$K = E / I$$

$$\mu_r = \frac{KL_c}{2 \pi f N^2 A \mu_o}$$

3. Plot μ and R as functions of I
4. Derive equations (4) and (5)

Core Dimensions:

$L_c = 40 \text{ cms}$
$N = 400 \text{ turns}$
$A = 9 \text{ Sq. cms}$