




- Q1 Q0 A helicopter lifts an 80 kg man vertically from the ground  
Q0 by means of a cable. The upward acceleration of the man  
Q0 is  $2.0 \text{ m/s}^2$ . Find the rate at which the work is being  
Q0 done on the man by the tension of the cable when the speed  
Q0 of the man is  $1.5 \text{ m/s}$ .  
Q0  
A1  $1.4 \times 10^3 \text{ W}$   
A2  $1.1 \times 10^3 \text{ W}$   
A3  $1.2 \times 10^4 \text{ W}$   
A4  $1.8 \times 10^3 \text{ W}$   
A5  $2.5 \times 10^4 \text{ W}$   
Q0
- Q2 Q0 A force  $F = (3.00 \text{ i} + 7.00 \text{ j}) \text{ N}$  acts on a  $2.00 \text{ kg}$  object  
Q0 that moves from an initial position  $r_1 = (3.00\text{i} - 2.00\text{j}) \text{ m}$   
Q0 to a final position  $r_2 = (5.00 \text{ i} + 4.00 \text{ j}) \text{ m}$  in  $4.00 \text{ s}$ .  
Q0 What is the average power due to the force during that  
Q0 time interval?  
Q0  
A1  $12.0 \text{ W}$   
A2  $7.00 \text{ W}$   
A3  $8.00 \text{ W}$   
A4  $6.00 \text{ W}$   
A5  $16.0 \text{ W}$   
Q0
- Q3 Q0 A  $5.0\text{-kg}$  block is moving horizontally at  $6.0 \text{ m/s}$ . In order to  
Q0 change its speed to  $10.0 \text{ m/s}$ , the net work done on the block  
Q0 must be :  
Q0  
A1  $160 \text{ J}$   
A2  $40 \text{ J}$   
A3  $90 \text{ J}$   
A4  $400 \text{ J}$   
A5  $550 \text{ J}$   
Q0
- Q4 Q0 A  $3.00 \text{ kg}$  block is dropped from a height of  $40 \text{ cm}$  onto a spring  
Q0 of spring constant  $k$  (see Fig 2). If the maximum distance the  
Q0 spring is compressed =  $0.130 \text{ m}$ , find  $k$ .  
Q0  
A1  $1840 \text{ N/m}$   
A2  $980 \text{ N/m}$   
A3  $490 \text{ N/m}$   
A4  $1250 \text{ N/m}$   
A5  $2800 \text{ N/m}$   
Q0
- Q5 Q0 A  $6.0 \text{ kg}$  box starts up a  $30$  degrees incline with  $158 \text{ J}$  of  
Q0 kinetic energy. How far will it slide up the incline if the  
Q0 coefficient of kinetic friction between box and incline is  
Q0  $0.40$  ?  
Q0  
A1  $3.2 \text{ m}$   
A2  $2.2 \text{ m}$   
A3  $1.2 \text{ m}$   
A4  $4.2 \text{ m}$   
A5  $5.2 \text{ m}$   
Q0




**Figure 1**




**Figure 2**

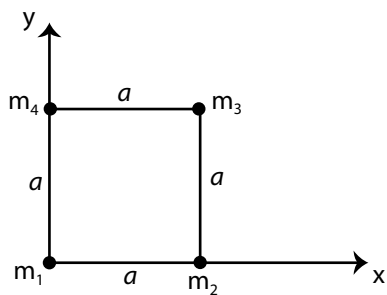


**Figure 3**

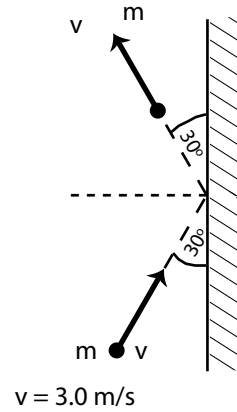


**Figure 4**

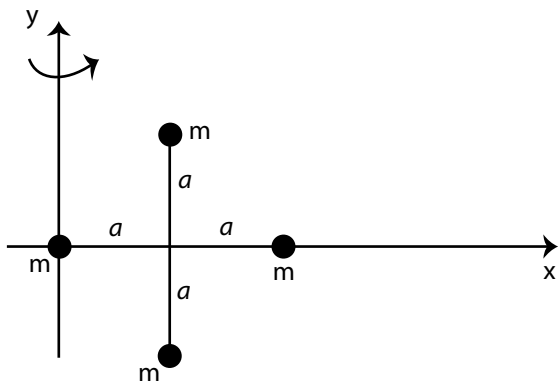

**Figure 5**

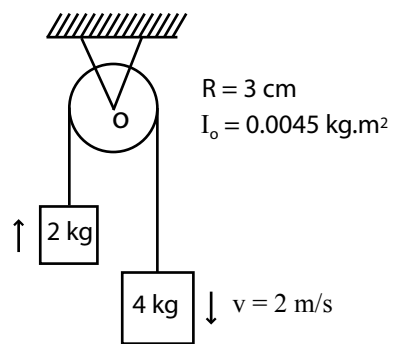

**Figure 6**

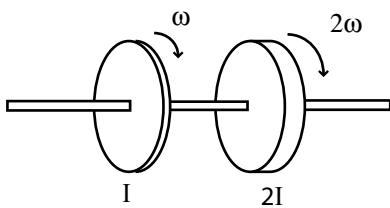

**Figure 7**

- Q6 Q0 Fig 1 shows a pendulum of length  $L = 1.0$  m. Its ball has  
 Q0 speed of  $v_0 = 2.0$  m/s when the cord makes an angle of 30  
 Q0 degrees with the vertical. What is the speed ( $V$ ) of the  
 Q0 ball when it passes the lowest position?  
 Q0  
 A1 2.6 m/s  
 A2 3.8 m/s  
 A3 4.4 m/s  
 A4 5.2 m/s  
 A5 1.4 m/s  
 Q0
- Q7 Q0 To pull a 100 kg object across a horizontal frictionless  
 Q0 floor, a worker applies a force of 220 N, directed 60 degrees  
 Q0 above the horizontal. As the object moves 5.0 m, what is the  
 Q0 work done on the object?  
 Q0  
 A1 550 J  
 A2 500 J  
 A3 400 J  
 A4 600 J  
 A5 650 J  
 Q0
- Q8 Q0 Four masses,  $m_1 = 1.0$  kg,  $m_2 = 2.0$  kg,  $m_3 = 3.0$  kg and  
 Q0  $m_4 = 4.0$  kg are placed at the corners of a square of side  
 Q0  $a = 1.0$  m, as shown in Fig 3. The  $x$  and  $y$  coordinates of  
 Q0 their center of mass are:  
 Q0  
 A1 (0.5 m, 0.7 m(  
 A2 (1.0 m, 1.0 m(  
 A3 (0.5 m, 0.5 m(  
 A4 (0.5 m, 0.0 m(  
 A5 (0.0 m, 0.0 m(  
 Q0
- Q9 Q0 A 1.0 kg ball strikes a vertical wall at an angle of 30 degrees  
 Q0 with a speed of 3.0 m/s and bounces off at the same angle  
 Q0 with the same speed, as shown in Fig 4. The change in  
 Q0 momentum of the ball is :  
 Q0  
 A1 3 kg\*m/s to the left  
 A2 9 kg\*m/s to the left  
 A3 3 kg\*m/s to the right  
 A4 0 kg\*m/s  
 A5 6 kg\*m/s upward  
 Q0
- Q10 Q0 A 6.0 kg body moving with velocity  $v$  breaks up (explodes) into  
 Q0 two equal masses. One mass travels east at 3.0 m/s and the  
 Q0 other mass travels north at 2.0 m/s. The speed  $v$  of the  
 Q0 6.0 kg mass is:  
 Q0  
 A1 1.8 m/s  
 A2 5.0 m/s  
 A3 1.0 m/s  
 A4 2.0 m/s  
 A5 3.0 m/s  
 Q0
- Q11 Q0 In an inelastic collision between two objects with no external  
 Q0 forces,  
 Q0  
 A1 momentum is conserved but kinetic energy is not conserved  
 A2 kinetic energy is conserved but momentum is not conserved  
 A3 both momentum and kinetic energy are conserved

A4 neither momentum nor kinetic energy are conserved  
A5 kinetic energy is equal to half of momentum

Q0

Q12Q0 A 1.0 kg ball falling vertically hits a floor with a velocity  
Q0 of 3.0 m/s and bounces vertically up with a velocity of 2.0 m/s .  
Q0 If the ball is in contact with the floor for 0.10 s, the  
Q0 average force on the floor by the ball is:

Q0

A1 50 N down

A2 30 N down

A3 0 N

A4 20 N up

A5 40 N up

Q0

Q13Q0 A 2.0 kg block with a speed of 4.0 m/s undergoes a head on  
Q0 ELASTIC collision with a 4.0 kg block initially at rest. After  
Q0 the collision, the 4.0 kg block has 14.2 J of kinetic energy .  
Q0 The speed of the 2.0 kg block after the collision is:

Q0

A1 1.3 m/s

A2 4.0 m/s

A3 0 m/s

A4 2.0 m/s

A5 2.6 m/s

Q0

Q14Q0 A wheel initially has an angular velocity of 18 rad/s but it is  
Q0 slowing at a constant rate of 2.0 rad/s\*\*2. The time it takes  
Q0 to stop is :

Q0

A1 9.0 s

A2 3.0 s

A3 6.0 s

A4 12.0 s

A5 0. s

Q0

Q15Q0 Two wheels A and B are identical. Wheel B is rotating with  
Q0 twice the angular velocity of wheel A. The ratio of the radial  
Q0 acceleration of a point on the rim of B ( $a_2$ ) to the radial  
Q0 acceleration of a point on the rim of A ( $a_1$ ) is ( $a_2/a_1$ ) is (

Q0

A1 4

A2 2

A3 1/2

A4 1/4

A5 1

Q0

Q16Q0 Four identical particles, each with mass  $m$ , are arranged in the  
Q0  $x, y$  plane as shown in Fig 5. They are connected by light sticks  
Q0 of negligible mass to form a rigid body. If  $m = 2.0$  kg and  
Q0  $a = 1.0$  m, the rotational inertia of this system about the  
Q0  $y$ -axis is:

Q0

A1 12  $\text{kg}\cdot\text{m}^2$

A2 4.0  $\text{kg}\cdot\text{m}^2$

A3 8.0  $\text{kg}\cdot\text{m}^2$

A4 16  $\text{kg}\cdot\text{m}^2$

A5 0  $\text{kg}\cdot\text{m}^2$

Q0

Q17Q0 Fig 6 shows a pulley ( $R=3.0$  cm and  $I_o= 0.0045 \text{ kg}\cdot\text{m}^2$  (  
Q0 suspended from the ceiling. A rope passes over it with a 2.0 kg  
Q0 block attached to one end and a 4.0 kg block attached to the

Q0 other. When the speed of the heavier block is 2.0 m/s  
Q0 the total kinetic energy of the pulley and blocks is :

Q0

A1 22 J

A2 10 J

A3 2 J

A4 16 J

A5 38 J

Q0

Q18Q0 A 3.0 kg wheel, rolling smoothly on a horizontal surface, has  
Q0 a rotational inertia about its axis=  $M \cdot R^2 / 2$ , where M is its  
Q0 mass and R is its radius. A horizontal force is applied to the  
Q0 axle so that the center of mass has an acceleration of  
Q0 2.0 m/s<sup>2</sup>. The magnitude of the frictional force of the  
Q0 surface is :

Q0

A1 3.0 N

A2 6.0 N

A3 9.0 N

A4 12 N

A5 0 N

Q0

Q19Q0 Fig 7 shows two disks mounted on bearings on a common axis .  
Q0 The first disk has rotational inertia I and is spinning with  
Q0 angular velocity  $\omega$ . The second disk has rotational inertia 2I  
Q0 and is spinning in the same direction as the first disk with  
Q0 angular velocity 2 $\omega$ . The two disks are slowly forced toward each  
Q0 other along the axis until they stick and have a final common  
Q0 angular velocity of:

Q0

A1  $5\omega/3$

A2  $\omega \sqrt{3}$

A3  $\omega$

A4  $3\omega$

A5  $2\omega$

Q0

Q20Q0 A hoop has a mass of 200 grams and a radius of 25 cm. It rolls  
Q0 without slipping along a level ground at 500 cm/s. Its total  
Q0 kinetic energy is :

Q0

A1 5 J

A2 25 J

A3 10 J

A4 2 J

A5 0 J