

## Chapter 30

### Question 1


A square loop of wire lies in the plane of the page. A decreasing magnetic field is directed into the page. The induced current in the loop:

- a is counterclockwise.
- b is clockwise in two of the loop sides and counterclockwise in the other two.
- c depends upon whether or not  $B$  is decreasing at a constant rate
- d is clockwise.
- e is zero.

### Question 2

A rectangular loop of wire is placed midway between two long straight parallel conductors as shown in figure (11). The conductors carry currents  $i_1$  and  $i_2$  as indicated. If  $i_1$  is increasing and  $i_2$  is constant, then the induced current in the loop is:

- a depends on  $i_1 + i_2$ .
- b counterclockwise.
- c zero.
- d depends on  $i_1 - i_2$ .
- e clockwise.



### Question 3

A 200-turn coil has a cross sectional area of  $0.20 \text{ m}^2$  and a resistance of 20 ohms. The coil is placed in a magnetic field perpendicular to the plane of the coil. The magnitude of the magnetic field decreases from 1.6 milli-T to zero in 0.020 seconds. What is the current induced in the coil ?

- a 32.0 mA
- b 3.20 mA
- c 16.0 mA
- d 160 mA
- e 0.800 mA

Question 4

A long straight wire is in the plane of a rectangular conducting loop as shown in Figure 8. The straight wire carries an increasing current “i” in the direction shown. The current in the rectangular is:

- a counter clockwise in the left side and clockwise in the right side.
- b zero.
- c counter clockwise.
- d clockwise.
- e clockwise in the left side and counter clockwise in the right side.

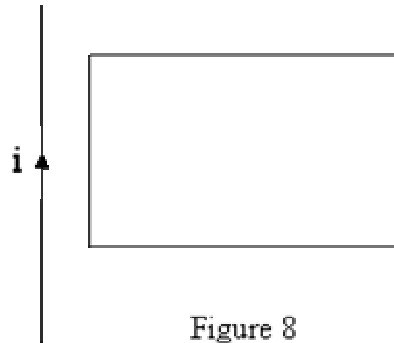


Figure 8

Question 5

The circuit shown in figure 9 is in a uniform magnetic field that is into the page and is decreasing in the magnitude at the rate of 150 T/s. The current in the circuit is:

- a 0.15 A.
- b 0.22 A.
- c 0.18 A.
- d 0.62 A.
- e 0.40 A.


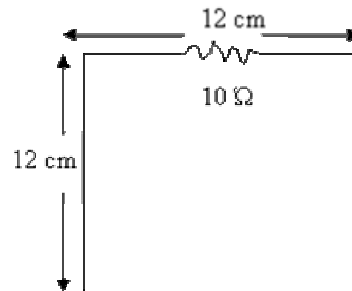


Figure 9

Question 6

Figure 12 shows a conducting loop consisting of a half circle of radius 0.20 m and three straight sections. The loop lies in a uniform magnetic field that is directed as shown in the figure and is given by:  $B = (4.5 \cdot t^2) - (10 \cdot t)$ , with B in tesla and t in seconds. What is the magnitude of the induced emf at  $t = 10$  s ?

- a 10 V
- b 5.0 V
- c 4.1 V
- d 6.3 V
- e 8.2 V

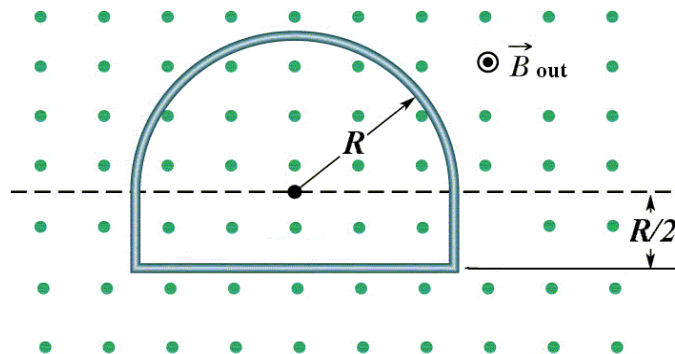

Question 7

A 2.0-T uniform magnetic field (in the x-y plane) makes an angle of 30 degrees with the y-axis. The magnetic flux through a 4.0-m<sup>2</sup> portion of the xz plane is:

- a 6.9 Wb
- b 4.0 Wb
- c 12 Wb
- d 3.0 Wb
- e 8.0 Wb

Question 8

Figure 10 shows a bar moving to the right on two conducting rails. To make an induced current in the direction indicated, a constant magnetic field in region “A” should be in what direction?

- a Left.
- b Impossible; this cannot be done

with a constant magnetic field.

- c Right.
- d Out of the page.
- e Into the page.


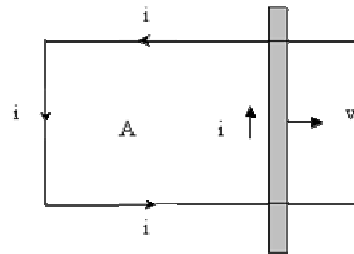


Figure 10

Question 9

The square coil shown in figure(12) is 20 cm on a side and has 15 turns of wire on it. It is moving to the right at 2 m/s. Find the induced emf in it at the instant shown, and the direction of the induced current in the coil. (The magnetic field is 0.2 T and its direction is out of the page.)


- a 3.6 V, counter-clockwise
- b zero
- c 1.2 V, clockwise
- d 1.2 V, counter-clockwise
- e 3.6 V, clockwise

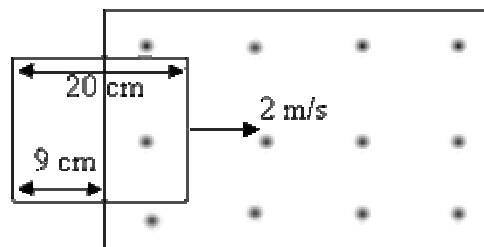

Question 10

A metal rod of resistance 12 ohms is forced to move with constant velocity along two parallel metal rails as shown in figure 13. A magnetic field of magnitude 0.35 T is directed as shown in the figure. The separation between the rails is 25.0 cm and the speed of the rod is 45.0 cm/s. What is the current in the rod ? Neglect the resistance of the rails.


- a 1.43 mA  
counterclockwise
- b 1.43 mA clockwise
- c 3.28 mA clockwise
- d 2.32 mA clockwise
- e 3.28 mA  
counterclockwise

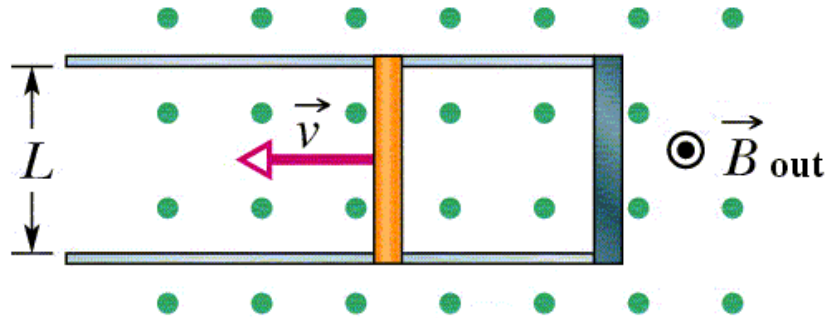

Question 11

A long straight wire is parallel to one edge and is in the plane of a rectangular conducting loop as shown in figure 11. The straight wire carries a constant current. While the wire is being moved toward the loop, the current induced in the loop is

- a clockwise.
- b decreasing.
- c always equal to the current in the wire.
- d zero.
- e counterclockwise.

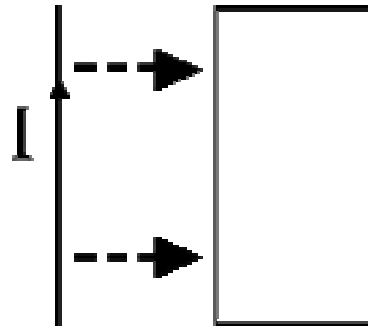

## Answers

- 1 d
- 2 b
- 3 d
- 4 c
- 5 b
- 6 e
- 7 a
- 8 e
- 9 c
- 10 c
- 11 e