



2-26 The piece of rubber is originally rectangular and subjected to the deformation shown by the dashed lines. Determine the average normal strain along the diagonal DB and side AD .

Shear strain in the plate relative to x-y axis

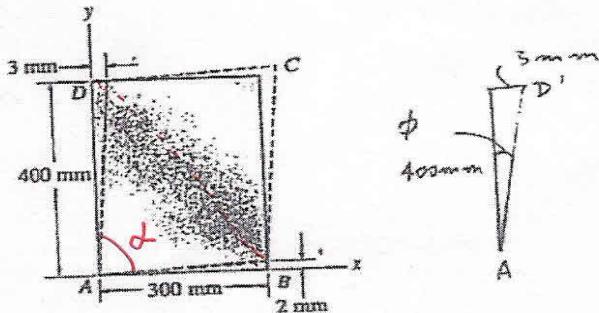


$$AD' = \sqrt{(400)^2 + (3)^2} = 400.01125 \text{ mm}$$

$$\phi = \tan^{-1} \left(\frac{3}{400} \right) = 0.42971^\circ = 0.0075 \text{ rad}$$

$$AB' = \sqrt{(300)^2 + (2)^2} = 300.00667$$

$$\varphi = \tan^{-1} \left(\frac{2}{300} \right) = 0.381966^\circ = 0.006667 \text{ rad}$$

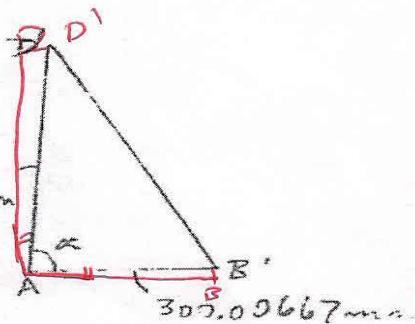

$$\alpha = 90^\circ - 0.42971^\circ - 0.381966^\circ = 89.18832^\circ$$

$$D'B' = \sqrt{(400.01125)^2 + (300.00667)^2 - 2(400.01125)(300.00667) \cos(89.18832^\circ)}$$

$$D'B' = 496.6014 \text{ mm}$$

$$DB = \sqrt{(300)^2 + (400)^2} = 500 \text{ mm}$$

$$\varepsilon_{DB} = \frac{496.6014 - 500}{500} = -0.00680 \text{ mm/mm} \quad \text{Ans}$$

$$\varepsilon_{AD} = \frac{400.01125 - 400}{400} = 0.0281(10^{-3}) \text{ mm/mm} \quad \text{Ans}$$


$$\begin{aligned} \delta_{xy} &= \cancel{\alpha = 89.18832^\circ} \\ &\quad 0.0075 + 0.006667 \\ &= 0.0142 \text{ rad} \end{aligned}$$

Problem 2: (20 points)

The stress-strain diagram for a specimen having a length of 300 mm and a diameter of 25 mm is shown below.

- Determine the modulus of elasticity, the ultimate stress and the fracture stress.
- Determine the yield strength using the 0.2% offset method.
- Determine the new length and diameter when the specimen is stressed to 400 MPa.
- Determine the final length when the specimen is stressed to 600 MPa and then unloaded.

$$v = 0.35$$

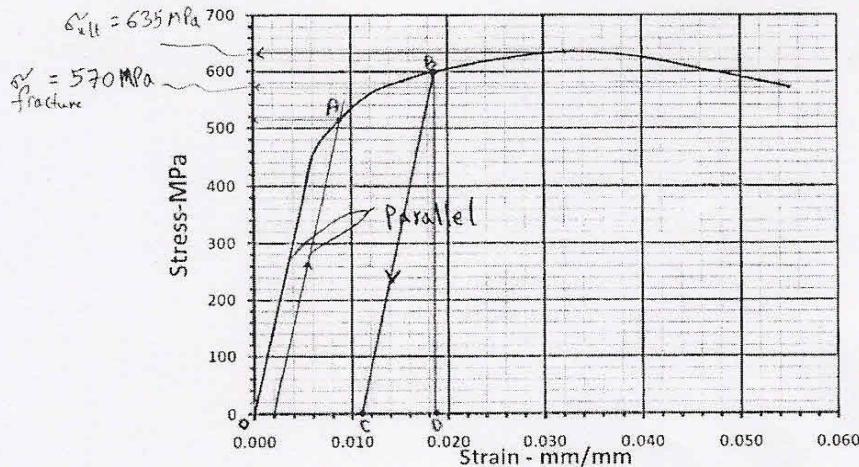

$$\text{The modulus of elasticity, } E = \frac{300 \text{ MPa} - 0}{0.004 \frac{\text{mm}}{\text{mm}} - 0} = 75 \times 10^9 \text{ Pa. } \textcircled{3}$$

$$\text{The ultimate stress, } \sigma_{ult} = 635 \text{ MPa. } \textcircled{1}$$

$$\text{The fracture stress, } \sigma_{fracture} = 570 \text{ MPa. } \textcircled{1}$$

using 0.2% offset method, the line parallel to the initial straight line of the stress-strain diagram starting from $\epsilon = 0.002 \frac{\text{mm}}{\text{mm}}$ as shown in the diagram. The intersection point on the curve represents the yield strength which is, $\sigma_{ys} = 515 \text{ MPa. } \textcircled{3}$

$$\text{When the specimen is stressed to } 400 \text{ MPa} \Rightarrow \epsilon = 0.005333 \frac{\text{mm}}{\text{mm}} \textcircled{2}$$

using the modulus of elasticity.

$$\begin{aligned} \text{- New length of the specimen} &= 300 \text{ mm} + (0.005333 \frac{\text{mm}}{\text{mm}} \times 300 \text{ mm}) \\ &= 301.600 \text{ mm. } \textcircled{2} \end{aligned}$$

$$\begin{aligned} \text{- New diameter of the specimen} &= 25 \text{ mm} - (0.35 \times 0.005333 \times 25 \text{ mm}) \\ &= 24.953 \text{ mm. } \textcircled{2} \end{aligned}$$

d) When the specimen is stressed to 600 MPa and then unloaded.

①

At 600 MPa \Rightarrow the strain, $\epsilon = 0.0185 \frac{\text{mm}}{\text{mm}}$

We draw straight line BC from B which is parallel to the straight portion of the curve (elastic portion).

From the triangle CBD:

$$E = \frac{BD}{CD} \Rightarrow CD = \frac{600 \times 10^6 \text{ Pa}}{75 \times 10^9 \text{ Pa}} = 0.008 \frac{\text{mm}}{\text{mm}}$$

This represents the recovered elastic strain.

②

$$\therefore \text{The permanent strain} = \epsilon_{\text{perm}} = \epsilon - \frac{CD}{CD} = 0.0185 - 0.008 \\ = 0.0105 \frac{\text{mm}}{\text{mm}}$$

\therefore The final length of the specimen = $L_0 + (\epsilon_{\text{perm}} * L_0)$

$$= 300 \text{ mm} + (0.0105 \frac{\text{mm}}{\text{mm}}) \cdot (300 \text{ mm})$$

$$= \underline{303.15 \text{ mm.}}$$

①

- 4) In a tensile test of a bar with rectangular cross section 200 mm \times 300 mm, the axial force at the proportional limit is 1200 kN. The 900-mm gage length is observed to increase by 0.45 mm, and the 300-mm dimension decreases by 0.015 mm. Calculate

- the proportional limit,
- the modulus of elasticity,
- Poisson's ratio,
- the new value of the 200-mm dimension.

[Sects. 3.1 - 3.4; 3.6] (15 pts.)

- 5) In Fig. P5 shown, determine the displacement of point E.

[Sects. 4.1-4.3 (Introd.)] (15 pts.)


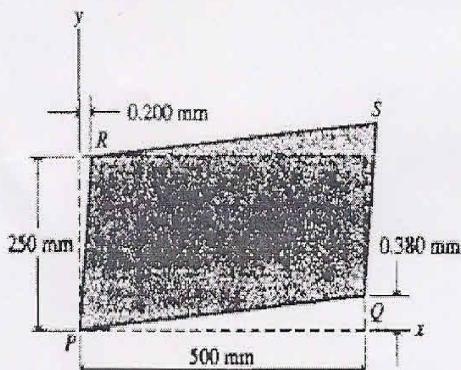


Fig. P2

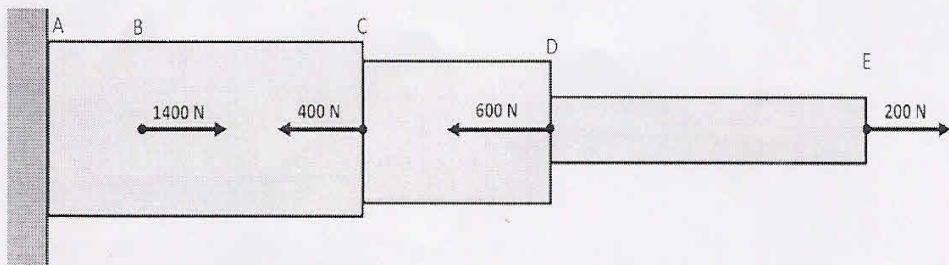

Member	Properties		
	L (m)	A (mm^2)	E (GPa)
AB	0.5	50	250
BC	1.5	50	250
CD	2	32	400
DE	3	10	600


Fig. P5

Solution of HW #3

Problem #5:

Given:

The figure shown

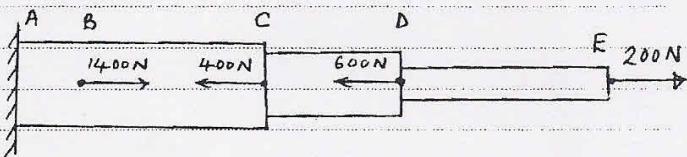

Required:

The displacement of E

Solution:


The displacement of point E is the total elongation (+ or -) of all Members/segments as point A is fixed. \Rightarrow

$$\delta_E = \sum \epsilon = \sum \left(\frac{PL}{AE} \right) = \left(\frac{PL}{AE} \right)_{AB} + \left(\frac{PL}{AE} \right)_{BC} + \left(\frac{PL}{AE} \right)_{CD} + \left(\frac{PL}{AE} \right)_{DE}$$


L, A, and E are given in the table for all.

We need to determine P for each. We get it from the FBD as it is internal. Thus:

$$P_{DE} = +200N \quad "T"$$




$$P_{CD} = -400N \quad "C"$$




(Be Careful about Signs!! Compression is (-).)

$$P_{BC} = -800N \quad "C"$$

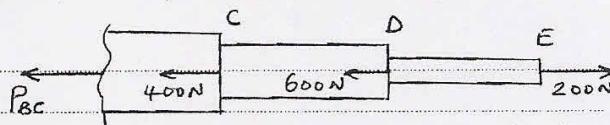

$$P_{AB} = +600N \quad "T"$$



$$\Rightarrow \delta_E = \left[\frac{600(0.5)}{50(10)^{-6}(250)(10)^3} + \frac{-800(1.5)}{50(10)^{-6}(250)(10)^3} + \frac{-400(2)}{32(10)^{-6}(400)(10)^3} + \frac{200(3)}{10(10)^{-6}(600)(10)^3} \right]$$

$$\Rightarrow \delta_E = -3.45(10)^{-5}m = -0.0345\text{ mm}$$

(- means moved to the left.)

4-15. The assembly consists of three titanium rods and a rigid bar AC . The cross-sectional area of each rod is given in the figure. If a vertical force $P = 20 \text{ kN}$ is applied to the ring F , determine the vertical displacement of point F .

$$E_{\text{ti}} = 350 \text{ GPa.}$$

$$\delta_A = \frac{PL}{AE} = \frac{12(10^3)(2000)}{(60)(10^{-6})(350)(10^9)} = 1.1429 \text{ mm}$$

$$\delta_C = \frac{PL}{AE} = \frac{8(10^3)(2000)}{45(10^{-6})(350)(10^9)} = 1.0159 \text{ mm}$$


$$\delta_{F/E} = \frac{PL}{AE} = \frac{20(10^3)(1500)}{75(10^{-6})(350)(10^9)} = 1.1429 \text{ mm}$$

$$\delta_E = 1.0159 + \frac{0.75}{1.25}(0.1270) = 1.092 \text{ mm}$$




$$\delta_F = \delta_E + \delta_{F/E}$$

$$= 1.092 + 1.1429$$

$$= 2.23 \text{ mm} \quad \text{Ans}$$

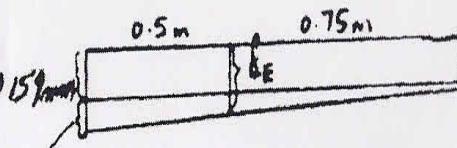

$$1.1429 - 1.0159 = 0.1270 \text{ mm}$$

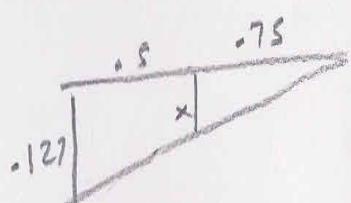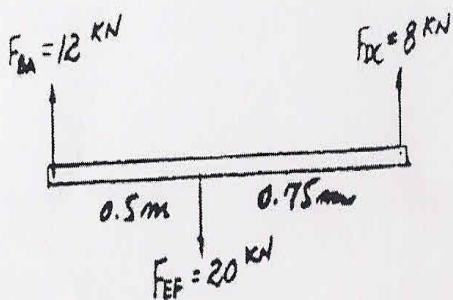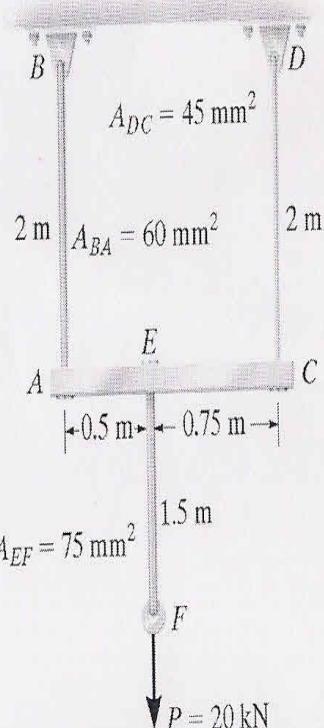

$$\frac{-127}{1.25} = \frac{x}{0.75}$$

4-63. The rigid bar is supported by the two short white spruce wooden posts and a spring. If each of the posts has an unloaded length of 1 m and a cross-sectional area of 600 mm^2 , and the spring has a stiffness of $k = 2 \text{ MN/m}$ and an unstretched length of 1.02 m, determine the force in each post after the load is applied to the bar.

Equations of Equilibrium :

$$(+\downarrow \sum M_C = 0; \quad F_B(1) - F_A(1) = 0 \quad F_A = F_B = F)$$

$$+\uparrow \sum F_y = 0; \quad 2F + F_{sp} - 100(10^3) = 0 \quad [1]$$

Compatibility :

$$\begin{aligned} (+\downarrow) \quad & \delta_A + 0.02 = \delta_{sp} \\ \frac{F(1)}{600(10^{-6})9.65(10^9)} + 0.02 &= \frac{F_{sp}}{2.0(10^6)} \\ 0.1727F + 20(10^3) &= 0.5F_{sp} \end{aligned} \quad [2]$$

Solving Eqs. [1] and [2] yields :

$$F_A = F_B = F = 25581.7 \text{ N} = 25.6 \text{ kN} \quad \text{Ans}$$

$$F_{sp} = 48836.5 \text{ N}$$

