King Fahd University of **Petroleum & Minerals Computer Engineering Dept**

COE 543 - Mobile and Wireless

Networks

Term 061

Dr. Ashraf S. Hasan Mahmoud

Rm 22-148-3

Ext. 1724

Email: ashraf@ccse.kfupm.edu.sa Dr. Ashraf S. Hasan Mahmoud

Lecture Contents

12/4/2006

Dr. Ashraf S. Hasan Mahmoud

Main References



Charles E. Perkins, "Mobile IP," IEEE Communications Magazine, May 1997, pp. 84-99.

- Notes for Prof. İbrahim Körpeoğlu of Bilkent University Bilkent / ANKARA
- Prof. Dr.-Ing. Jochen Schiller, http://www.jochenschiller.de/ MC SS02 – Chapter 8 material
- Charles E. Perkins, "Mobile IP Design Principles and Practices," Addison-Wesley, 1997

12/4/2006

Dr. Ashraf S. Hasan Mahmoud

3

Background Information

- Internet
- TCP/IP
- Subnet-ing
- ICMP
- ARP
- DHCP

12/4/2006

Dr. Ashraf S. Hasan Mahmoud

,

Introduction

- Mobility vs. Portability
- DHCP requirements
- Other solutions
 - E.g. TCP connection migration

12/4/2006

Dr. Ashraf S. Hasan Mahmoud

5



Motivation for Mobile IP

Routing

- □ based on IP destination address, network prefix (e.g. 129.13.42) determines physical subnet
- change of physical subnet implies change of IP address to have a topological correct address (standard IP) or needs special entries in the routing tables

Specific routes to end-systems?

- change of all routing table entries to forward packets to the right destination
- does not scale with the number of mobile hosts and frequent changes in the location, security problems

Changing the IP-address?

- adjust the host IP address depending on the current location
- almost impossible to find a mobile system, DNS updates take to long time
- □ TCP connections break, security problems

Prof. Dr.-Ing. Jochen Schiller, http://www.jochenschiller.de/

MC SS02

8.6



Requirements to Mobile IP (RFC 3220, was: 2002)

Transparency

- □ mobile end-systems keep their IP address
- continuation of communication after interruption of link possible
- point of connection to the fixed network can be changed

Compatibility

- □ support of the same layer 2 protocols as IP
- no changes to current end-systems and routers required
- □ mobile end-systems can communicate with fixed systems

Security

authentication of all registration messages

Efficiency and scalability


- only little additional messages to the mobile system required (connection typically via a low bandwidth radio link)
- world-wide support of a large number of mobile systems in the whole Internet

Prof. Dr.-Ing. Jochen Schiller, http://www.jochenschiller.de/

MC SS02

8.7



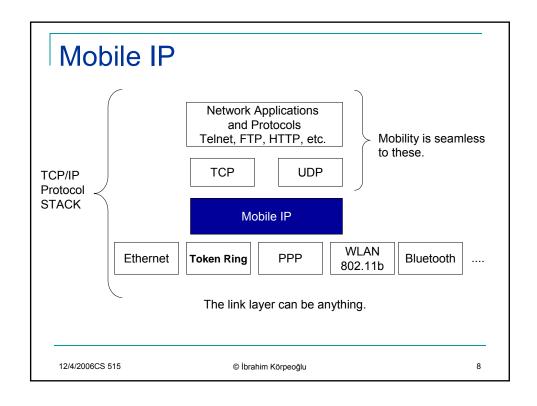

Why we need mobile IP

- Current Internet architecture and protocols (without mobile IP support) do not support seamless mobility for mobile users
 - Internet is designed assuming hosts (computer) are static and do not change location frequently.
 - When you move to a new location with your laptop and connect it to a Ethenet cable at the new location, you have <u>re-configure</u> your laptop.
 - Obtain new IP address,
 - · Learn the subnet mask.
 - Learn the deafult router IP address
 - Learn the local DNS servers IP addresses
 - When you re-configure your laptop with this information, most of the time you have re-start your laptop.
 - Whether you re-start or not your laptop, previously running network applications will stop working properly when you change the IP address of your laptop.

12/4/2006CS 515

© İbrahim Körpeoğlu

9

Why wee need mobile IP

- Initially we had desktops, workstations, main-frames and super-computer all of whic are static and heavy enough so that you can not carry them with you!.
 - Initial design of Internet was for these computers.
- Now, we have
 - <u>Laptop and handheld computers</u> which you carry to new places when you travel
 - Palmtop and Pocket PC computers which you carry in your pocket even if you go to a movie.
 - And these are powerful enough to run a lof interesting network applications like web browsers, etc.
 - Hence you still need Internet access for these highly mobile computers and devices
 - That is why wee need mobility support to be added to the Internet.
 - Mobile IP has been designed for this purpose!

12/4/2006CS 515

© İbrahim Körpeoğlu

Problems with Internet for Mobility

- In Internet, IP addreses are used for two purposes
 - Identification of hosts
 - Both an <u>IP address</u> or <u>domain name address</u> (FQDN) can be used to identify a host.
 - DNS servers does the mapping between IP addresses and domain names
 - Usually there is one to one mapping.
 - Network protocol in TCP/IP stack usually use IP addresses to identify the end-point
 - Applications may use the domain names so that they are more user friendly to the humans.
 - Locating mobile hosts: for Routing
 - IP addresses are structured and correspond to wellspecific locations in Internet.
 - They are used for determining the routes that packets will follow from a source machine to a destination machine.
 - For static hosts, we can use its IP address for very long times, since the location dependent IP address does not have to be changed since a static host do not change location.

12/4/2006CS 515

Problems with Internet for Mobility

- When mobile hosts come into picture in Internet:
 - We need a location-independent identifier for the mobile hosts so that any user who wants to contact to the mobile host should be able to use this identifier to send information to the mobile host without getting bothered with the current location of the mobile.
 - We also need a new location-dependent IP address (all IP addresses are location-dependent) for a mobile host when it moves to a new location in order to route the packets destined for the mobile to the new location so that the mobile can receive them at the new location.
- Hence, a single IP address for the a mobile host can not serve both purposes (identity and location/routing) at the same time.

12/4/2006CS 515 © İbrahim Körpeoğlu

6

Mobile IP Approach

- Use two IP addresses per mobile host
 - One permanent IP address (also called home-address) Used for Identification
 - An other IP address that is changing depending on the current location the mobile host (called care-of-address) Used for Routing
- The binding (association) between these two IP addresses are kept at a well-known location, called home agent.

12/4/2006CS 515

© İbrahim Körpeoğlu

13

Why DHCP is not enough

- DHCP: Dynamic Host Configuration Protocol
 - An Internet Protocol that allows host that does not have an IP address to obtain an IP address and other configuration information when it connects to a network at a new location.
 - Network to be connected can be for example an Ethernet link
 - Network to be connected should support DHCP protocol
 - The mobile host should support DHCP protocol
 - The configuration info that can be obtained via DHCP at the new location includes:
 - A registered IP address
 - Subnet mask of the network

12/4/2006CS 515 • Local DNS serveral madelinesses (primary and secondary4

DHCP does not provide seamless mobility

- Since you obtain a new IP address a every new location, applications has to be restarted
 - Restart is not problem for web page access
 - Restart is problem for telnet and ftp sessions and some other network and TCP applications.
- Other people can not connect to you when you move to a new location unless they learn your new IP address
 - You have to call them and let your IP address at every move!!!
 - DNS servers are not dynamic enough currently to update the <u>binding</u> between your machine's domain name (host name) and its IP address. This binding will be stale when you move to a new location. Your friend who wants to contact to you and uses your machine's host name, will have the old IP address returned from the DNS server. Hence the packets (messages) he will sent will be routed to your old IP address.

12/4/2006CS 515 © İbrahim Körpeoğlu 15



Terminology

refer to Perkins's paper for the full list of definitions

Mobile Node (MN)

 system (node) that can change the point of connection to the network without changing its IP address



- system in the home network of the MN, typically a router
- registers the location of the MN, tunnels IP datagrams to the COA

Foreign Agent (FA)

- □ system in the current foreign network of the MN, typically a router
- forwards the tunneled datagrams to the MN, typically also the default router for the MN

Care-of Address (COA)

- □ address of the current tunnel end-point for the MN (at FA or MN)
- actual location of the MN from an IP point of view
- □ can be chosen, e.g., via DHCP

Correspondent Node (CN)


□ communication partner


Prof. Dr.-Ing. Jochen Schiller, http://www.jochenschiller.de/


MC SS02


8.16



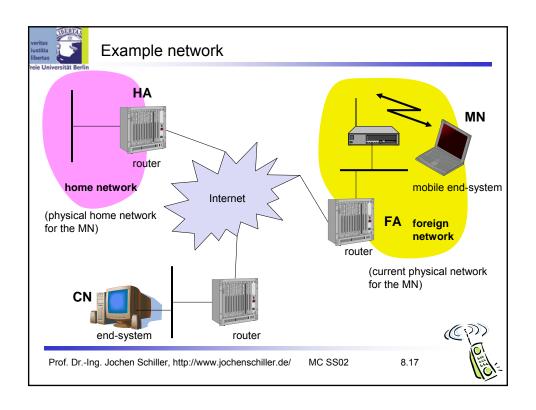

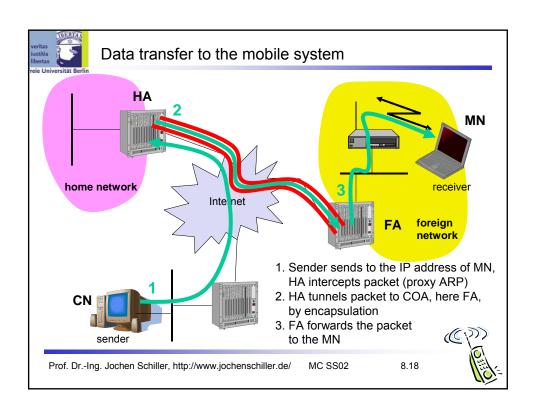

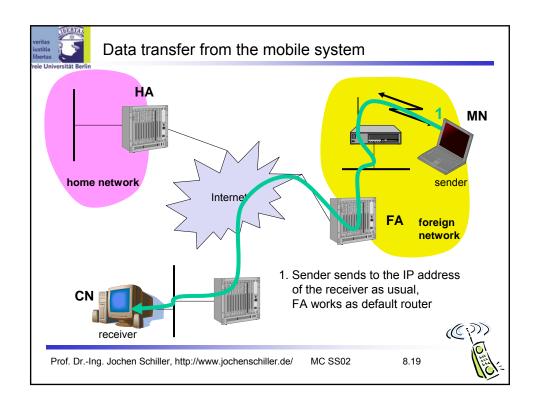

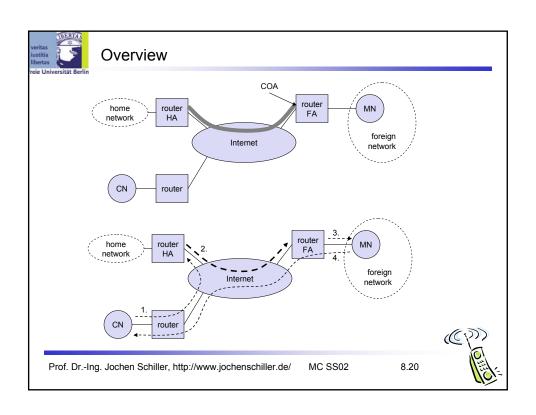

Example

- A correspondent host C wants to send an IP packet to a mobile host M.
 - It generated the IP packet so that the IP packet has destination address equal to mobile's home address
 - The IP packet is send to the mobile's home address
 - Routers forward the packet using normal Internet routing mechanisms to the home network of the mobile.
 - Assume mobile is away from home network and currenty is located in a foreign network. Hence mobile will not be able to receive (capture) the packet that is sent to the mobile's home network.
 - A home agent located in the mobile's home network will intercept the packet aimed for mobile
 - □ This interception is done with the help of proxy ARPing.
 - Home agent will know the whereabouts of the mobile, if the mobile has registered with the home agent previously.

12/4/2006CS 515

© İbrahim Körpeoğlu


21


Example – continued.

- Home agent will encapsulate the IP packet using IP-IP encapsulation (tunneling) method and will send the encapsulated IP packet to the new location (care-of-address) of the mobile. The new location is the foreign network that the mobile currently resides in.
- The encapsulated IP packet will be transported to the care-of-address of the mobile using normal Internet routing mechanisms.
 - Care-of-address can be the <u>IP address of a foreign agent</u> or <u>the new IP address of the mobile</u> at thew new location obtained via methods like DHCP, etc. In this case the foreign agent could be co-located at the mobile host.
- The holder of the care-of-address (a foreign agent) will receive the encapsulated IP datagram, wil strip off the outer header (decapsulate) and will forward the original IP packet to the mobile host.
- The mobile host will receive the packet as it is coming from a correspondent host directly without going through the home agent (if foreign agent functionality is not co-located at the mobile host).

12/4/2006CS 515

© İbrahim Körpeoğlu

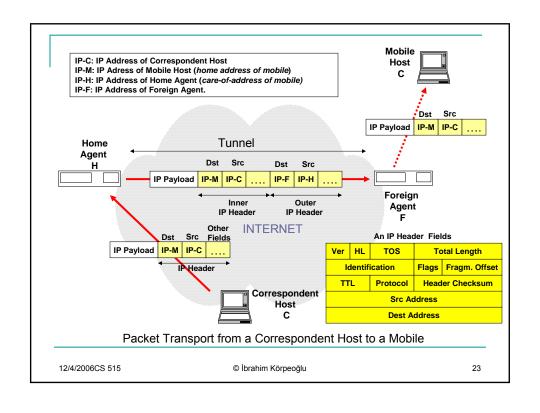

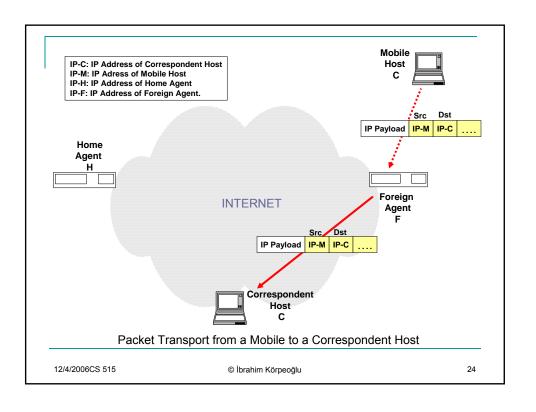

Mobile IP Functions

- Agent Discovery using extension to ICMP
 - When a mobile node moves into a new subnetwork (or network), It has to discover the foreign agent in that network
 - For this, mobile agents (home and foreign) advertise their presence periodically using ICMP messages.
- Registration using UDP
 - When a mobile moves to a new network and obtains a new care-ofaddress there, it has to register that address with the home agent (binding), so that home agent knows where to forward the packets aimed for mobile.
 - · Registration should be secure
- Tunneling
 - When packet aimed for mobile are intercepted by home agent, they are forward to the current location (care-of-address) of the mobile using a mechanism called Tunneling
 - There are various forms of tunneling: IP-IP, Minimum Encapsulation, GRE, etc.

12/4/2006CS 515

© İbrahim Körpeoğlu

25

Mobile Agent Discovery

- How a mobile node discovers the home and foreign agents when it travels?
- Agents periodically broadcast their presence (advertisement) on a link (a wireless link – 802.11, or a wired link – ethernet)
 - These broadcasts are agent advertisement messages.
- A mobile node receiving the advertisement understand from the IP addresses included in the advertisement:
 - Whether it is in the home network or not?
 - Whether it has moved to new location or not.
 - This understanding is at the IP level
 - (A mobile already knows that it has moved at the physical link level if has moved).

12/4/2006CS 515

© İbrahim Körpeoğlu

Mobile Agent Discovery

- An agent advertisement message is an ICMP router advertisement message with special extension.
- Original router discovery protocol (ICMP) is specified by RFC 1256
- The special extension is called <u>Mobility Agent</u> Extension.
- •No Authentication is required!! Why?
- •A mobile node may also solicit a mobile agent discovery message
- Why?
 - Allow detection of mobility agents
 - Lists one or more care-of-address
 - Informs mobile node of special features of that mobility agent

2/4/2000C-5-313 ©TDFaffillT Korpeoglu 2/1

Router Discovery Protocols - background

- Original router discovery protocol (ICMP) is specified by RFC 1256
- <u>Type</u>: 9
- <u>Code</u>: 0
- Checksum:
- Num addrs: the number of router addresses advertised in this message
- Addr entry size: the number of 32-bit words of info for each router address (typically 2)
- <u>Lifetime</u>: the maximum number of seconds that the router addresses may be considered valid
- Router address(i): i=1...num addrs, the sending router's IP addresses on the interface from which this message is sent
- <u>Preference level(i)</u>: i=1..num addrs, the preferability of each corresponding router address as a default router address relative to other router addresses on the same subnet

0 8 16				
Туре	Code	Checksum		
Num addrs	Addr entry size	Lifetime		
Router address (1)				
Preference level (1)				


Router Advertisements (From RFC 1256)

12/4/2006

Dr. Ashraf S. Hasan Mahmoud

Router Discovery Protocols - background


- Router solicitation when a host needs a timely information
- Type: 10
- <u>Code</u>: 0
- Checksum:
- Reserved: sent as 0 ignored on reception



Router Solicitations (From RFC 1256)


12/4/2006

Dr. Ashraf S. Hasan Mahmoud

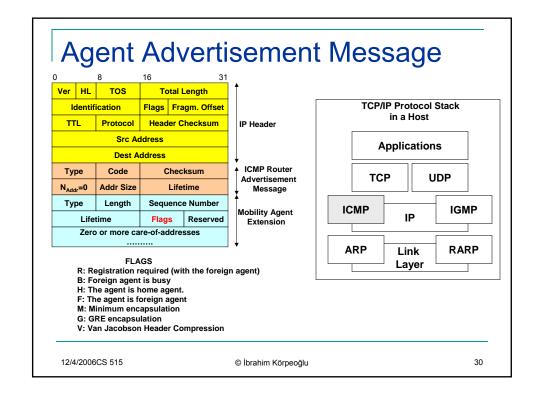

Mobility Agent Advertisement Extensions

- <u>Type</u>: 16
- Length: (6+4*N), where N is the # of care-of addresses advertised
- <u>Sequence number</u>: the count of agent advertisement messages sent since the agent was initialized
- <u>Registration lifetime</u>: the longest lifetime (measured in seconds) that this agent is willing to access in any registration request; 65535 indicates infinity
- R, B, H, F, M, G, V: see previous slide
- <u>Care-of address</u>: The advertised foreign agent care-of address provided by this foreign agent. An agent advertisement is required to include at least one care-of address if the F bit is set.



Mobility Agent Advertisement Extension

12/4/2006

Dr. Ashraf S. Hasan Mahmoud

31

Registration

Once the mobile node obtains its care-of-address it has to **REGISTER** with the home mobile agent

- After a mobile detects at the IP (ICMP) layer that it has moved to a new location, it starts registration procedure with the home agent.
 - The aim of the registration is to let the home agent know mobile's current care-of-address. Mobile obtains this care-of-address ether from the foreign agent or from a server like DHCP server.
- Registration procedure consists of sending a <u>Registration</u> <u>Request</u> Message from mobile to home agent and a <u>Registration</u> <u>Reply</u> Message from home agent to mobile
- Registration messages has to go through Foreign agent.
 - □ Foreign Agent just forwards these registration messages back and forth
 - Foreign agent is a passive entity in registration.
- Registration messages sent over UDP to port number 434.

12/4/2006CS 515

© İbrahim Körpeoğlu

Registration Objectives


- Request forwarding services when visiting a foreign network
- Inform their home agent of their current COA
- Renew a binding that is due to expire
- De-register when they return home
- Discover the address of the home agent if the mobile node is not configured with this info
- Select certain alternative tunneling protocols (minimal encapsulations or GRE) - Required of the use of Van Jacobson header compression
- Maintain multiple simultaneous registration so that a copy of each datagram will be tunneled to each active COA
- De-register certain COAs while retaining others

12/4/2006 Dr. Ashraf S. Hasan Mahmoud 33

Registration Packet

IP header fields	UDP header	Mobile IP message header	Extensions		
C IMIT TO D I I I I M					


General Mobile IP Registration Message

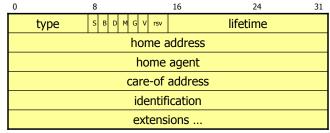


Registration request packet format

12/4/2006 Dr. Ashraf S. Hasan Mahmoud

34

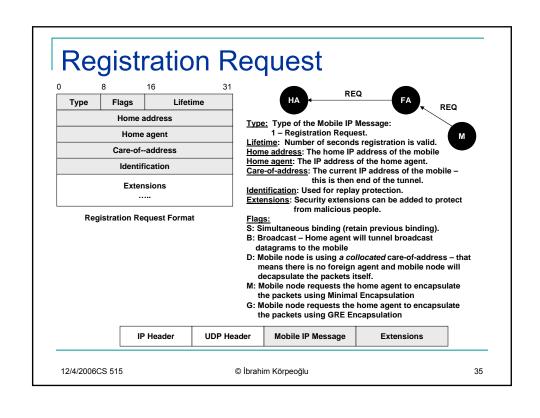

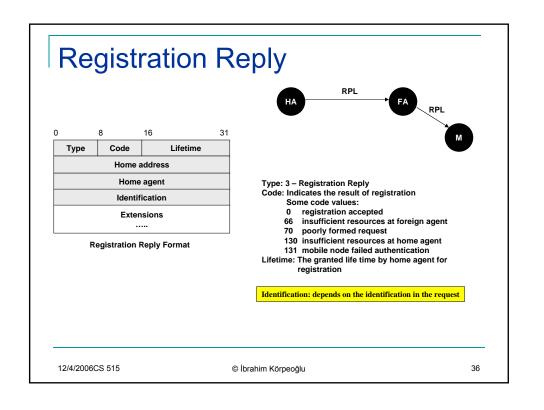


Care-of-Address Types

- Normal Care-of-address
 - The care-of-address that mobile obtains at a new location is the IP address of a foreign agent serving at that new location.
 - Registration and communication has to go through foreign agent
- Collocated care-of-address
 - There is no separate foreign agent present at the new location
 - Mobile obtains an IP at the new location through some standard mechanisms like DHCP.
 - This IP address is called collocated IP address.
 - The foreign agent functionality is executed at the mobile node itself.
 - The mobile node decapsulates the tunneled packets coming from home agent.
 - Registration and communication is done directly between mobile and home agent.

12/4/2006CS 515

© İbrahim Körpeoğlu

37

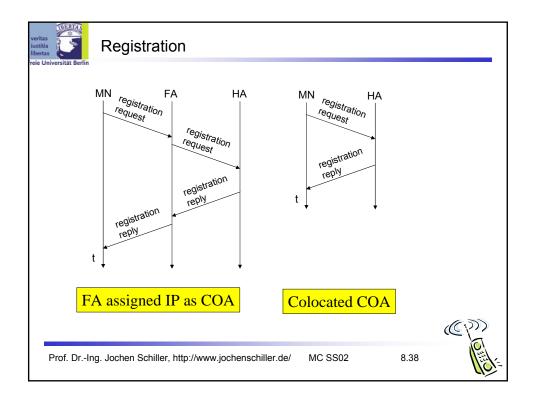

Securing the registration procedure

- Security problem
 - Fraudulent registrations should be detected.
 - A bad person can send registration packets to home agent as if the packets are coming from a legitimate mobile user.
 - In this way, the bad user can redirect the traffic destined to mobile node to itself and obtain the packets.
 - Hence we need authentication
- There are three authentication extensions defined for Mobile IP
 - The mobile-home authentication extension
 - The mobile-foreign authentication extension
 - The foreign-home authentication extension.

12/4/2006CS 515

© İbrahim Körpeoğlu

39


Authentication Overview

- Mobility Security Association = SPI + IP
 - Security Parameter Index (SPI)
 - For mobile node, IP = home address not COA

12/4/2006

Dr. Ashraf S. Hasan Mahmoud

Securing the registration procedure



Mobile IP Authentication Extension Added to the Registration Request Message Type: 32 – Mobile-Home authentication extension 33 – Mobile-Foreign authentication extension 34 – Foreign-Home authentication extension

SPI: Security Parameter Index. Defines the security context (algorithm, mode, key) to compute the authenticator.

Authenticator: variable length.

What are the potential dangers? What are "replay" attacks?

Default Authentication Algorithm:

Keyed-MD5 in prefix-suffix mode

128 bit authenticator: message digest of the registration message. Computed over:

shared secret key,

spi index,

protected fields of registration message,

shared secret again.

12/4/2006CS 515

© İbrahim Körpeoğlu

41

Example 1: (section 4.11 of book)

Mobile node IP home address	129.34.78.5
Mobile node's home agent	129.34.78.254
Foreign agent's wireless address	137.0.0.11
Foreign agent coa	9.2.20.11
DHCP-allocated coa	9.2.43.94
Mobile node's source port	1094
Foreign agent's source port	1105
coa registration lifetime	60,000 sec
Home agent granted lifetime	35,000 sec

12/4/2006

Dr. Ashraf S. Hasan Mahmoud

Example 1: (section 4.11 of book)- 2

Agent Advertisement

IP header fields	ICMP header	Router Adv. fields	Mobile Service Extension
S = 137.0.0.11 D = 255.255.255.255 F - 1	Type = 9 Code 16		Lifetime = 60,000 COA = 9.2.20.11

Mobile → Foreign Agent

IP header fields	UDP header	Mobile IP msg fields	Authentication Ext.
S = 129.34.78.5 D = 137.0.0.11 TTL = 1	S = 1094 D = 434	Type = 1 Lifetime = 60,000 COA = 9.2.20.11 HA = 129.34.78.254 MA = 129.34.78.5	SPI = 302
12/4/2006	Dr. Ashraf S	S. Hasan Mahmoud	43

Example 1: (section 4.11 of book)- 3

<u>Foreign Agent</u> → <u>Home</u>

$\begin{array}{lll} S = 9.2.20.11 & S = 1105 & Type = 1 & SPI = 302 \\ D = 129.34.78.254 & D = 434 & Lifetime = 60,000 \\ TTL = 64 & COA = 9.2.20.11 & \\ \end{array}$		IP header fields	UDP header	Mobile IP msg fields	Authentication Ext.
HA = 129.34.78.254 MA = 129.34.78.5 Home → Foreign Agent	,	D = 129.34.78.254 TTL = 64	D = 434	Lifetime = 60,000 COA = 9.2.20.11 HA = 129.34.78.254	SPI = 302

Home → Foreign Agent

IP header fields	UDP header	Mobile IP msg fields	Authentication Ext.
S = 129.34.78.254 D = 9.2.20.11 TTL = 64	S = 434 D = 1105	Type = 3 Lifetime = 35,000 HA = 129.34.78.254 MA = 129.34.78.5	SPI = 303

12/4/2006 Dr. Ashraf S. Hasan Mahmoud

Example 1: (section 4.11 of book)- 4

Foreign Agent → Mobile

IP header fields	UDP header	Mobile IP msg fields	Authentication Ext.
S = 137.0.0.11 D = 129.34.78.5 TTL = 1	S = 434 D = 1094	Type = 3 Lifetime = 35,000 HA = 129.34.78.254 MA = 129.34.78.5	SPI = 303

12/4/2006 Dr. Ashraf S. Hasan Mahmoud

Example 2: (section 4.11 of book)

Mobile node IP home address	129.34.78.5
Mobile node's home agent	129.34.78.254
DHCP-allocated coa	9.2.43.94
Mobile node's source port	1094
coa registration lifetime	60,000 sec
Home agent granted lifetime	35,000 sec

Mobile enters a foreign network that contains no foreign agents. The mobile obtains an address from a DHCP server for use as a co-located care-of address. The mobile support minimal encapsulation and GRE.

12/4/2006 Dr. Ashraf S. Hasan Mahmoud

46

Example 2: (section 4.11 of book)- 2

Mobile → **Home Registration Request**

S = 129.34.78.5 S = 1094 Type = 1 SPI = 302 D = 129.34.78.254 D = 434 Lifetime = 665535 TTL = 64 COA = 9.2.43.94 HA = 129.34.78.254 MA = 129.34.78.5 DM G B = 1.1.1.1	IP header fields	UDP header	Mobile IP msg fields	Authentication Ext.
D.M.O.D = 1,1,1,1	D = 129.34.78.254		Lifetime = 665535 COA = 9.2.43.94 HA = 129.34.78.254	SPI = 302

Home → **Mobile Registration Reply**

IP header fields	UDP header	Authentication Ext.	
S = 129.34.78.254 D = 129.34.78.5 TTL = 64	$\begin{array}{ll} S = 434 & Type = 3 \\ D = 1094 & Lifetime = 35000 \\ COA = 9.2.43.94 \\ HA = 129.34.78.254 \\ MA = 129.34.78.5 \end{array}$		SPI = 303
12/4/2006	Dr. Ashraf S. Hasan Mahmoud		47

Example 3: (section 4.11 of book)

Mobile returns home and wishes to de-register all of care-off addresses with its home agent. The care-off address fields are the same as the mobile node's home address, and the requested (and granted) lifetimes are 0.

12/4/2006 Dr. Ashraf S. Hasan Mahmoud

Example 3: (section 4.11 of book)- 2

Agent Advertisement

IP header fields	ICMP header	Router Adv. fields	Mobile Service Extension
S = 129.34.78.254 D = 255.255.255.255	Type = 9 Code 16		no COAs Lifetime = 35000
D = 255.255.255 H = 1	Code 16		Lifetime = 35000

Mobile → Home Agent

IP header fields	UDP header	Mobile IP msg fields	Authentication Ext.
S = 129.34.78.5 D = 129.34.78.254 TTL = 1	S = 1094 D = 434	Type = 1 Lifetime = 0 COA = 129.34.78.5 HA = 129.34.78.254 MA = 129.34.78.5	SPI = 302
12/4/2006	Dr. Ashraf S. Hasan Mahmoud		49

Example 3: (section 4.11 of book)- 2


Home → Mobile

IP header fields	UDP header	Mobile IP msg fields	Authentication Ext.
S = 129.34.78.254 D = 129.34.78.5 TTL = 1	S = 434 D = 1094	Type = 3 Lifetime = 0 COA = 129.34.78.5 HA = 129.34.78.254 MA = 129.34.78.5	SPI = 303

12/4/2006 Dr. Ashraf S. Hasan Mahmoud


Routing and Tunneling


- When a correspondent host sends an IP packet to a mobile (to its home address), packet is routed first to home agent of mobile through normal routing.
- Home agent intercepts the packet and encapsulates it and tunnels it to the care-of-address (tunnel exit point) of the mobile.
 - The encapsulated packet is delivered to the care-of-address using normal routing.
- There are various encapsulation methods:
 - IP-IP Encapsulation
 - Minimal Encapsulation
 - GRE (Generic Routing Encapsulation) Encapsulation.





12/4/2006CS 515


© İbrahim Körpeoğlu

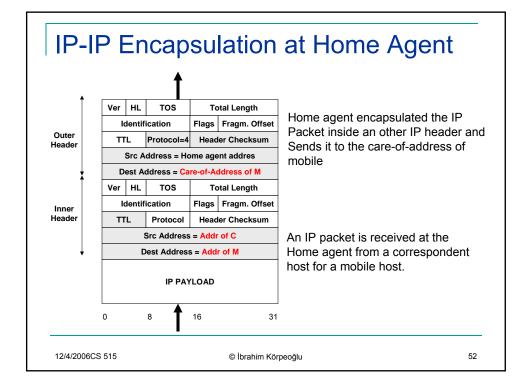

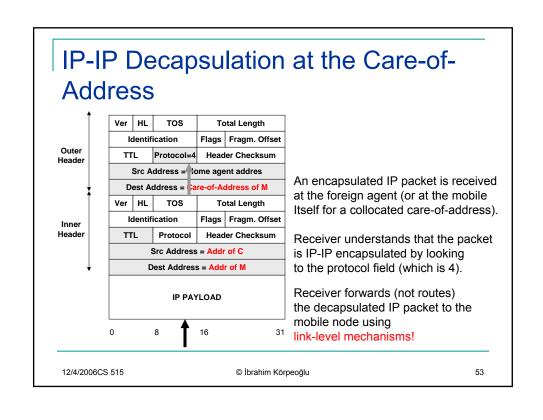

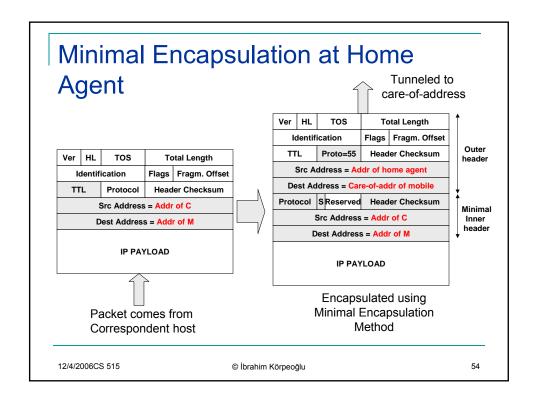

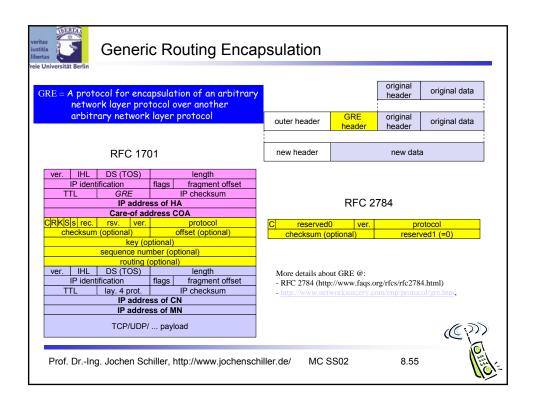


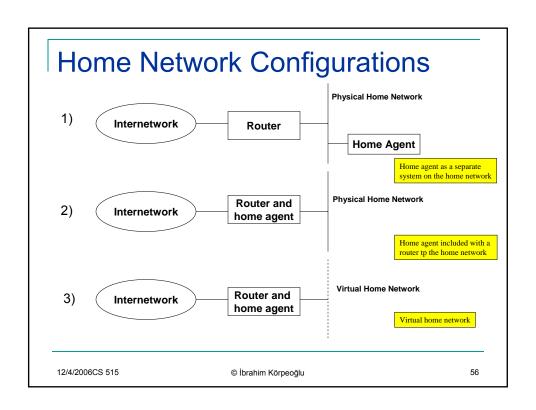



Sending packets between mobile and foreign agent


- When a mobile moves to a new location, a foreign should be broadcasting (IP and link layer broadcast) advertisements on the link (sub-network).
- Mobile will be able to receive this broadcast message and will learn:
 - The IP address of the foreign agent (this will be the care-of-address of the mobile most of the time).
 - The hardware (MAC or link-level address) of the foreign agent.
- When mobile sends a registration packet through this foreign agent, the foreign agent will learn:
 - The home address of the mobile
 - The hardware (MAC or link level) address of the mobile.
 - The registration packet will be sent directly to the foreign agent by using the MAC address of the foreign agent (No need to do ARP request).


12/4/2006CS 515 © İbrahim Körpeoğlu 57

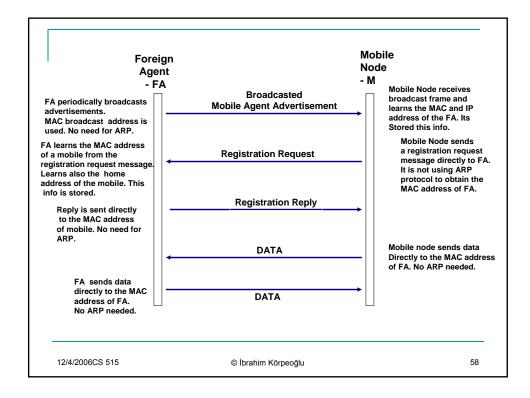

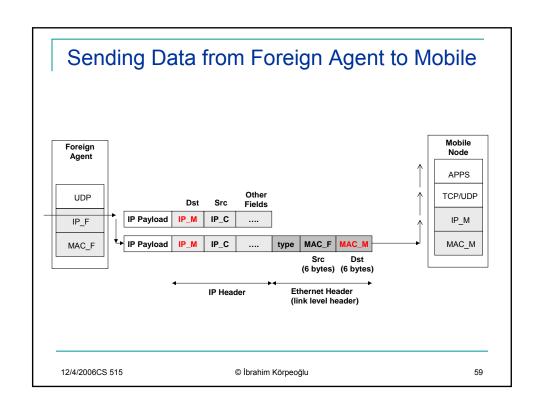

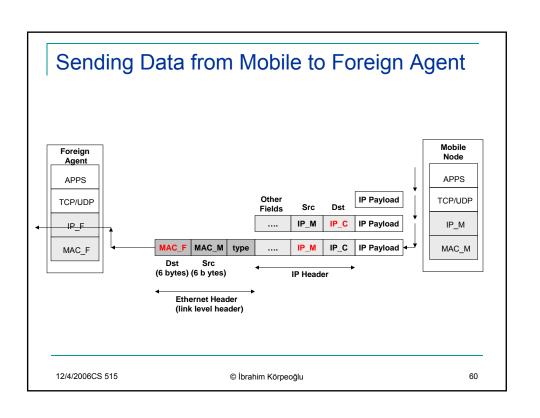

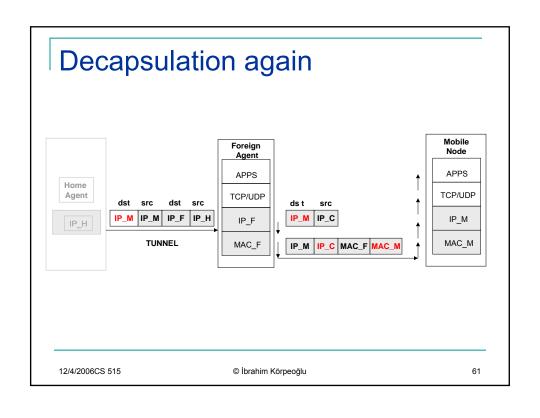

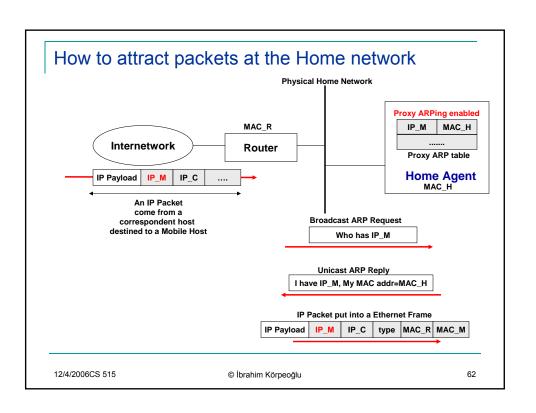



Proxy ARPing


- The packet comes to the last router that the home subnetwork is connected to.
- The router will try ro resolve the IP address of Mobile (IP_M) into the corresponding MAC layer address (Hardware address).
- For this pupose, it will broadcasts an <u>ARP request</u> packet
- Since the mobile is not at home subnet, it will not be able to answer ARP request.
- Home agent will answer instead of the Mobile node. In order to do this, home agent should be configured to do proxy ARPing.
- Home agent replies to the ARP request with an ARP reply, including its MAC address (MAC_H) as the MAC level address corresponding to the IP address of the Mobile.
- The router, upon receiving the ARP reply, will send the IP packet to the MAC address of the home agent.
- In this way, the home agent attracts the IP packets that are destined to the mobile node.


63


12/4/2006CS 515 © İbrahim Körpeoğlu

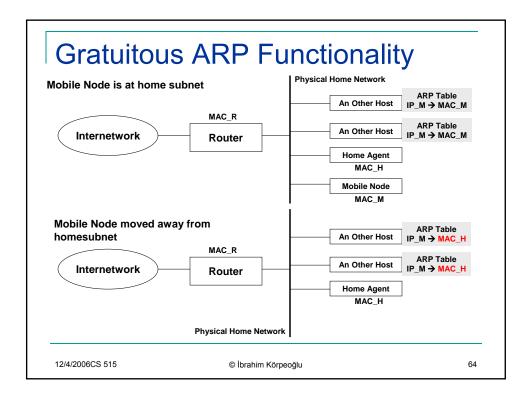

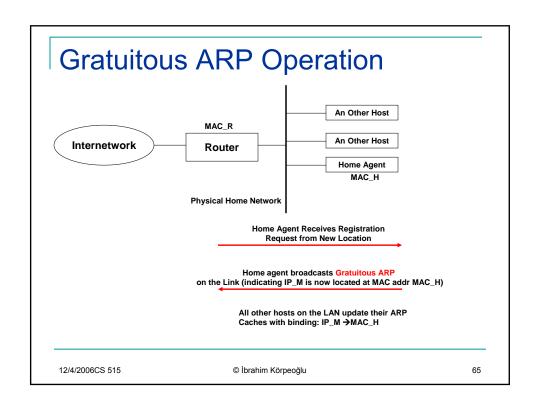


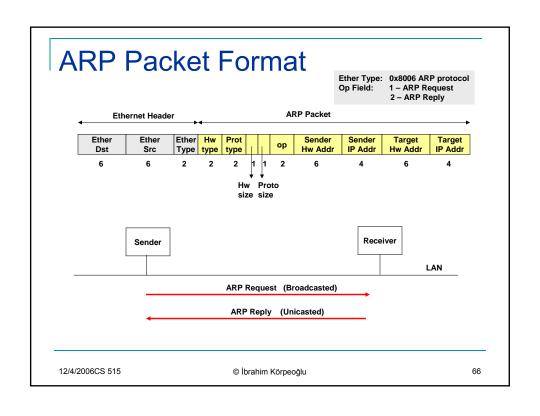

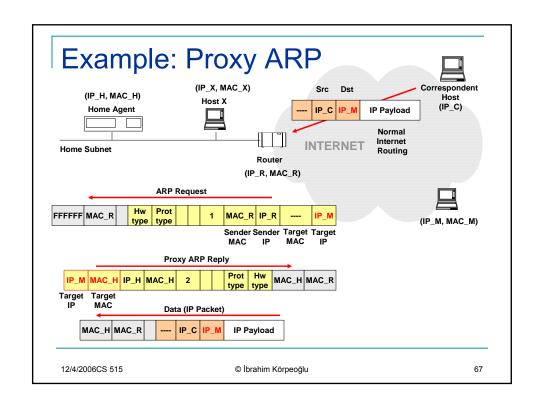

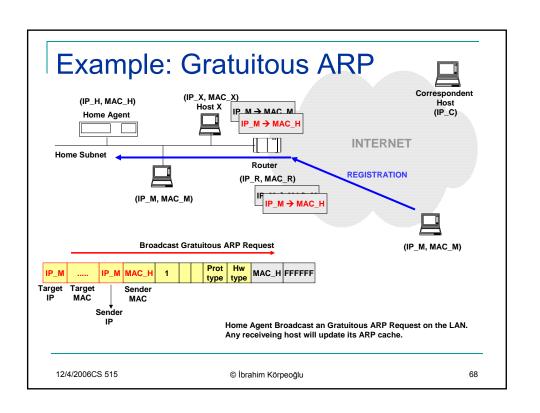

Route Optimization in Mobile IP Dr. Ashraf S. Hasan Mahmoudlbrahim Korpeoglu 69

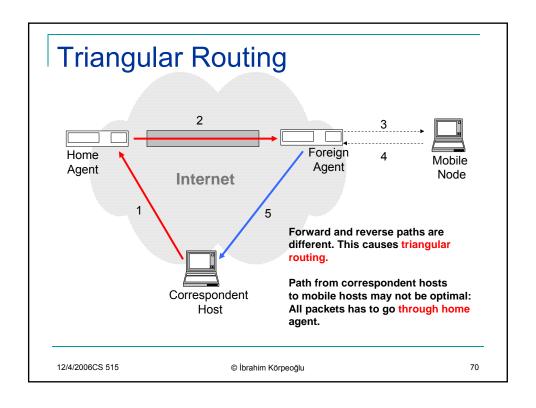

Solution Approach If the COA is a colocated address, the CN sends directly to the mobile host (no FA intervention)

The en/de-capsulation are used and the tunnel ends at the FA

- Let the correspondent hosts know the current mobility binding or just binding (home address \rightarrow care-of-address mapping) for mobile hosts.
 - They will store this binding.
 - They will use this binding to directly send the packets to the current location of the mobile.
 - They will again use encapsulation since the care-ofaddress may not be always collocated at the mobile node (foreign agent should decapsulate).
 - The encapsulated packets will go to the care-of-address directly without going through the home agent.
 - Correspondent hosts should support the binding protocol: Need for modification at correspondent hosts!.

12/4/2006CS 515

© İbrahim Körpeoğlu


71

Binding Update

- How does a correspondent host will learn the current binding for the mobile node?
 - Let the mobile node inform the correspondent host!
 - For example when it receives a packet from a correspondent host
 - Let the home agent inform the correspondent host.
 - This is the method chosen, since it is easier to establish security association between a home agent and a correspondent host (Binding update should be secure so the malicious users can not send binding updates to the corresspondent hosts without authenticating themselves).

12/4/2006CS 515

© İbrahim Körpeoğlu

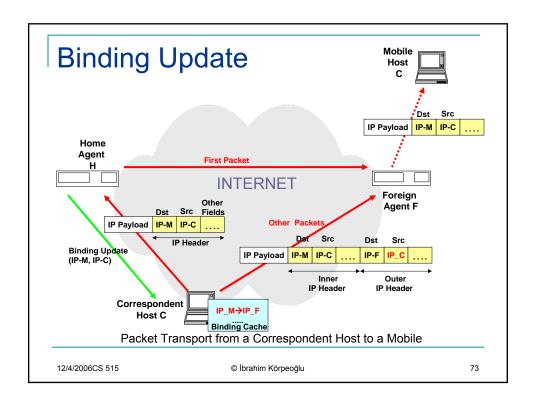



Binding Warning/Request


- A correspondent host may request a binding Update message from Home agent.
 - Correspondent host sends a Binding Request message and waits for a Binding Update Message.
- A mobile node may warn a Home agent (or some other agent) to send a <u>Binding Update</u> message to a particular host (a correspondent host or to some other host).
 - Mobile node sends a Binding Warning message.
 - Binding warning message include the host IP address (called target address field) to where an Update will be sent.
- A host receiving a Binding Update message should send back a Binding Acknowledgement message.
 - The sender of Binding Update may retranmit Binding Update if it did not received a Binding Acknowledgement message. The retransmission should occur after a backoff time.
- All binding messages are sent over UDP.

12/4/2006CS 515

© İbrahim Körpeoğlu

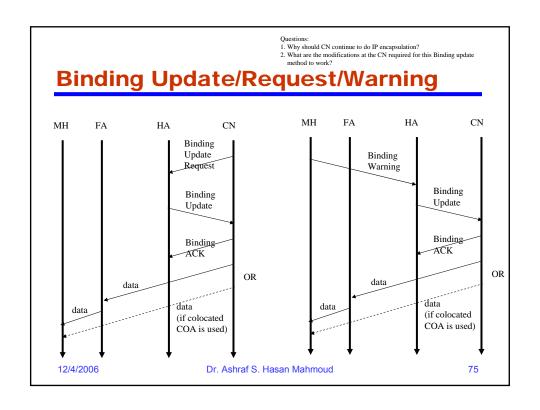

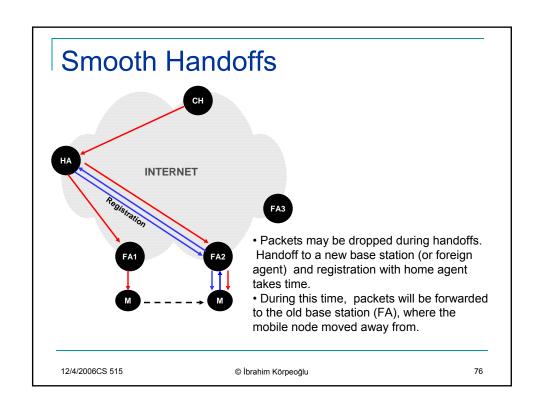

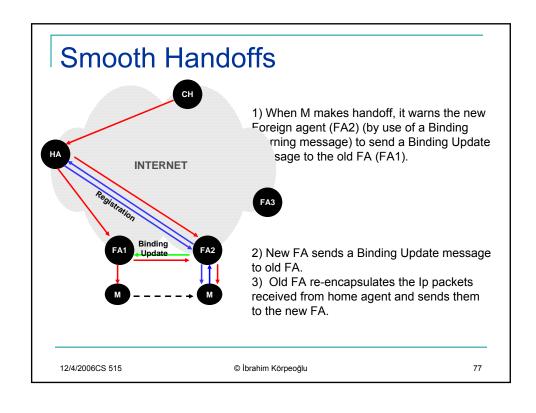

Supporting Fast Handoffs in Mobile IP

12/4/2006

Dr. Ashraf S. Hasan Mahmoudİbrahim Körpeoğlu

Fast Handoffs

- For highly mobile users, handoffs will be too frequent. Implications of this:
 - Handoffs should be very fast in order to minimize <u>packet</u> <u>delays</u> and <u>packet losses</u>.
 - Registration will be too frequent:
 - Registration causes delay
 - Registration causes extra signaling (control) traffic in the wireless link and infrastructure.
- Two solution approaches to support fast handoffs:
 - Use of IP multicasting
 - Use of hierarchical foreign agents.

12/4/2006CS 515

© İbrahim Körpeoğlu


79

Use of IP Multicasting

- A collection of foreign agents in the vicinity of each other join to a multicast group. The group will have a multicast IP address.
- Mobile node will use this <u>multicast IP address</u> as the care-of-address.
- The home agent will send the encapsulated packets for the mobile to this multicast IP address.
- Foreign agents in the multicast group will buffer the received encapsulated IP packets for a while before discarding
 - In this way, when a mobile handoffs from one FA to an other FA (in the same multicast group), it will be able to recover the packets transmitted during handoff from the new FA.

12/4/2006CS 515

© İbrahim Körpeoğlu

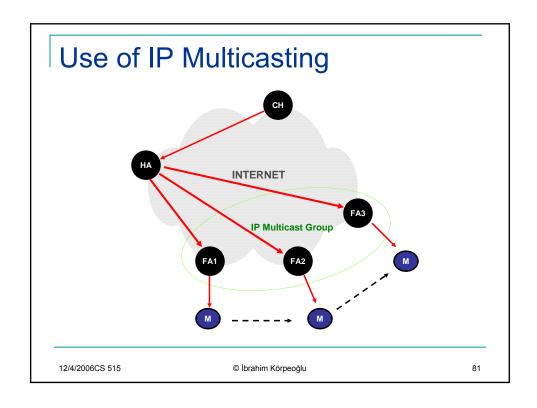


Hierarchical Foreign Agents

- Uses a hierarchy of foreign agents between mobile node and home agent.
- Aims is to localize handoffs and registration.
- The hierarchy could be consisting of for example:
 - Base stations (access points) at the lowest level leaf.
 - Intermediate routers between base stations and campus edge routers in a campus.
 - Campus edge router at the highest level (root) of the foreign agent hierarchy.

12/4/2006CS 515

© İbrahim Körpeoğlu

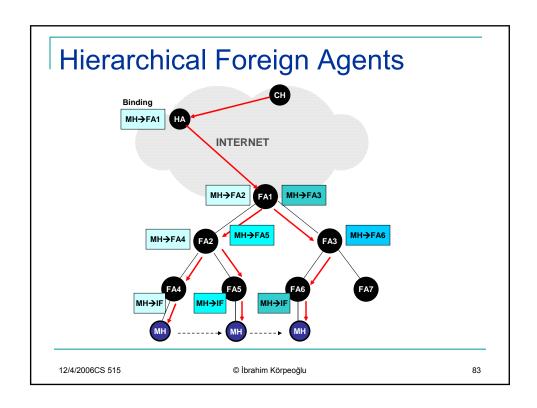



Hierarchical Foreign Agents


- The following functions of Mobile IP is enhanced:
 - Agent Advertisements
 - Registration
 - Data Forwarding

12/4/2006CS 515

© İbrahim Körpeoğlu

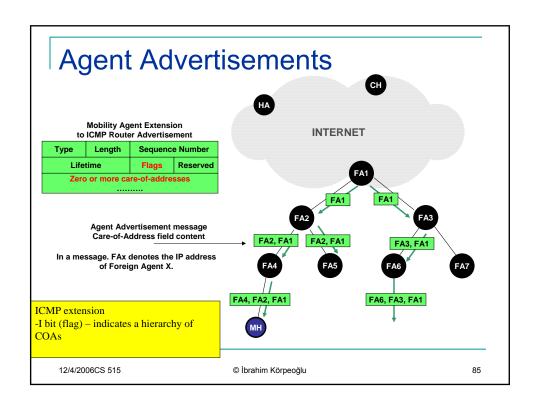

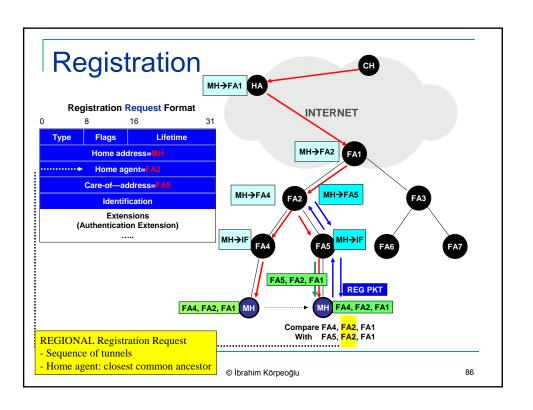

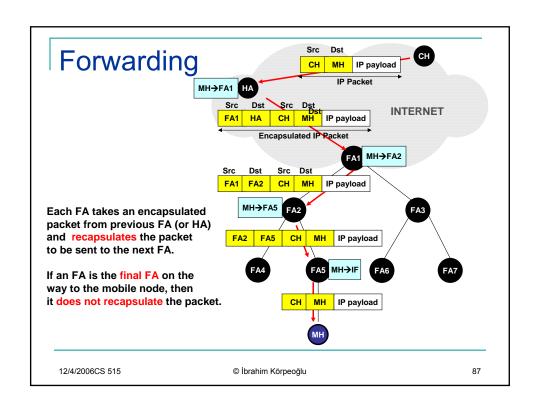

BACKUP SLIDES

12/4/2006

Dr. Ashraf S. Hasan Mahmoud

