

King Fahd University of Petroleum and Minerals  
 College of Computer Sciences and Engineering  
 Department of Computer Engineering

COE 344 – Computer Networks (T171)

**Homework # 04 (due date & time: Tuesday 05/12/2017 during class period)**

**Late homework submission will NOT be accepted**


\*\*\* Show all your work. No credit will be given if work is not shown! \*\*\*

**Problem # 1 (12 points):** Consider a datagram network using IPv4 addresses. Suppose a router has five links, numbered 0 through 4, and datagrams are to be forwarded to the link interfaces as follows:

Destination Address Range	Link Interface
11000000 00000000 00000000 00000000 through	0
11000000 00111111 11111111 11111111	
11000000 01000000 00000000 00000000 through	1
11000000 01000000 00011111 11111111	
11000000 01000000 00100000 00000000 through	2
11000000 01000001 11111111 11111111	
11000000 01000010 00000000 00000000 through	3
11000001 01111111 11111111 11111111	
otherwise	4

- a. Provide an equivalent forwarding table that translates each of the given ranges into a prefix of the form *a.b.c.d/x* along with the associated link interface. The forwarding table should have six entries (2 for the “otherwise” range, and 4 for the other ranges).
- b. Determine the appropriate link interface for forwarding datagrams with the following destination addresses:
  - i. 11000000 01000010 11000011 00111100
  - ii. 11000000 01000000 00010000 00000001
  - iii. 11000001 10000000 00010001 01110111

**Problem # 2 (8 points):** Consider the following IP-based network with the assigned IP addresses as shown. For each of the following cases, complete the table regarding the datagram as it is forwarded from the source to the destination.

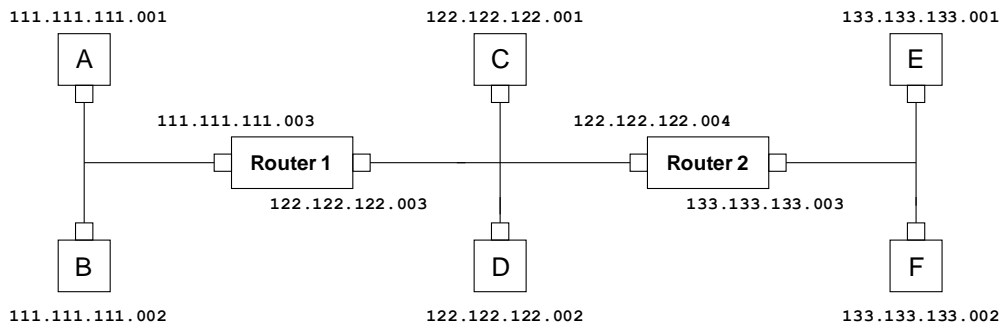

1. Assume that host **F** sends an IP datagram to host **C**.

Source IP address	Destination IP address	Receiving interface IP address that was passed down to the Data Link layer to be used for forwarding


2. Assume that host **F** sends an IP datagram to host **B**.

Source IP address	Destination IP address	Receiving interface IP address that was passed down to the Data Link layer to be used for forwarding

**Problem # 3 (6 points):** Consider a router that interconnects 3 subnets: **Subnet 1**, **Subnet 2**, and **Subnet 3**. Suppose all of the interfaces in each of these 3 subnets are required to have the prefix **224.1.12/24**. Also suppose that **Subnet 1** is required to support 82 interfaces, **Subnet 2** is to support 30 interfaces, and **Subnet 3** is to support 13 interfaces. Provide three network addresses of the form **a.b.c.d/x** that satisfy these constraints.



**Problem # 5 (12 points):** Consider the following network.



Suppose that the link cost  $c(0,3)$  has changed from 5 to 1, re-compute the distance tables for nodes 0, 1, 2, and 3 after only one iteration of a synchronous version of the distance vector. Note that the current tables' values *prior* to the link cost change are as shown in the leftmost column of the tables.

		cost to				
		$D^0$	0	1	2	3
from	0	0	0	4	5	5
	1	1	4	0	1	2
	2	2	5	1	0	1
	3	3	5	2	1	0

		cost to				
		$D^0$	0	1	2	3
from	0	0				
	1	1				
	2	2				
	3	3				

		cost to				
		$D^1$	0	1	2	3
from	0	0	0	4	5	5
	1	1	4	0	1	2
	2	2	5	1	0	1
	3	3	$\infty$	$\infty$	$\infty$	$\infty$

		cost to				
		$D^1$	0	1	2	3
from	0	0				
	1	1				
	2	2				
	3	3				

		cost to				
		$D^2$	0	1	2	3
from	0	0	0	4	5	5
	1	1	4	0	1	2
	2	2	5	1	0	1
	3	3	5	2	1	0

		cost to				
		$D^2$	0	1	2	3
from	0	0				
	1	1				
	2	2				
	3	3				

		cost to				
		$D^3$	0	1	2	3
from	0	0	0	4	5	5
	1	1	$\infty$	$\infty$	$\infty$	$\infty$
	2	2	5	1	0	1
	3	3	5	2	1	0

		cost to				
		$D^3$	0	1	2	3
from	0	0				
	1	1				
	2	2				
	3	3				